

PEA series

INSTRUCTION MANUAL

HANYOUNGNUXCO., LTD

28, Gilpa-ro 71beon-gil, Michuhol-gu, Incheon, Korea
TEL : +82-32-876-4697
http://www.hanyoungnux.com

Thank you for purchasing Hanyoung Nux products.
Please read the instruction manual carefully before using this product, and use the product correctly.
Also, please keep this instruction manual where you can see it any time.

MK1501KE240207

Safety information

Please read the safety information carefully before use, and use the product correctly.
The alerts declared in the manual are classified into **Danger**, **Warning** and **Caution** according to their importance

DANGER	Indicates an imminently hazardous situation which, if not avoided, will result in death or serious injury
WARNING	Indicates a potentially hazardous situation which, if not avoided, could result in death or serious injury
CAUTION	Indicates a potentially hazardous situation which, if not avoided, may result in minor injury or property damage

DANGER

- The input/output terminals are subject to electric shock risk.
- Never let the input/output terminals come in contact with your body or conductive substances.

CAUTION

- Applicable Pollution degree 3 of intended environment.
- Never use it on AC power.
- Be careful of wiring. It may cause explosion, fire, or machine breakdown.
- Do not use the product in a state where the product body or cable is crushed.
- Do not disassemble, repair or modify the product.
- When the lens of the photo sensor is contaminated by foreign substances, use a dry piece of cloth and wipe off the substance lightly. Never use thinner or organic solvents.
- Separate high voltage cable and power line from the sensor wire. Be cautious since using the same pipe during wiring could cause malfunction.
- If the cable needs to be extended, use over 0.3mm² and be cautious because of a possible sudden voltage drop.
- When using the sensor under lights with high frequency, such as fluorescent lamps or mercury lamps, block it with a light shading plate and avoid the lens from facing the light directly.
- If multiple through-beam type photoelectric sensors are installed

WARNING

- This product is not for outdoor use (it may shorten the product lifetime and cause electric shock)
- Do not use this product in places with flammable or explosive gases (it does not have an explosion-proof structure, so there are fire or explosion risks)
- Do not use the product in places where vibrations or shocks exceed the reference values (it has a double insulation structure, but the components may be damaged)

close together, malfunction may happen due to the mutual interference.

- Using inductive load (relay, coil) for the output can cause an instantaneous increase in load by more than two times and damage the TR of the output. Therefore, please set half of the maximum load.
- There is an over-current protecting circuit within the output side that breaks the output when the current is higher than the rated load current. Therefore, please set within 70% of the maximum load.
- Do not use the product in places with heavy dust or debris that can contaminate the lenses and consequently cause malfunctions.
- The contents of this manual may be changed without prior notification
- Any use of the product other than those specified by the manufacturer may result in personal injury or property damage.
- When using the Switching Power Supply as power source, ground the Frame Ground (F.G.) terminal and be sure to connect the noise-cancelling condenser between OV and F.G. terminals
- The power supply should be insulated and limited voltage/current or Class 2, SELV power.

Specification

Sensing mode		Through-beam	Retroreflective (M.S.R.)	Diffuse-reflective
Model	Relay output (AC/DC power)	PEA-T30A	PEA-MSA	PEA-R2A
	NPN Open collector output (DC power)	PEA-T30N	PEA-MSN	PEA-R2N
	PNP Open collector output (DC power)	PEA-T30P	PEA-MSP	PEA-R2P
Sensing distance		30 m	0.1 ~ 5 m	2 m
Hysteresis distance		-		20% or less of detection distance
Detecting object		Ø12 mm more (Opaque)	Ø60 mm more (Opaque)	White paper (100 x 100 mm)
Light source (wavelength)		Infrared light emitting diode (855 nm)	Red light emitting diode (660 nm)	Infrared light emitting diode (855 nm)
Power voltage	Relay output (AC/DC power)	24 ~ 240 V a.c. ±10% or 24 ~ 240 V d.c. ±10% (Ripple max. 10%)		
	Open collector output (DC power)	12 ~ 24 V d.c. Class 2 ± 10% (Ripple max. 10%)		
Power consumption	Relay output (AC/DC power)	• Transmitter Max. 1 VA, • Receiver Max. 2VA	Max. 3 VA	
	Open collector output (DC power)	• Transmitter Max. 15 mA • Receiver Max. 20 mA	Max. 35 mA	
Control output	Relay output (AC/DC power)	• Relay contact output (Contact configuration 1a1b) • Contact Capacity: 30 V d.c. 5A / 250 V a.c. 5 A with resistive load		• Electrical life: Min. 100,000 cycles • Mechanical life: Min. 50 million cycles (Opening/closing frequency 180 times/min)
	Open collector output (DC power)	• NPN or PNP open collector output • Load current - Max. 100 mA (26.4 V d.c. standard)		• Residual voltage - Max. 1.5 V
Operation mode		Light ON / Dark ON button switch type		
Indicator light		Control output indicator light : Orange LED, Stability indicator light : Green LED (However, the Green LED of the through-type emitter is a power indicator)		
Auto-teaching		See How to set sensitivity and operation mode → Section 3.		
AGC		After 20 seconds of unstable light entering on button locked state to stable light entering state		
Sensitivity adjustment		B1 increases the sensitivity and B2 decreases the sensitivity		
Protection circuit	Common	Mutual interference prevention function		
	Open collector output (DC power)	Power reverse connection protection, Output short-circuit over-current protection, Output reverse connection protection, Output short-circuit alarm		
Response time	Relay output (AC/DC power)	Max. 20 ms		
	Open collector output (DC power)	Max. 1 ms		
Insulation Resistance		More than 20 MΩ (500 V d.c. mega)		
Dielectric strength		1,000 V a.c. (50/60 Hz for 1 minute)		
Vibration resistance		10-55Hz, sweep: 1.5mm, X-Y-Z in each direction for 2 hours		
Shock resistance		500 m/s ² , X-Y-Z each direction 3 times		
Ambient illumination		Sunlight : max. 11,000 lx / Incandescent: max 3,000 lx		
Ambient temperature range		Operating temperature : -20 ~ +55 °C, During storage : -40 ~ +70°C (Without condensation or icing)		
Ambient humidity		35 ~ 85 % RH (Without condensation or icing)		
Protection		IP67 (IEC standard)		
Weight (Packing)	Relay output (AC/DC power)	265g (440g)	150g (280g)	145g (260g)
	Open collector output (DC power)	255g (430g)	140g (270g)	140g (255g)
Texture	Case	PC		
	Display	PC		
	Lens	PMMA		
Accessory	Common	Instructions manual, bracket, bolt (M3 X 12 mm)		
	Accessory	Mirror (HY-M5)		
Connection method		Cable type		
Wiring specification	Relay output (AC/DC power)	Ø 6 mm, Through-beam type transmitter: 2-core, Through-beam type receiver, Mirror-reflection type, Diffuse-reflective type: 5-core, 2 m		
	Open collector output (DC power)	Ø 6 mm, Through-beam type transmitter: 2-core, Through-beam type receiver, Mirror-reflection type, Diffuse-reflective type: 5-core, 2 m		
Specifications of the small-sized cable		AWG20 (0.18 mm, 21 wire), Insulation outer diameter: 1.5 mm		


- Mutual interference prevention function
- Resistant to noise by adopting digital signal processing
- M.S.R. that receives only the light reflected from the mirror
- IP67 (IEC standard) protection structure with excellent water resistance
- Realization of long-distance detection by adopting high-performance lens

Suffix code

Model	Code	Content	
PEA-	□ □ □	PEA series	
Sensing mode	T	Through-beam	
	M	Retroreflective	
	R	Diffuse-reflective	
Sensing distance	30	30 m (Through-beam)	
	5	5 m (Retroreflective)	
	2	2 m (Diffuse-reflective)	
Control output	A	Relay contact output	AC/DC power
	N	NPN Open collector output	DC power
	P	PNP Open collector output	DC power

How to set sensitivity and operation mode

NO	Function	Information
①	Button lock & unlock	Press the B1 () button for more than 3 seconds to change (lock or unlock).
③	Through-beam Retroreflective (M.S.R.)	If the B2 () button is pressed for more than 3 seconds in the absence (stable light incident) of a detection object, the sensitivity is automatically set.
	Diffuse-reflective	1) In the presence of a detection object (stable light incident) 2) Release the B2 () button after pressing it for more than 3 seconds. 3) Check the Green + Orange LED cross blinking (try again if either side is not blinking) 4) Press the B2 () button once after removing the detected object (0.5 seconds)
④	Increase sensitivity	Press the B1 () button for less than 3 seconds to increase the fine sensitivity (1 STEP)
⑤	Decrease sensitivity	If the B2 () button is pressed for less than 3 seconds, the fine sensitivity decreases (1 STEP)
⑥	Operation mode change	Press the B1 () + B2 () buttons simultaneously for 5 seconds or longer to change the operation mode (Light ON → Dark ON) After pressing the B1 () + B2 () buttons together for more than 5 seconds, release only B1 () After 5 seconds, release the B2 () button to reset. (Dark ON, sensitivity maximum, button unlock changes, and diffuse reflection type becomes Light ON.)
⑦	Factory reset	Unstable light if it lasts more than 20 seconds, it is adjusted to stable light incident state.
⑧	AGC	

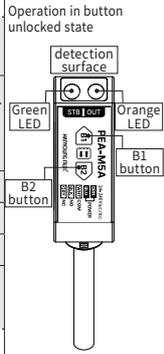


Indicator light state


①	Button lock	Within 3 seconds (Green blinking) → After 3 seconds (Orange ON), release the B1 button, Green + Orange blinking (2 seconds) ※ Setting value cannot be changed when button locking or unlocking is operated
②	Button unlock	Within 3 seconds (Green + Orange blinks) → After 3 seconds (Orange ON), release the B1 button, Green + Orange blinks (2 seconds)
③	Through-beam Retroreflective (M.S.R.)	Within 3 seconds (Green blinking) → After 3 seconds (Orange ON) → When the B2 button is released, Green + Orange blinks alternately (5 seconds) → Green blinks (2 seconds)
	Diffuse-reflective	If you press the B2 button once when there is Green + Orange blinking (0.5 seconds), Green blinks 6 times. ※ If auto-teaching is attempted while the light from the emitter does not enter the receiver, the Orange blinks (Error displayed for 2 seconds)
④	Increase sensitivity	Within 3 seconds (Green blinking)
⑤	Decrease sensitivity	Within 3 seconds (Green blinking)
⑥	Operation mode change	Within 5 sec (Green + Orange OFF) → After 5 sec (Green + Orange ON) → Release B1 + B2 button to blinking Green (2 sec)
⑦	Factory reset	Within 5 sec (Green+Orange OFF) → After 5 sec (Green+Orange ON) → Release B1 button to blinking Green + Orange ON (5 sec) → After 5 seconds (Green ON) → B2 button to blinking Green (2 seconds)
Etc	Save previous execution value	① ~ ⑦ Saved after a certain period of time after performing the operation (no arbitrary operation), blinking Green (1 time) After saving the operation value, even if the power is turned off and on, the previous operation value is saved (automatically saved even in case of power failure)

Connection diagram


Relay contact output

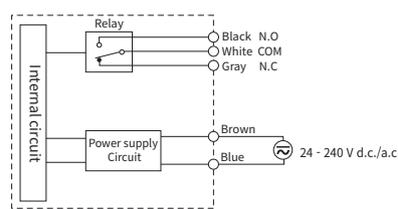


Dimension

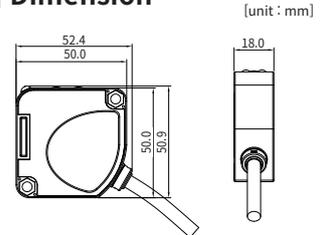


NPN TYPE

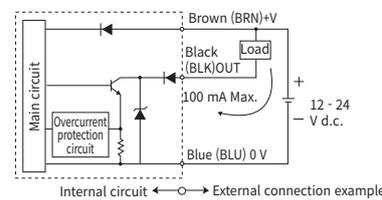

PNP TYPE

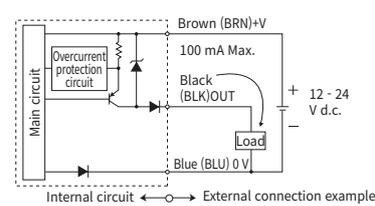


How to install




Accessories

Bracket

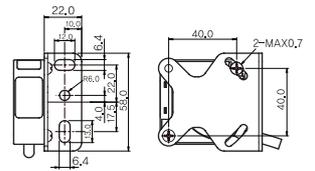

Reflector (HY-M5)



Output operation characteristic

