


Linear Lighting – RL08C0TA-5

120 LEDs/m-12V-8mm Flexible Strip Light



Technical Application Guide

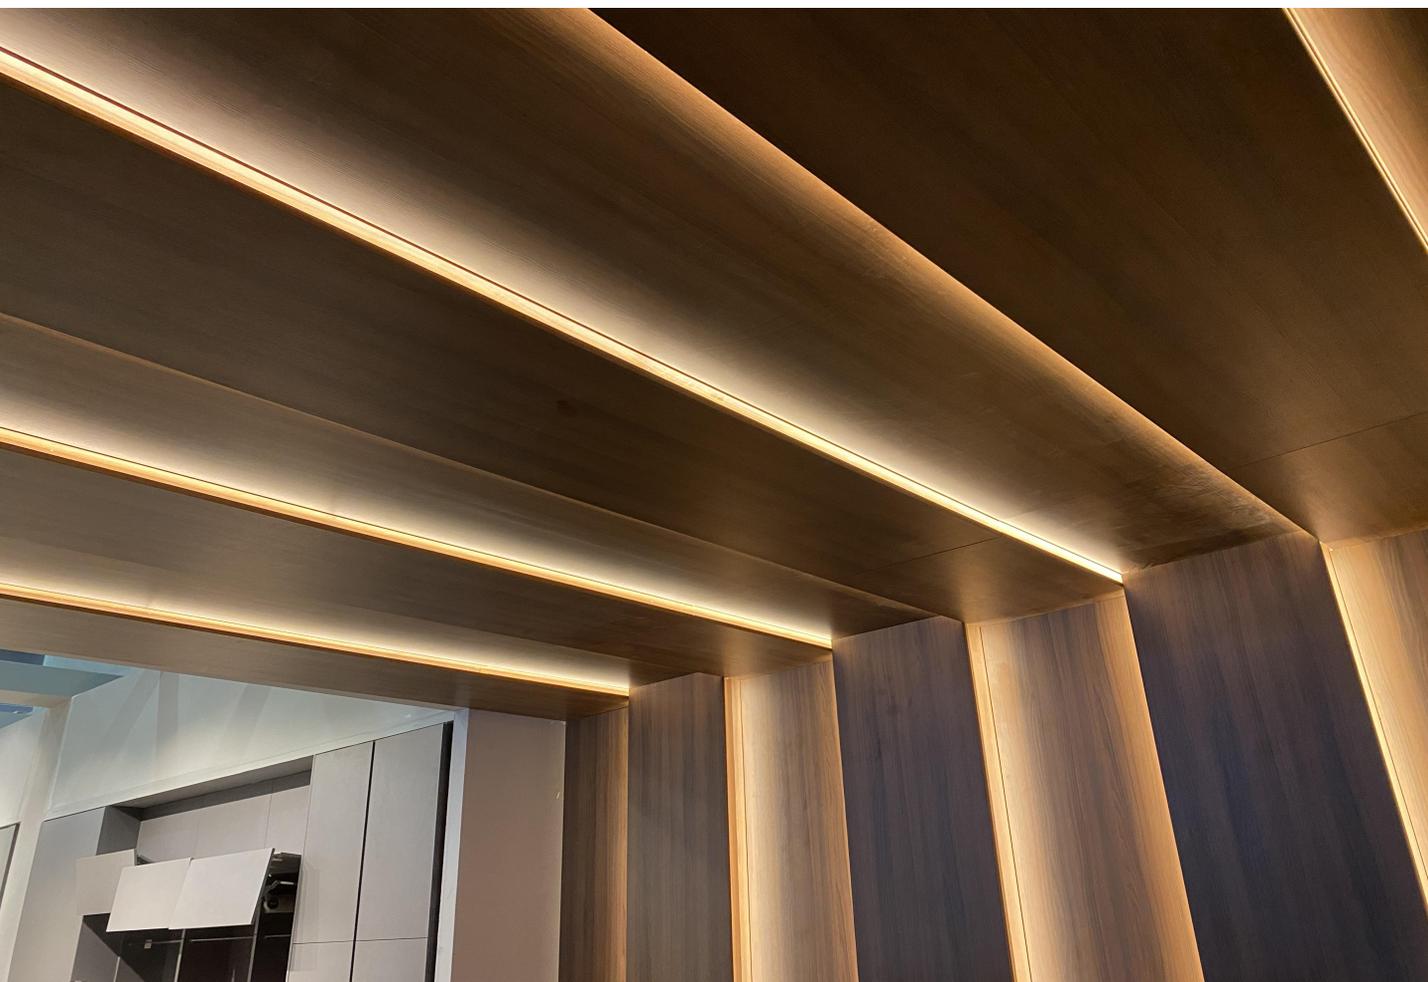

Version: 7.0

Issued on: October 18th, 2023

RL08C0TA-5


120 LEDs/m-12V-8mm Flexible Strip Light

120 Leds/m-12V-8mm Flexible Strip for 9W/m constant voltage linear lighting.

Long lifespan with low light attenuation.

FPC adopts PI film, which makes the solder pad less susceptible to damage during high-temperature welding.

FPC offers an optimal heat dissipation (junction to the heat sink) that guarantees optimal cooling of the LEDs to enable outstanding lifetime and color consistency ratings.



ADHESIVE TAPE
High thermal conductivity and resistance to harsh environments for easy and robust mounting.

Reliability

Category	Item	Reference Standards	Test Conditions	Result
IP grade test	Waterproof test	GB/T 4208IEC 60529	25±2°C @≤65%RH	IP20 IP54 IP65 IP67 IP68
	Dustproof test	GB/T 4208IEC 60529	25±2°C @≤65%RH	IP67 IP68
Safety test	Flame retardant test	GB7000.1IEC 6059801	25±2°C @≤65%RH	Pass
Environmental test	Hi-Low temperature cycle test	GB/T 2423.22IEC 60068-2-14	-40°C@30mins →25°C@5mins →85°C@30mins →25°C@5mins →-40°C@30mins; 168 hours	Pass
	Thermal shock	GB/T 2423.22IEC 60068-2-14	-40°C→70°C 100 circles	Pass
	Hi-temperature storage test	GB/T 2423.3IEC 60068-2-78	Ta=80°C	Pass
	Low-temperature storage test	GB/T 2423.1IEC 60068-2-1	Ta=-40°C	Pass
	Hi-temperature & Hi-Humidity Life	GB/T 2423.2IEC 60068-2-2	Ta=70°C @ RH=90%	Pass
	UV test	GB/T 16422.3ISO 4892-3	50±3°C,10±5%RH,Exposed at radiation 5 hours, spaying water 1 hour in 20±3°C,4 circles	Pass

RL08C0TA-5


120 LEDs/m-12V-8mm Flexible Strip Light

120 LEDs/m-12V- 8mm



3-year warranty

P/N	Dimensions (L x W x H)		Cutting unit (L2)		Number of LEDs	
RL08C0TA-5	10000*8*1.5mm	393.7*0.31*0.06inch	25mm	0.98inch	120 /m	36/ft

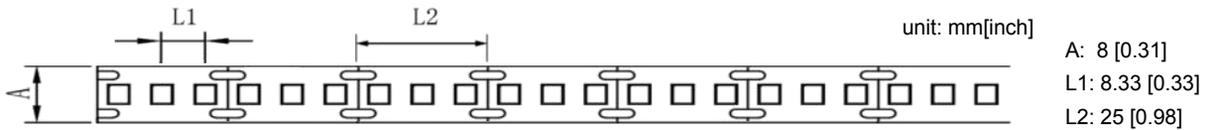

Protection Level

Protection Level:	IP 20	IP 54	IP 54	IP 65	IP 65	IP 67	IP 68
Available	Non-protective	Silicone Spray	Gel Coating	Silicone Spray	Silicone Tube	Silicone Filling	Silicone Extrusion

Basic Parameters :

P/N	LED Color	CCT (K)	CRI	SDCM	Beam Angle(°)	Luminous Flux (Lm/m)	Luminous Efficacy (Lm/W)	Working voltage (V DC)	Working current (mA)	Power (W/m)
									1m[39.37in]	1m[39.37in]
RL08C0TA-5	White	3000	≥90	≤5	≥115	1005	113	12	750	9
RL08C0TA-5	White	4000	≥90	≤5	≥115	1105	124	12	750	9
RL08C0TA-5	White	6500	≥90	≤5	≥115	1085	122	12	750	9

P/N	Qty (m/reel)	Qty (m/carton)	Total Qty (m)	Total weight		Outer carton					
						length		width		height	
				(Kg)	(lb)	(mm)	(inch)	(mm)	(inch)	(mm)	(inch)
RL08C0TA-5	10	50	500	10.5	23.15	460	18.11	370	14.57	255	10.04


P/N	IP Grade	Operating Temperature		Storage Temperature		Standard length		Max. cascading length		LED Qty (pcs)	Weight	
		(°C)	(°F)	(°C)	(°F)	(m)	(inch)	(m)	(inch)		(g/m)	(lb/m)
RL08C0TA-5	IP20	-25~+60	-13~+140	-25~+70	-13~+158	10	393.7	5	196.8	120	--	--

RL08C0TA-5

120 LEDs/m-12V-8mm Flexible Strip Light

Profile Drawings

Unit: mm [inch]

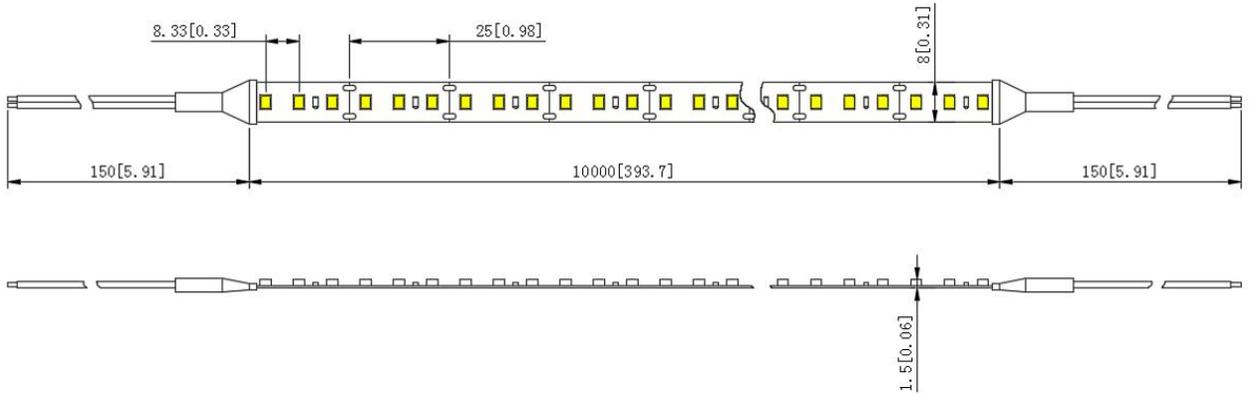


Optional Parts:

Category	Part Name	Figure	Specifications/Description	Article Number	Color	IP Grade	Notes
Snap-fit joints	Snap-fit joints		Snap-fit joints /23.5*4*2mm/QJ-KZ-10 (equipped with screws)	207-076	/	/	/
	Connector		8mm width, single color, IP20 LED strips/ cable-board connector /16*10.4*4.5mm	1CN-07-070	/	/	/
	Connector		8mm width, single color, IP20 LED strips/board-board connector/20.6*11*4.6mm	1CN-07-072	/	/	/
	Connector		Connector /board-cable-board /8mm LED strips /16*10.4*4.5mm/QJ-SL-10BXB-2	1CN-07-071	/	/	/
	Connector		8mm width, single color, IP20 LED strips/ cable-board connector/24.27*14.6*7.66mm/SE-N8XB-2	1CN-07-116	/	/	/
Terminal Connector	Connector		Connector /cable-cable /25*6.7*6.65mm/1P/QJ-XC-JXD-D1	1CN-07-065	/	/	/
	Connector		Connector / cable-cable /25*10.6*6.65mm/2P/QJ-XC-JXD-H2	1CN-07-066	/	/	/
	Connector		Connector / cable-cable /25*12.8*6.65mm/1P/QJ-XC-JXD-T1	1CN-07-067	/	/	/
	Connector		Connector / cable-cable /28.6*16.6*6.65mm/2P/QJ-XC-JXD-T2	1CN-07-068	/	/	/
	Connector		Connector / cable-cable /22*9.5*6mm/2P/QJ-XC-JXD-D2	1CN-07-069	/	/	/


RL08C0TA-5

120 LEDs/m-12V-8mm Flexible Strip Light

Packaging Diagram

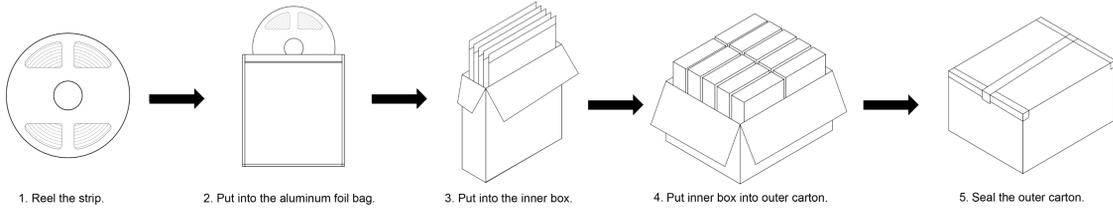

Connection Instruction

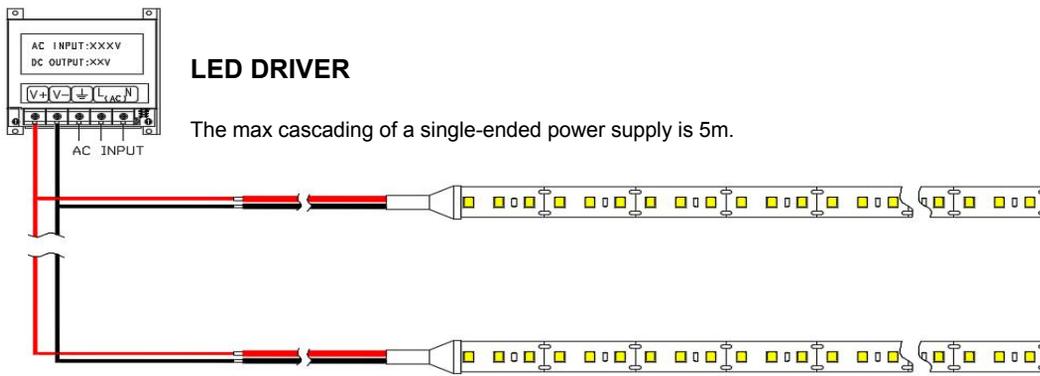


Parts & Tools



Led Strip



Electrical Drill & Drilling bit



Scissor




Wire


Installation Steps



Make sure the mounting surface is clean before installation.



Calculate the needed length and cut off the extra length along the cutting mark if necessary. If wires are needed, please weld them at the next location with a printed mark.

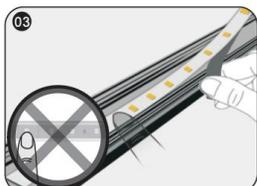

While sticking strips, peel off the release paper of the tape step by step. Don't peel off all at a time to avoid getting your strip in a mess.

△Notes: No pressing the LED!


RL08C0TA-5

120 LEDs/m-12V-8mm Flexible Strip Light

Installation Steps



Stick Mylar tape to isolate the cutting position from the bottom of profile inner slot to avoid short-circuit.




The installation at the corner is shown as the figure.

△Notes: No bending it into right angle; No twisting it to stick on the mounting surface.



Connect strip wires to the output terminal of the power supply, and dispose with waterproof, insulation, short-circuit, and anti-corrosion protection at wire joints and cut section of your strip (if any).


Installation Attention

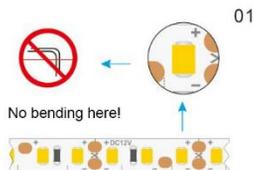

Do not bend the strip at the position of LED SMD.



Do not twist the strip.

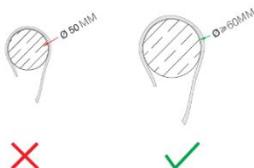

Do not wind the strip with a diameter <5cm.

RL08C0TA-5

120 LEDs/m-12V-8mm Flexible Strip Light

Troubleshooting

Malfunctions	Possible Causes	Solutions
All LEDs Stopped Working	The power supply did not connect to power grid.	Power on.
	Broken-circuit or Short-circuit.	Troubleshoot the problems and power on again.
	The wires of strips connect to the power supply terminal reversely.	Check the connection and ensure the polarity of the wires is connected correctly.
Part of LEDs Stopped Working	Part of power supplies have output failure.	Check the power supply system.
	Part of wires of strips have breakdown.	
	Reverse connection of polarity.	Correct connection.
LEDs Too Weak or Uneven	Overloaded power supply.	Replace it with a powerful one.
	Excessive power loss of the circuit or the power loss of each circuit differs a lot.	Ensure working voltage of strips is within $\pm 5\%V$ of rated voltage. 1. Shorten the length of wires between the first strip and power supply or replaced with wires with larger diameter. 2. Ensure the cascading qty of each circuit does not exceed the allowed range and is well distributed.
	Excessive cascading qty in series.	Adjust the cascading qty for strip to ensure the qty for each electrical circuit is within the maximum cascading qty.
LEDs Flickering	Exposed or loose joints of wires.	Find out and tackle malfunction immediately.
	Failures in power supply.	Replace it with a new one.

Declaration

- If the external flexible cable is damaged, please replace it from its manufacturer, service agent, or qualified person to avoid a hazard.
- For the specific installation and cautions, please refer to the user manual.
- The given data in this specification is based on our standard product. There may exist slight difference compared with actual products.
- All Illustrations in this specification are for reference only.
- This product is subject to change or modification without prior notice.
- RISHANG OPTOELECTRONICS CO., LTD. Reserves the right of a final explanation for this specification.

Revision History

Version	Revised by	Revised item	Release date
V7.0	Wei Fan Song	first release	June.04.2023