


# LED DOWNLIGHT

Product&amp;Family Code: 016 040 0009


**VALERIA-9**


## Technical Drawing

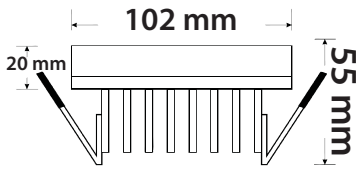

Ø 95 mm

## Photometric Diagram

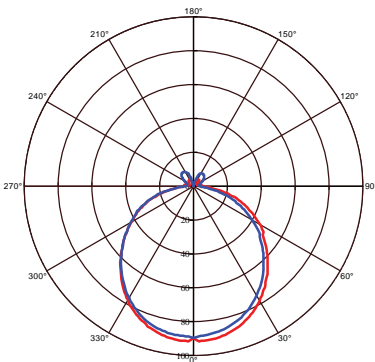

C0 Plane beam angle(50%): 115.6(DEG) C90 Plane beam angle(50%): 113.7(DEG)  
 C0 Plane beam angle(50%): 115.6(DEG) C90 Plane beam angle(50%): 113.7(DEG)

## Technical Data

Voltage (V)	180-265V
Product Wattage (W)	9
Equivalence with incandescent lamp	72
Colour Render Index (Ra)	>Ra80
Colour Temperature (K)	4200K
Materials	Aluminium + Acrylic
Protection Class	II
Dimmable	No
EEL	A to A++
Warm-up time up to 60 % of the full light output	Instant Full Light
Luminous Flux (lm)	720
Luminous Efficacy (lm/W)	80
Rated Life (hrs) ⌚	30.000
IP Rating	20
Power Factor	>0.5
Beam Angle	120°
Starting Time	<0.2s
Number of ON-OFF cycling	x20.000

## Applications

- Airport, Bathroom, Bedroom, Car Park, Cinema, Gallery, Hospital, Hotel, Kitchen, Museum etc.



## Features

- High Lumen and CRI, Good quality & Constant Current driver.
- High heat dissipation, low carbon and environmental protection.
- SMD LED Lamp Base.

