


R50 LED BULB


 Product&Family Code: **001 040 0006**
REFLED-6


Technical Drawing



Technical Data	
Voltage (V)	220-240V
Product Wattage (W)	6
Equivalence with incandescent lamp	48
Colour Render Index (Ra)	>Ra80
Colour Temperature (K)	4200K
Materials	Aluminium Housing with PMMA Diffuser
Protection Class	-
Dimmable	No
EEL	A+
Warm-up time up to 60 %of the full light output	Instant Full Light
Luminous Flux (lm)	391
Luminous Efficacy (lm/W)	65
Rated Life (hrs) Ⓢ	25,000
IP Rating	-
Power Factor	>0.5
Beam Angle Δ	115°
Starting Time	<0.5
Number of ON-OFF cycling	x12,500

Photometric Diagram

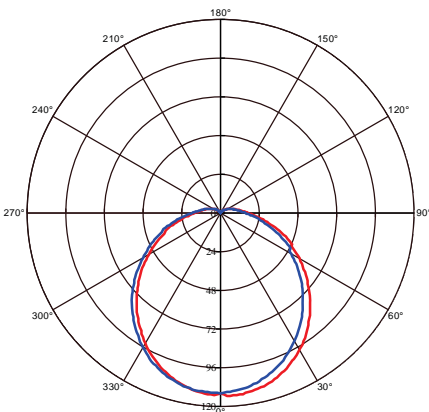

C0 Plane beam angle(50%): 115.2(DEG) C90 Plane beam angle(50%): 115.1(DEG)

Applications

- The luminaire is an excellent solutions for market, museum, restaurant, show room, and other spot lighting needed.



Features

- Low power consumption
- Efficient replacement for incandescent lamps
- Mercury free, no UV and IR radiation
- Instant on, 100% light output

	12.500X ON / OFF	NO UV / IR	mA 92
	Start Up Time <0.5	%85 ENERGY Saving	25000h Lifetime
	0,0mg	Optimally	Ra >80
	Warm Up %60 < 0.5 sc.		PF >0.5 Power Factor
	115°		

