



LED BULB




Technical Drawing



Photometric Diagram

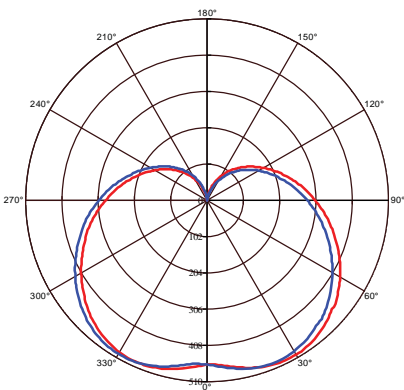

↳ C0 Plane beam angle(50%) ↳ C90 Plane beam angle(50%)
 C0 Plane beam angle(50%):200.2(DEG) C90 Plane beam angle(50%):199.8(DEG)

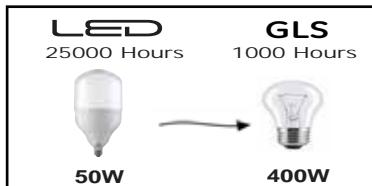

Product&Family Code:

001 016 0050

TORCH-50

Technical Data	
Voltage (V)	175-250V
Product Wattage (W)	50
Equivalence with incandescent lamp	400
Colour Render Index (Ra)	>Ra75
Colour Temperature (K)	3000K-4200K-6400K
Materials	Aluminium + PC
Protection Class	-
Dimmable	No
EEI	A⁺
Warm-up time up to 60 %of the full light output	Instant Full Light
Luminous Flux (lm)	4000
Luminous Efficacy (lm/W)	80
Rated Life (hrs) ⌚	25,000
IP Rating	-
Power Factor	>0.5
Beam Angle ☆	200°r
Starting Time	>0.2s
Number of ON-OFF cycling	x20,000

Applications

- Applicable to the shops along the street, shops, shopping malls supermarkets and other indoor lighting places.



Features

- Low power consumption
- Efficient replacement for incandescent lamps
- Mercury free, no UV and IR radiation
- Instant on, 100% light output

