



LED BULB

 Product & Family **001 001 0008**
FONIX-8

Technical Data	
Voltage (V)	175-250V
Product Wattage (W)	8
Equivalence with incandescent lamp	64
Colour Render Index (CRI)	80
Colour Temperature (K)	3000K-4200K-6400K
Materials	Aluminium Housing with PMM Diffuser
Protection Class	-
Dimmable	No
EEI	
Warm-up time up to 60 % of the full light output	Instant Full Light
Luminous Flux (lm)	630
Luminous Efficacy (lm/W)	78
Rated Life (hrs)	25,000
IP Rating	-
Power Factor	>0.5
Beam Angle	105°
Starting Time	<0.5
Number of ON-OFF cycles	>500


Technical Drawing



Photometric Diagram

Applications

- The luminaire is an excellent solutions for market, museum other spot lighting needed.

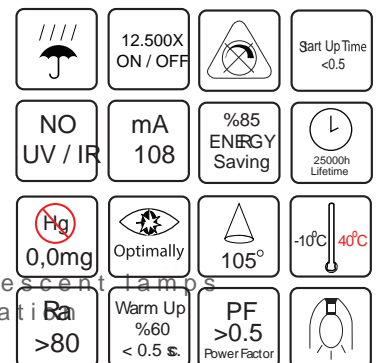

Features

- Low power consumption
- Efficient replacement for incandescent lamps
- Mercury free, no UV and IR radiation
- Instant on, 100% light output

LED 25000 Hours	GLS 1000 Hours
8W	64W

