



LED BULB

 Product & Family **001 002 0004**
PLUS-4

Technical Data	
Voltage (V)	175-250V
Product Wattage (W)	4
Equivalence with incandescent lamp	32
Colour Render Index (Ra)	80
Colour Temperature (K)	3000K-4200K-6400K
Materials	Aluminium Housing with PMM Diffuser
Protection Class	-
Dimmable	No
EEI	
Warm-up time up to 60 % of the full light output	Instant Full Light
Luminous Flux (lm)	250
Luminous Efficacy (lm/W)	62.5
Rated Life (hrs)	25,000
IP Rating	-
Power Factor	>0.4
Beam Angle	105°
Starting Time	<0.5
Number of ON-OFF cycles	12500


Technical Drawing



Photometric Diagram

Applications

- The luminaire is an excellent solutions for market, museum other spot lighting needed.

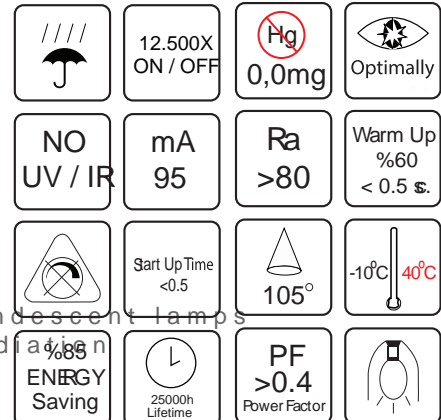

Features

- Low power consumption
- Efficient replacement for incandescent lamps
- Mercury free, no UV and IR radiation
- Instant on, 100% light output

LED 25000 Hours	GLS 1000 Hours
4W	32W

SMD LED
4V
YEARS GUARANTEE

GU10