



LED FILAMENT BULB

 Product&Family Code: **001 013 0004**
FILAMENT CANDLE-4


Technical Drawing

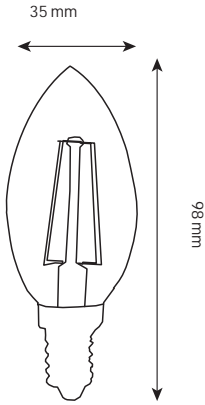

Photometric Diagram

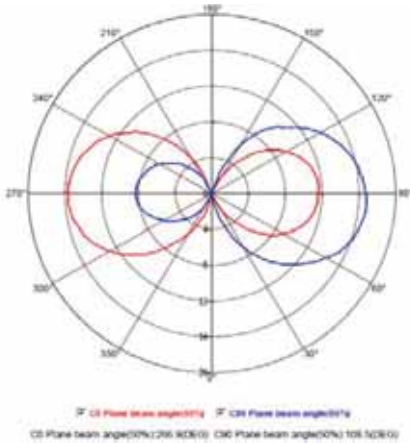

| Technical Data | |
|--|--------------------|
| Voltage (V) | 220-240V |
| Product Wattage (W) | 4 |
| Equivalence with incandescent lamp (W) | 32 |
| Colour Render Index (Ra) | >Ra70 |
| Colour Temperature (K) | 2700K-4200K |
| Materials | Glass |
| Protection Class | - |
| Dimmable | No |
| EEL | A+ |
| Warm-up time up to 60 % of the full light output | Instant Full Light |
| Luminous Flux (lm) | 320 |
| Luminous Efficacy (lm/W) | 80 |
| Rated Life (hrs) ⌚ | 20,000 |
| IP Rating | - |
| Power Factor | >0.5 |
| Beam Angle ☆ | 360°r |
| Starting Time | >0.5s |
| Number of ON-OFF cycling | x10,000 |

Applications

- Chandeliers, Home, Shop, Indoor etc.



Features

- Very low energy consumption
- High Lumen and CRI, good quality
- High heat dissipation, low carbon and environmental protection

