



HIGH-VOLTAGE HIGH-CURRENT DARLINGTON TRANSISTOR ARRAYS

■ DESCRIPTION

The **ULN2004** are high-voltage, high-current darlington drivers comprised of seven NPN darlington pairs.

All units feature integral clamp diodes for switching inductive loads.

Applications include relay, hammer, lamp and display (LED) drivers.

■ FEATURES

*Output current (single output): 500mA (MAX.)


*High sustaining voltage output: 50V (MIN.)

*Output clamp diodes


*Inputs compatible with various types of logic

■ ORDERING INFORMATION

*ULN2004ADR	SOP-16	Tape Reel
*ULN2004AN	DIP-16	Tube




SOP-16




DIP-16

■ PIN CONNECTION

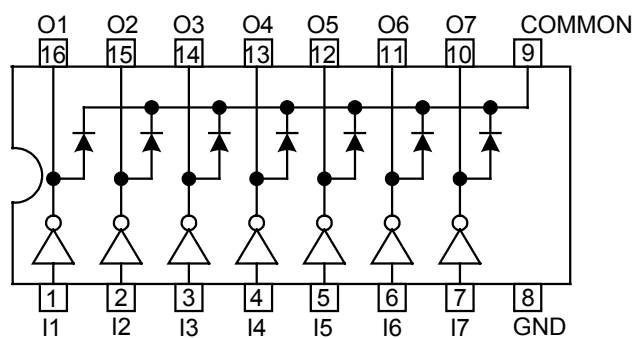

■ BLOCK DIAGRAM

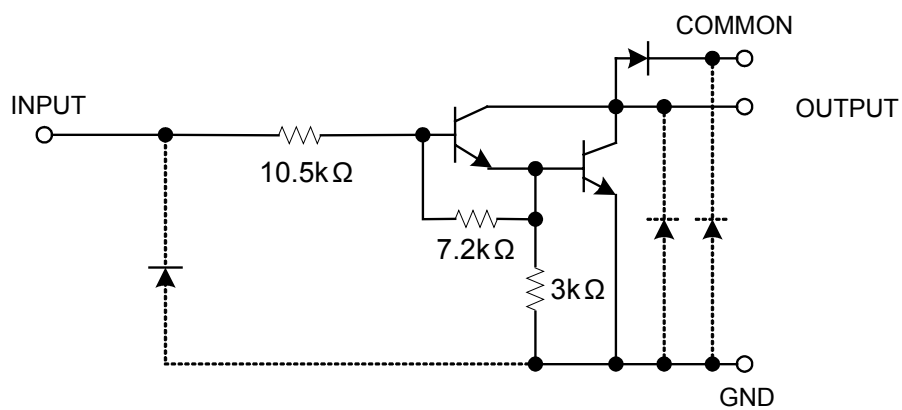

Note: The input and output parasitic diodes cannot be used as clamp diodes.

■ ABSOLUTE MAXIMUM RATINGS (Ta=25°C)

PARAMETER		SYMBOL	RATING	UNIT
Output Sustaining Voltage		V_{OUT}	-0.5~50	V
Output Current		I_{OUT}	500	mA / ch
Input Voltage		V_{IN}	-0.5~30	V
Clamp Diode Reverse Voltage		V_R	50	V
Clamp Diode Forward Current		I_F	500	mA
Power Dissipation	DIP-16	P_D	1.47	W
	SOP-16		0.625	W
Junction Temperature		T_J	+125	
Operating Temperature		T_{OPR}	0~+70	
Storage Temperature		T_{STG}	-40~+150	

Note 1. Absolute maximum ratings are those values beyond which the device could be permanently damaged.

Absolute maximum ratings are stress ratings only and functional device operation is not implied.

2. The device is guaranteed to meet performance specification within 0 ~+70 operating temperature range and assured by design from -20 ~+85 .







■ RECOMMENDED OPERATING CONDITIONS (Ta=-40~+85)

CHARACTERISTIC		SYMBOL	TEST CONDITIONS		MIN	TYP	MAX	UNIT
Output Sustaining Voltage		V _{OUT}			0		50	V
Output Current	DIP-16	I _{OUT}	T _{pw} = 25ms 7 Circuits Ta = 85 TJ = 120	Duty = 10%	0		370	mA/ch
	Duty = 50%			0		130		
	Duty = 10%			0		233		
	Duty = 50%			0		70		
Input Voltage		V _{IN}			0		24	V
Input Voltage (Output On)		V _{IN (ON)}	I _{OUT} = 400mA, h _{FE} = 800		6.2		24	V
Input Voltage (Output Off)		V _{IN (OFF)}			0		1.0	V
Clamp Diode Reverse Voltage		V _R					50	V
Clamp Diode Forward Current		I _F					350	mA
Power Dissipation	DIP-16	P _D	Ta = 85				0.76	W
	SOP-16		Ta = 85				0.325	

■ ELECTRICAL CHARACTERISTICS (Ta=25 unless otherwise specified)


CHARACTERISTIC	SYMBOL	TEST CIRCUIT	TEST CONDITIONS	MIN	TYP	MAX	UNIT
Output Leakage Current	I_{LEAK}	1	$V_{CE} = 50 V, T_a = 25$			50	μA
			$V_{CE} = 50 V, T_a = 85$			100	
Collector-Emitter Saturation Voltage	$V_{CEO(SAT)}$	2	$I_{OUT} = 350 mA, I_{IN} = 500 \mu A$		1.3	1.6	V
			$I_{OUT} = 200 mA, I_{IN} = 350 \mu A$		1.1	1.3	
			$I_{OUT} = 100 mA, I_{IN} = 250 \mu A$		0.9	1.1	
DC Current Transfer Ratio	h_{FE}	2	$V_{CE} = 2 V, I_{OUT} = 350 mA$	1000			
Input Current (Output On)	$I_{IN(ON)}$	3	$V_{IN} = 9.5 V, I_{OUT} = 350 mA$		0.8	1.2	mA
Input Current (Output Off)	$I_{IN(OFF)}$	4	$I_{OUT} = 500 \mu A, T_a = 85^\circ C$	50	65		μA
Input Voltage (Output On)	$V_{IN(ON)}$	5	$V_{CE} = 2 V, I_{OUT} = 350 mA$			4.7	V
			$h_{FE} = 800, I_{OUT} = 200 mA$			4.4	
Clamp Diode Reverse Current	I_R	6	$V_R = 50 V, T_a = 25^\circ C$			50	μA
			$V_R = 50 V, T_a = 85^\circ C$			100	
Clamp Diode Forward Voltage	V_F	7	$I_F = 350 mA$			2.0	V
Input Capacitance	C_{IN}				15		pF
Turn-On Delay	t_{ON}	8	$V_{OUT} = 50 V, R_L = 125 \Omega$ $C_L = 15 pF$		0.1		μs
Turn-Off Delay	t_{OFF}	8	$V_{OUT} = 50 V, R_L = 125 \Omega$ $C_L = 15 pF$		0.2		

■ TEST CIRCUIT

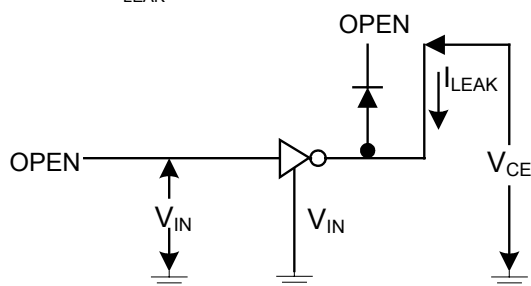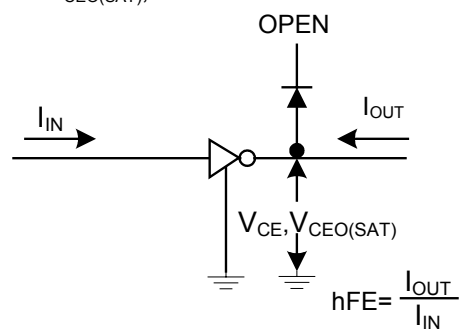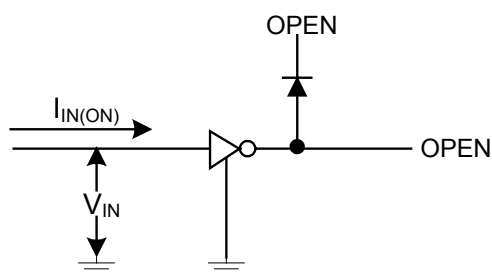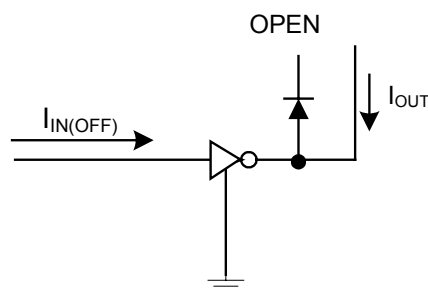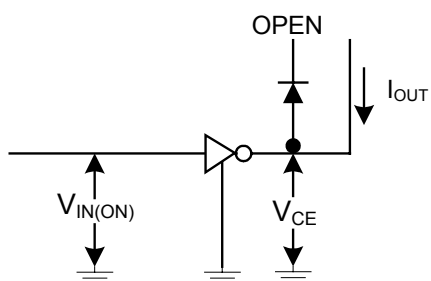
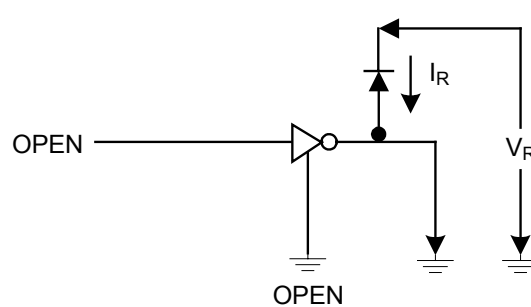
1. I_{LEAK} 2. $V_{CEO(SAT)}, h_{FE}$ 3. $I_{IN(ON)}$ 4. $I_{IN(OFF)}$ 5. $V_{IN(ON)}$ 6. I_R 

■ TEST CIRCUIT(cont.)

7. V_F

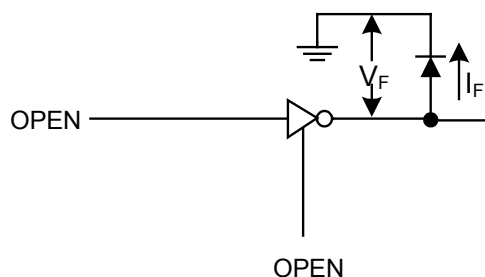

8. t_{ON} , t_{OFF}

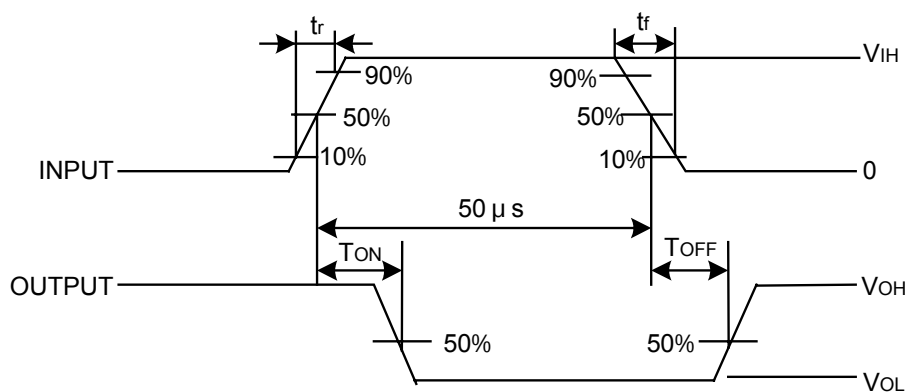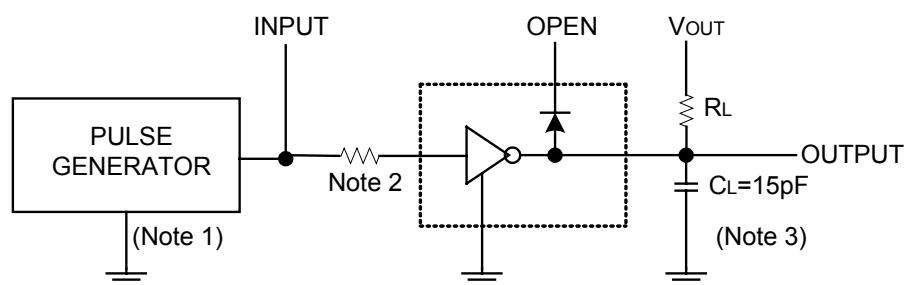

Note1: Pulse width 50 μ s ,duty cycle 10%
Output impedance 50 Ω , t_r 5ns, t_f 10ns

Note2: See below

INPUT CONDITION







TYPE NUMBER	R1	V_{IH}
ULN2004	0	8V

Note3: C_L includes probe and jig capacitance






■ PRECAUTIONS FOR USING

This IC does not include built-in protection circuits for excess current or overvoltage. If this IC is subjected to excess current or overvoltage, it may be destroyed. Hence, the utmost care must be taken when systems which incorporate this IC are designed. Utmost care is necessary in the design of the output line, COMMON and GND line since IC may be destroyed due to short-circuit between outputs, air contamination fault, or fault by improper grounding.

■ TYPICAL CHARACTERISTICS

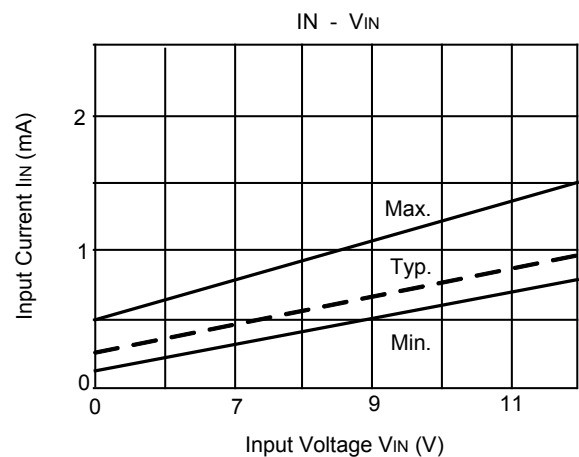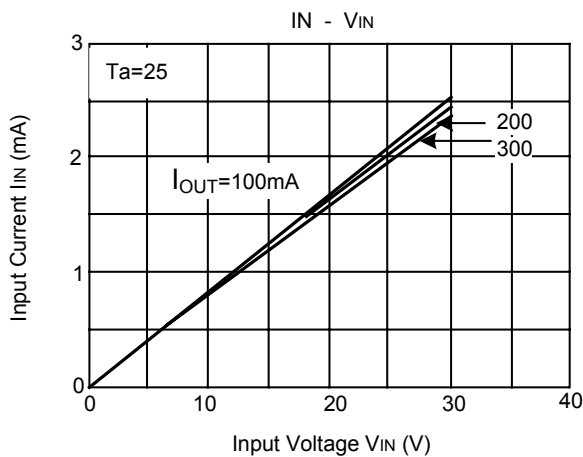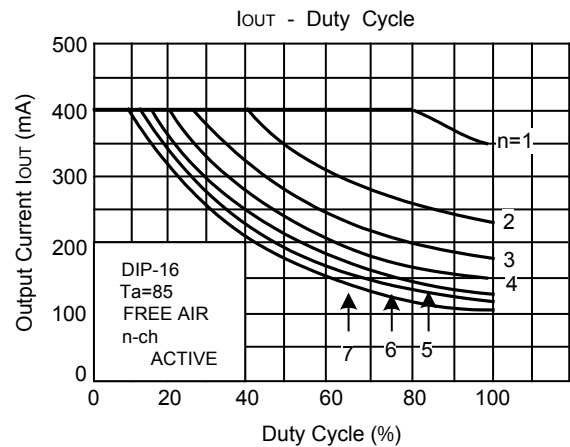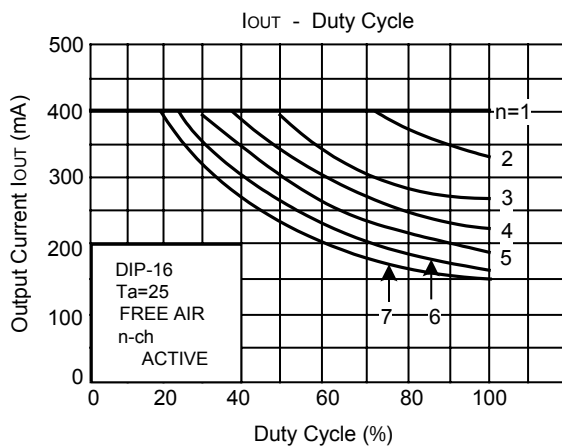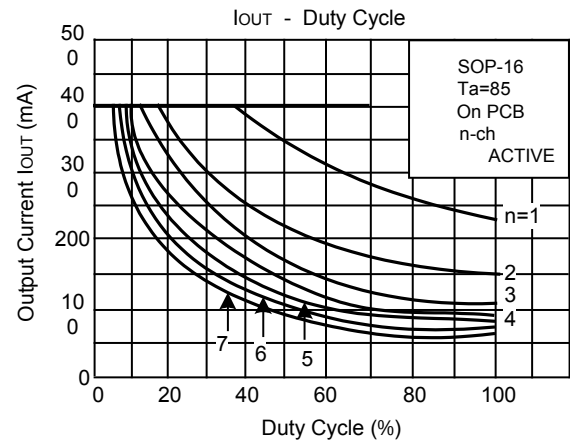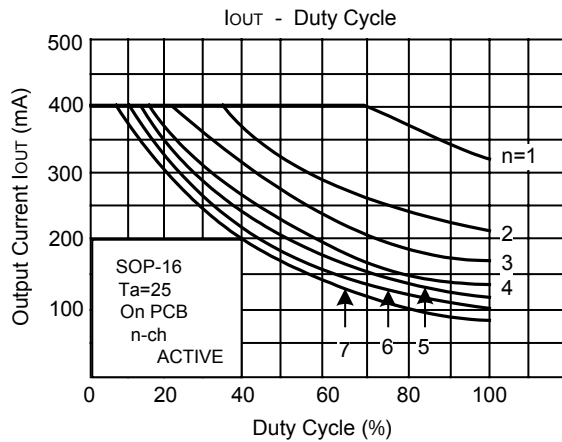

TYPICAL CHARACTERISTICS(cont.)

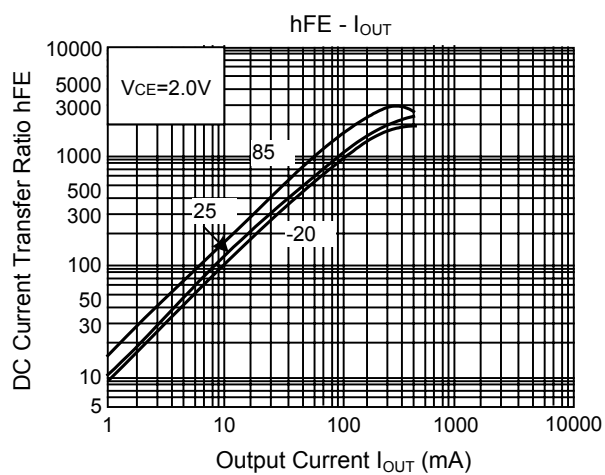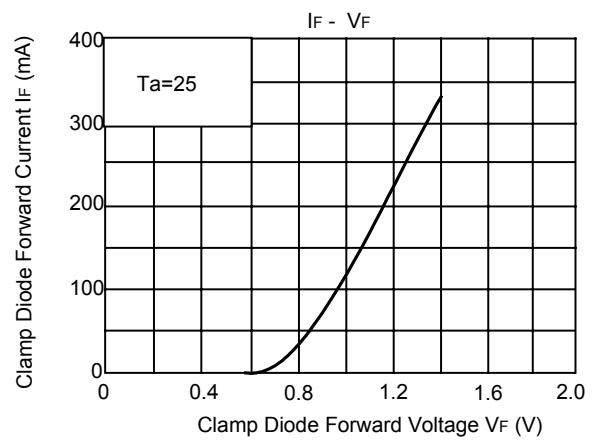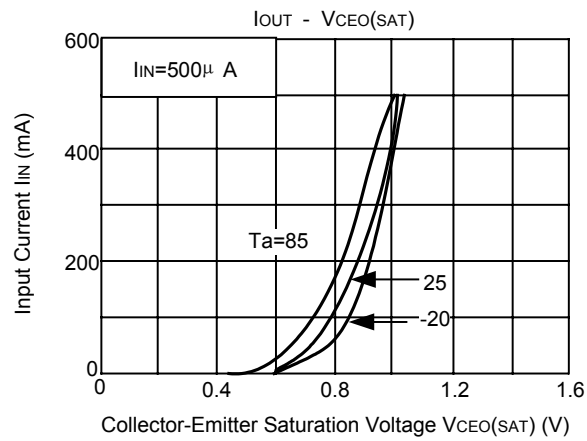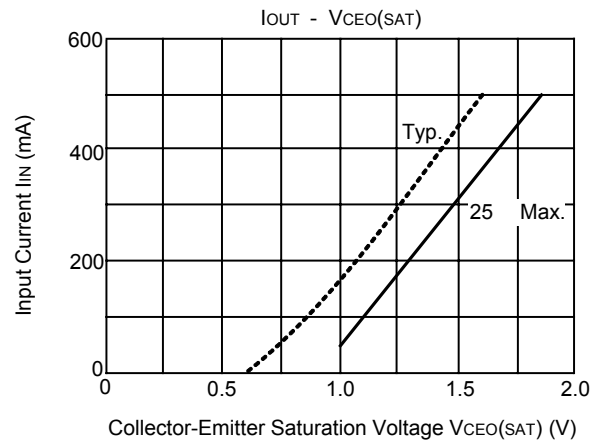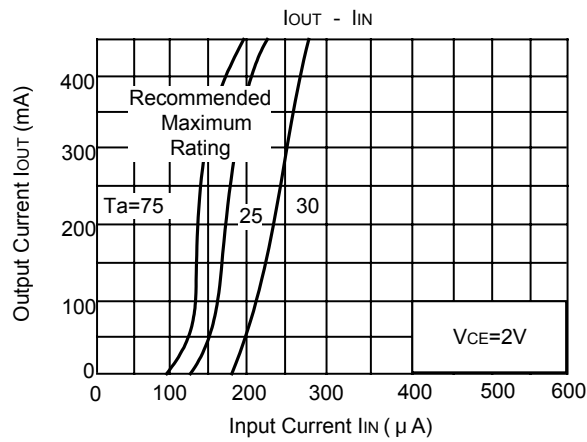

■ TYPICAL CHARACTERISTICS(cont.)

