



LED SPOTLIGHT

Product&Family Code: 017 002 0008


TOKYO



Technical Drawing

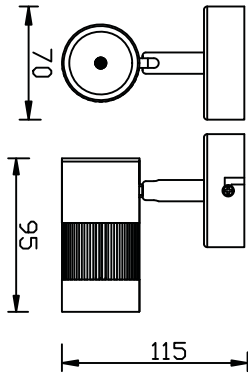

Photometric Diagram

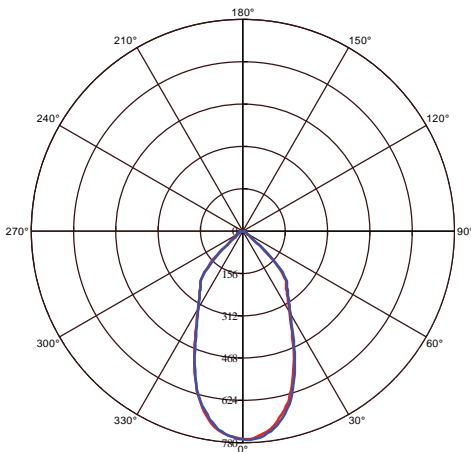

CO Plane beam angle(50%) C90 Plane beam angle(50%)

CO Plane beam angle(50%):53.0(DEG) C90 Plane beam angle(50%):53.0(DEG)

Technical Data	
Voltage (V)	100-240V
Product Wattage (W)	8
Equivalence with incandescent lamp(W)	64
Colour Render Index (Ra)	>Ra70
Colour Temperature (K)	4200K
Materials	Aluminium
Protection Class	II
Dimmable	No
EEL	A to A++
Warm-up time up to 60 %of the full light output	Instant Full Light
Luminous Flux (lm)	500
Luminous Efficacy (lm/W)	62
Rated Life (hrs) ⌚	40.000
IP Rating	20
Power Factor	>0.5
Beam Angle	53°
Starting Time	<0.2s
Number of ON-OFF cycling	x20000

Applications

- Spot lighting is your best choice when compared to other lights for areas such as dining rooms, kitchens, shopping center and even offices.



Features

- High Lumen and CRI, Good quality & Constant Current driver.
- High heat dissipation, low carbon and environmental protection.
- COB LED Lamp Base.
- Very low energy consumption.

