


LED CEILING LAMP


 Product&Family Code: **036 007 0001**
LİKYA-1

CHROME

Technical Drawing

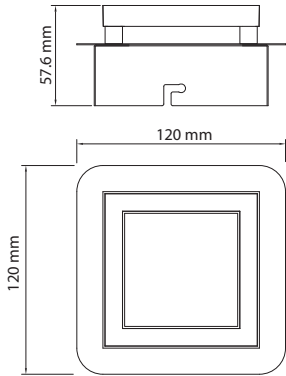

Photometric Diagram

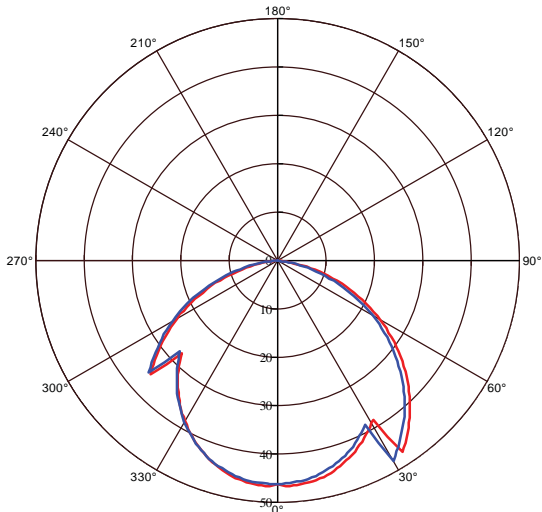

C0 Plane beam angle(50%):119.9(DEG) C90 Plane beam angle(50%):118.8(DEG)

C0 Plane beam angle(50%):119.9(DEG) C90 Plane beam angle(50%):118.8(DEG)

Technical Data	
Voltage (V)	220-240V
Product Wattage (W)	5
Equivalence with incandescent lamp(W)	40
Colour Render Index (Ra)	>Ra80
Colour Temperature (K)	4000
Materials	Aluminium + Acrylic
Protection Class	I
Dimmable	No
EEI	A to A++
Warm-up time up to 60 %of the full light output	Instant Full Light
Luminous Flux (lm)	150
Luminous Efficacy (lm/W)	30
Rated Life (hrs) ⌚	30.000
IP Rating	20
Power Factor	>0.5
Beam Angle	120°
Starting Time	<0.2s
Number of ON-OFF cycling	x15.000

Applications

- Styled bedroom, hallway, living room or dining area, all indoor applications.



Features

- High Lumen and CRI, Good quality & Constant Current driver.
- High heat dissipation, low carbon and environmental protection.
- SMD LED Lamp Base.
- Very low energy consumption.

