




Multi-functions Portable Power Station XO-PSA-200

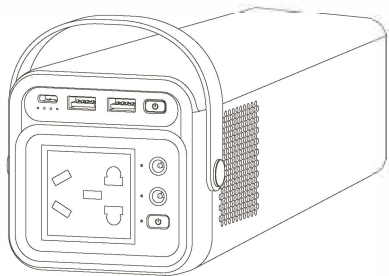

Thank you for purchasing and using this product!

To ensure the best usage experience of your phones and devices, please carefully read this manual and the manual of your phones. The first charging is very important for the battery performance. Please charge this product to full in the first charging.

Technical Specifications:

Item	Portable Power Station	
Model	XO-PSA-200	
AC Output	AC Output: 200V-240V-50Hz 200W	
Type-C Input	DC 5V=3A/9V=3A/12V=3A/15V=3A/20V=3.25A	
Type-C Output	DC 5V=3A/9V=3A/12V=3A/15V=3A/20V=3.25A	
USB-A1/A2 Output	DC 5V=2.4A/9V=2A/12V=1.5A	
DC Input	DC 12V-24V(60W)	
DC Output	DC 12V=5A	
Long Distance Lamp	1W	
Battery Power	190Wh (TYP)	
Battery Capacity	52.8Ah	
Dimensions	90x90x240mm (About)	
Weight	2000g (About)	
Standard	GB 31241-2014	
Total Output Power	Out-C/Out-A1/A2+DC Out	125W (Max)


Package List:

XO-PSA-200 Portable Power Station x1 Power Adapter x1
Manual x1

Different countries may have different requirements for accessories. Please take actual product as the standard. Final interpretation is owned by XO company.

Operation Instructions:

- Press the button and the display will show the remaining power with number. Long press the button to turn off the light, press again to enter SOS mode, and long press to turn off.
- When you need to use the AC output, please turn on the switch (-), connect the appliance to the socket and the appliance can work. When you need to stop the AC output, please turn off the switch (o) and disconnect the appliance.

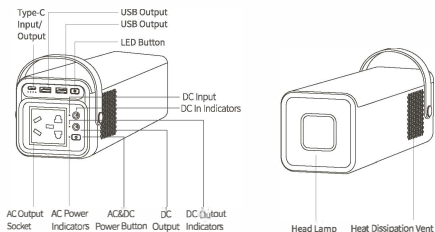

How to charge other devices with XO Power Station:

USB Output: Smart Phones, Smart Watches, Digital Cameras, E-Readers, Pads.
Type-C Output: Smart Phones, Laptops.
AC Output: Compatible with appliances which is 200V-240V-50Hz and input ≤150W.

AC Output

- Power for Mini-Fridge(40W) about 3.4 hours
- Power for 12W LED Light about 26 hours
- Power for 32 inches TV(60W) about 2.5 hours

USB Output

- Recharge Mac Book12 about twice
- Recharge Drones about 2.5 times

Charging Status:

Charging other devices:

- The screen is on and shows the battery level.
- The battery indicator light is off, the device is fully charged.

Notice: 1. The capacity PSA-200 is large, which takes 4.5 hours to fully charge with PD 65W fast charging, and it still subject to the actual situation. 2. If PSA-200 is not working during charging, please check the cable and make sure it is firmly connected or the correct charging connector is used. We recommend using XO or other reputable adapters to charge the power bank. 3. Power station has its own conversion rate, so capacity in the power station does not equal to the total power when it charges other devices. 4. The power station is compatible with most mobile phones, but it might not fit for some mobile phones, while not included in warranty and exchange conditions.

Safety Information:

Warning: Not following the safety usage may cause fire, electric shock, damage to devices and injury to users.

Please do not drop, hit or puncture PSA-200.

Please keep PSA-200 away from fire, high temperature environment and water.

Please don't touch the product with wet hand or wet cloth.

Please take off the appliance plug after usage.

If any swelling or abnormal phenomenon happens on PSA-200 or the devices being charged, please cut off the power immediately and stop using.

This device is not applicable to people who have physical or mental issues, children and those who are lack of the relevant knowledge and experience unless they are guided professionally. Children should be taken care of to make sure they don't use this device as a toy.

Warning

- AC Input prohibited!
- Do not disassemble, soak in water or leave in fire!

Warranty

Customer Name: _____ Phone Number: _____
Product Name: _____ Date of Purchase: _____
Address: _____
Remarks: _____

Executive Producer: Threekey Industrial(HK) Co., Ltd.
Manufacturer: Sanqi Youpin (Shenzhen) Co., Ltd.
Add: Hongdehui Industrial Park, Kang Qiao Road No.128, Buiji, Longgang District, Shenzhen Guangdong.
Standard: GB/T26572-2011 Tel: (+86) 0755-83512732

Warranty Terms:

- Warranty condition: We provide 6 months warranty for XO users from the date when the product is purchased. When applying for the warranty service, please show this warranty card and fill in the blank.
- Warranty scope: a. Quality problems appeared on normal use or damages caused by external force. b. In principle, we do not charge if products are under warranty period, but human damage will be charge accordingly. Products beyond warranty period will be repaired at customers' expense. c. We are not responsible for the inconvenience or loss caused by not being able to use the product during the repairing time.
- The following circumstances are not under warranty conditions: a. Artificial damages: improper use; product appearance worn abnormally; dropping; circuitry burned; squeeze; foreign matter enter into product; got damp; the seal label on the product has been changed or damaged; other obvious artificial damages. Other problems caused by customers such as dismantling the device, improper use and operation or products get wet. d. Damages caused by force majeure such as earthquake, flood, fire, hurricane and war.

Toxic materials and content:

Material Name	Toxic materials and content					
	Pb	Hg	Cd	Cr(VI)	PBB	PBDE
XO-PSA-200	O	O	O	O	O	O
O: means this toxic material meets the requirements in standard GB 31241-2014						
X: means this toxic material does not meet the requirements in standard GB 31241-2014						