

Axpert VM II Off-Grid Inverter

Operation without battery




- Pure sine wave solar inverter
- Output power factor 1
- High PV input voltage range
- Battery independent design
- Built-in 80A MPPT solar charger
- Battery equalization function to optimize battery performance and extend lifecycle
- Built-in anti-dusk kit for harsh environment

OFF-GRID INVERTER



Anti-Dust Kit

After installing this anti-dust kit, inverter will automatically detect this kit and activate internal thermal sensor to adjust internal temperature. By virtue of the dustproof design, it dramatically increases product reliability in harsh environment.


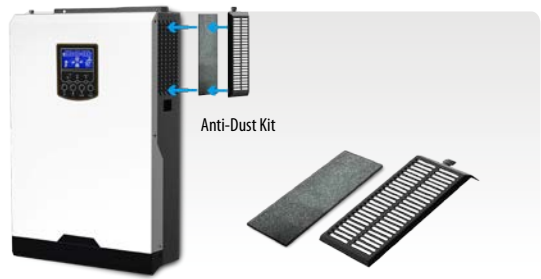


System Diagram:

Operation with battery connected

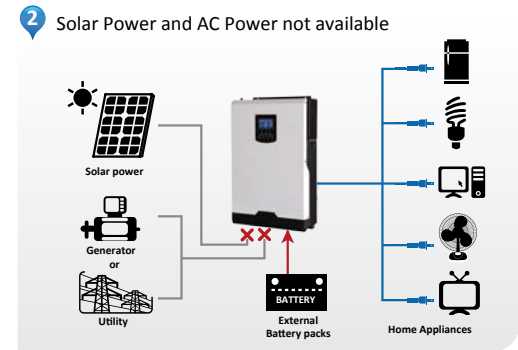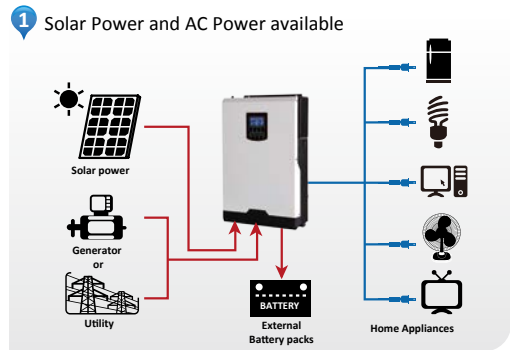

Operation without battery connected

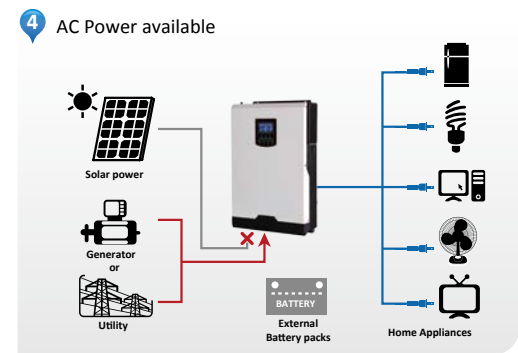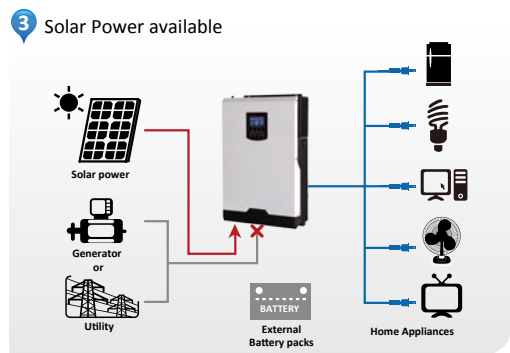

Axpert VM II Off-Grid Inverter Selection Guide

MODEL	Axpert VM II 3000-24	Axpert VM II 5000-48
Rated Power	3000VA / 3000W	5000VA / 5000W
INPUT		
Voltage	230 VAC	
Selectable Voltage Range	170-280 VAC (For Personal Computers) ; 90-280 VAC (For Home Appliances)	
Frequency Range	50 Hz/60 Hz (Auto sensing)	
OUTPUT		
AC Voltage Regulation (Batt. Mode)	230VAC \pm 5%	
Surge Power	6000VA	10000VA
Efficiency (Peak)	90% ~ 93%	
Transfer Time	10 ms (For Personal Computers) ; 20 ms (For Home Appliances)	
Waveform	Pure sine wave	
BATTERY		
Battery Voltage	24 VDC	48 VDC
Floating Charge Voltage	27 VDC	54 VDC
Overcharge Protection	33 VDC	63 VDC
SOLAR CHARGER & AC CHARGER		
Maximum PV Array Open Circuit Voltage	500 VDC	500 VDC
Maximum PV Array Power	4000 W	5000 W
MPP Range @ Operating Voltage	120~450 VDC	120~450 VDC
Maximum Solar Charge Current	80 A	80 A
Maximum AC Charge Current	60 A	60 A
Maximum Charge Current	80 A	80 A
PHYSICAL		
Dimension, D x W x H (mm)	100 x 300 x 440	
Net Weight (kgs)	9	10
Communication Interface	USB/RS232	
ENVIRONMENT		
Humidity	5% to 95% Relative Humidity (Non-condensing)	
Operating Temperature	-10°C to 50°C	
Storage Temperature	-15°C to 60°C	

Product specifications are subject to change without further notice.