

## 3.1.9.5 ADAPTERS




Fig. I

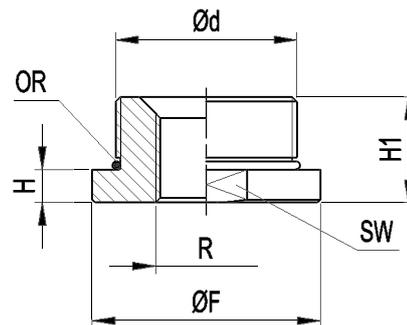


Fig. II

3.1fc

| Accumulator type       | Order code         | Ød<br>Acc. connection | R****<br>Out connections (0 = blind) | Fig. | SW<br>mm | Ø F<br>mm | H<br>mm | H1<br>mm | OR<br>(Included) | Weight<br>Kg |
|------------------------|--------------------|-----------------------|--------------------------------------|------|----------|-----------|---------|----------|------------------|--------------|
| AS / ASP 0,7 - 1 - 1,5 | R - A5*** - ** / * | 3/4" BSP              | 1/8" ÷ 3/8" BSP - NPT - BSPT         | I    | 32       | -         | 11      | 28       | 0010R2093 - *    | 0,14         |
|                        |                    |                       | 1/2" BSP - NPT - BSPT                | I    |          |           | 28      | 45       |                  | 0,27         |
| AS / ASP 3 - 5         | R - A7*** - ** / * | 1" 1/4 BSP            | 1/8" ÷ 1" BSP - NPT - BSPT           | II   | 48       | 53        | 11      | 32       | 0010R3150 - *    | 0,41         |
| AS / ASP 10 ÷ 55       | R - A9*** - ** / * | 2" BSP                | 1/8" ÷ 1" 1/2 BSP - NPT - BSPT       | II   | 70       | 75        | 11      | 35       | 0010R3218 - *    | 0,86         |

\* Gasket material

\*\* Adapter material

\*\*\* See chapter 3.1.8 table 7 - 8

Weigth indicated only for blind version

3.1fd

\*\*\*\* R Out connections type "S" and "M" thread on request