

## Display Setting

The LCD display information will be switched in turns by pressing "UP" or "DOWN" key. The selectable information is switched as below order: battery voltage, battery current, inverter voltage, inverter current, grid voltage, grid current, load in Watt, load in VA, grid frequency, inverter frequency, PV voltage, PV charging power, PV charging output voltage, PV charging current.

| Selectable information                          | LCD display                             |  |
|---|---|--|
| Battery voltage/DC discharging current          | <sup>BATT</sup><br>260 <sup>V</sup>     | 480 <sup>A</sup>                       |
| Inverter output voltage/Inverter output current | 229 <sup>V</sup>                        | <sup>INV</sup><br>130 <sup>A</sup>     |
| Grid voltage/Grid current                       | 229 <sup>V</sup>                        | <sup>GRID</sup><br>80 <sup>A</sup>     |
| Load in Watt/VA                                 | 100 <sup>KW</sup>                       | <sup>LOAD</sup><br>120 <sup>KVA</sup>  |
| Grid frequency/Inverter frequency               | <sup>INPUT</sup><br>500 <sup>Hz</sup>   | <sup>INV</sup><br>500 <sup>Hz</sup>    |
| PV voltage and PV charging current              | <sup>INPUT PV</sup><br>360 <sup>V</sup> | 806 <sup>A</sup>                       |
| PV charger output voltage and PV power          | <sup>PV</sup><br>430 <sup>V</sup>       | <sup>OUTPUT</sup><br>320 <sup>KW</sup> |

## SPECIFICATIONS

Table 1 Line Mode Specifications

| INVERTER MODEL             | 3.5KW DC24V  | 5.5KW DC48V |
|----------------------------|--|-------------|
| Input Voltage Waveform     | Sinusoidal (utility or generator)                    |             |
| Nominal Input Voltage      | 230Vac   |             |
| Low Loss Voltage           | 90Vac±7V(APL,GEN);170Vac±7V(UPS);<br>186Vac±7V(VDE)  |             |
| Low Loss Return Voltage    | 100Vac±7V(APL,GEN);180Vac±7V(UPS);<br>196Vac±7V(VDE) |             |
| High Loss Voltage          | 280Vac±7V(UPS,APL,GEN);<br>253Vac±7V(VDE)            |             |
| High Loss Return Voltage   | 270Vac±7V(UPS,APL,GEN);<br>250Vac±7V(VDE)            |             |
| Max AC Input Voltage       | 300Vac   |             |
| Nominal Input Frequency    | 50HZ/60HZ(Auto detection)                            |             |
| Low Loss Frequency         | 40HZ±1HZ(UPS,APL,GEN);<br>47.5HZ±0.05HZ(VDE)         |             |
| Low Loss Return Frequency  | 42HZ±1HZ(UPS,APL,GEN);<br>47.5HZ±0.05HZ(VDE)         |             |
| High Loss Frequency        | 65HZ±1HZ(UPS,APL,GEN);<br>51.5HZ±0.05HZ(VDE)         |             |
| High Loss Return Frequency | 63HZ±1HZ(APL,GEN,UPS);<br>50.05HZ±0.05HZ(VDE)        |             |

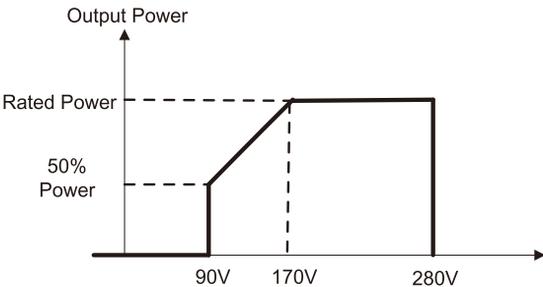
|   |  |
|---|--|
| Output Short Circuit Protection   | Line mode: Circuit Breaker<br>Battery mode: Electronic Circuits                                    |
| Efficiency (Line Mode)  | >95%(Rated R load, battery full charged)   |
| Transfer Time   | 10ms typical (UPS,VDE)<br>20ms typical (APL)<br>< 50ms(For parallel operation)                     |
| Output power derating:<br>When AC input voltage drops to 95V or 170V depending on models, the output power will be derated. | 230Vac model:<br> |

Table 2 Inverter Mode Specifications

| INVERTER MODEL                | 3.5KW DC24V                       | 5.5KW DC48V |
|-------------------------------|-----------------------------------|-------------|
| Rated Output Power            | 3500W                             | 5500W       |
| Output Voltage Waveform       | Pure Sine Wave                    |             |
| Output Voltage Regulation     | 230Vac±5%                         |             |
| Output Frequency              | 60Hz or 50Hz                      |             |
| Peak Efficiency               | 90%                               |             |
| Overload Protection           | 5s@≥150% load; 10s@110%~150% load |             |
| Nominal DC Input Voltage      | 24Vdc                             | 48Vdc       |
| Cold Start Voltage            | 23.0Vdc                           | 46.0Vdc     |
| Low DC Warning Voltage        |                                   |             |
| @ load < 20%                  | 22.0Vdc                           | 44.0Vdc     |
| @ 20% ≤ load < 50%            | 21.4Vdc                           | 42.8Vdc     |
| @ load ≥ 50%                  | 20.2Vdc                           | 40.4Vdc     |
| Low DC Warning Return Voltage |                                   |             |
| @ load < 20%                  | 23.0Vdc                           | 46.0Vdc     |
| @ 20% ≤ load < 50%            | 22.4Vdc                           | 44.8Vdc     |
| @ load ≥ 50%                  | 21.2Vdc                           | 42.4Vdc     |

|  |         |         |
|--|---------|---------|
| Low DC Cut-off Voltage<br>@ load < 20% | 21.0Vdc | 42.0Vdc |
| @ 20% ≤ load < 50%                     | 20.4Vdc | 40.8Vdc |
| @ load ≥ 50%                           | 19.2Vdc | 38.4Vdc |
| High DC Recovery Voltage               | 29Vdc   | 58Vdc   |
| High DC Cut-off Voltage                | 30Vdc   | 60Vdc   |

Table 3 Charge Mode Specifications

|  |                        |  |                     |
|--|------------------------|--|---------------------|
| Utility Charging Mode                    |                        |  |                     |
| INVERTER MODEL                           |                        | 3.5KW DC24V  | 5.5KW DC48V         |
| Charging Current @ Nominal Input Voltage |                        | 80A <sub>MAX</sub>   | 100A <sub>MAX</sub> |
| Floating charging voltage                | AGM / Gel/LEAD Battery | 27.4Vdc  | 54.8Vdc             |
|  | Flooded battery        | 27.4Vdc  | 54.8Vdc             |
| Bulk charging voltage (C.V voltage)      | AGM / Gel/LEAD Battery | 28.8Vdc  | 57.6Vdc             |
|  | Flooded battery        | 28.4Vdc  | 56.8Vdc             |
| Charging Algorithm                       |                        | 3-Step(Flooded Battery, AGM/Gel/LEAD Battery),<br>4-Step(LI) |                     |
| Solar Charging Mode                      |                        |  |                     |
| INVERTER MODEL                           |                        | 3.5KW DC24V  | 5.5KW DC48V         |
| Rated Power                              |                        | 4000W  | 6000W               |
| MPPT charger                             |                        |  |                     |
| solar charging current                   |                        | 100A <sub>max</sub>  | 120A <sub>max</sub> |
| Max.PV Array Open Circuit Voltage        |                        | 450Vdc max   |                     |
| PV Array MPPT Voltage Range              |                        | 150~430Vdc   |                     |
| Min battery voltage for PV charge        |                        | 17Vdc  | 34Vdc               |
| Battery Voltage Accuracy                 |                        | +/-0.3%  |                     |
| PV Voltage Accuracy                      |                        | +/-2V  |                     |
| Charging Algorithm                       |                        | 3-Step(Flooded Battery, AGM/Gel/LEAD Battery),<br>4-Step(LI) |                     |

|  |             |             |
|--|-------------|-------------|
| Charging algorithm for lead acid battery |             |             |
| Charging algorithm for Lithium battery   |             |             |
| Joint Utility and Solar Charging         |             |             |
| INVERTER MODEL                           | 3.5KW DC24V | 5.5KW DC48V |
| Max Charging Current                     | 100A        | 120A        |
| Default Charging Current                 | 80A         |             |

Table 4 General Specifications

|                             |                 |                 |
|-----------------------------|-----------------|-----------------|
| INVERTER MODEL              | 3.5KW DC24V     | 5.5KW DC48V     |
| Safety Certification        | CE              |                 |
| Operating Temperature Range | -10°C to 50°C   |                 |
| Storage temperature         | -15°C~ 60°C     |                 |
| Dimension (D*W*H), mm       | 322 x 486 x 134 | 309 x 505 x 147 |
| Net Weight, kg              | 8               | 14.4            |