

# Blue Carbon



#### Clean energy

Using sunlight to achieve clean energy charging can supply power to household appliances.



#### Storing energy

Realize the freedom of electricity consumption in the area where there is no electricity and less electricity.



#### Household appliances

Free electricity

## Smart BMS

**48V/100Ah**

5.12kWh

Name: LITHIUM ION BATTERIES

Model: SMART-BCT-V-48-100

## Application Places

For no city power areas, the battery pack can be charged by solar panels and used for night lighting; For the areas that city power is expensive, the battery pack can be charged during the electricity valley value period, and used at the peak power period; For the areas which power off from time to time, the battery pack can be used as UPS, to avoid information loss caused by sudden power outage. The battery pack is applicable to commercial lighting, industrial lighting, home lighting, outdoor lighting, camping tourism, farming, planting, the night market stalls, etc.




Website: [www.bluecarbontech.com](http://www.bluecarbontech.com)  
Telephone: 400-061-7071

NO.C1 Technology Innovation Center, High-Tech  
Zone, Rizhao, Shandong Province, China

Blue Carbon, no need electricity bill at all.


# Blue Carbon

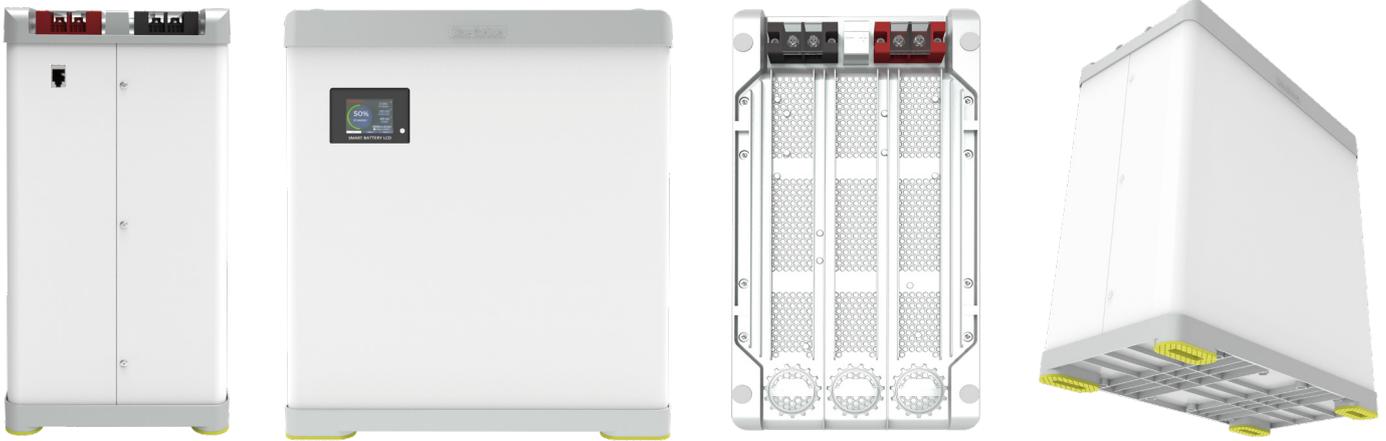

Multi-Angle Display

## BCT


## INSTRUCTIONS

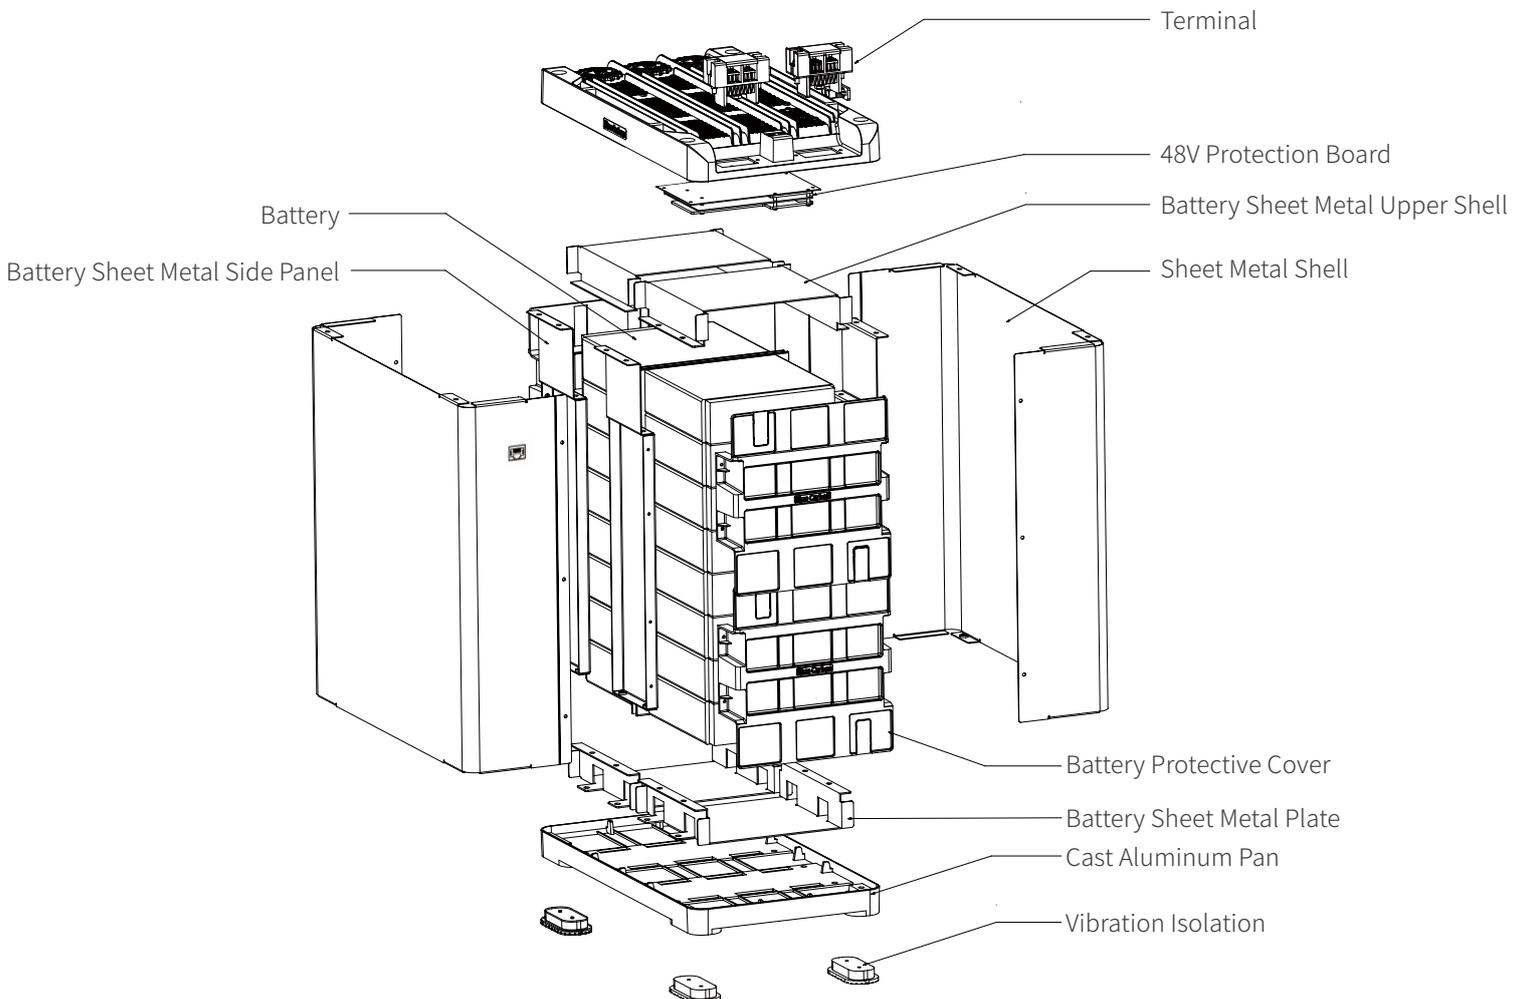

# Blue Carbon


## BCT

## INSTRUCTIONS

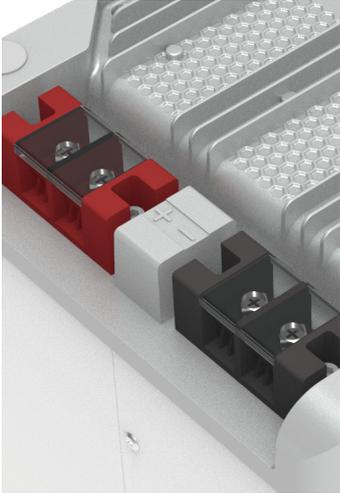


### Binding Post

Insulated flame retardant, fast and efficient.

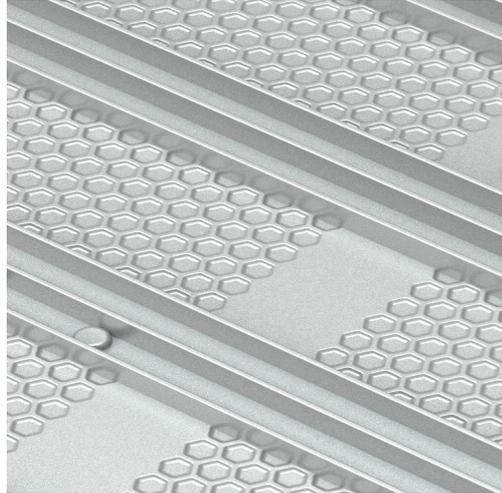


### High Quality Aluminium Magnesium Alloy

Anti-corrosion, substantial, durable, artistic, practical.

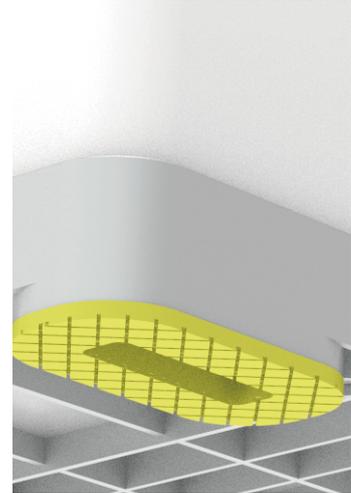

### Insulated Rubber Pad

Shockproof drag reduction, beautiful and generous.

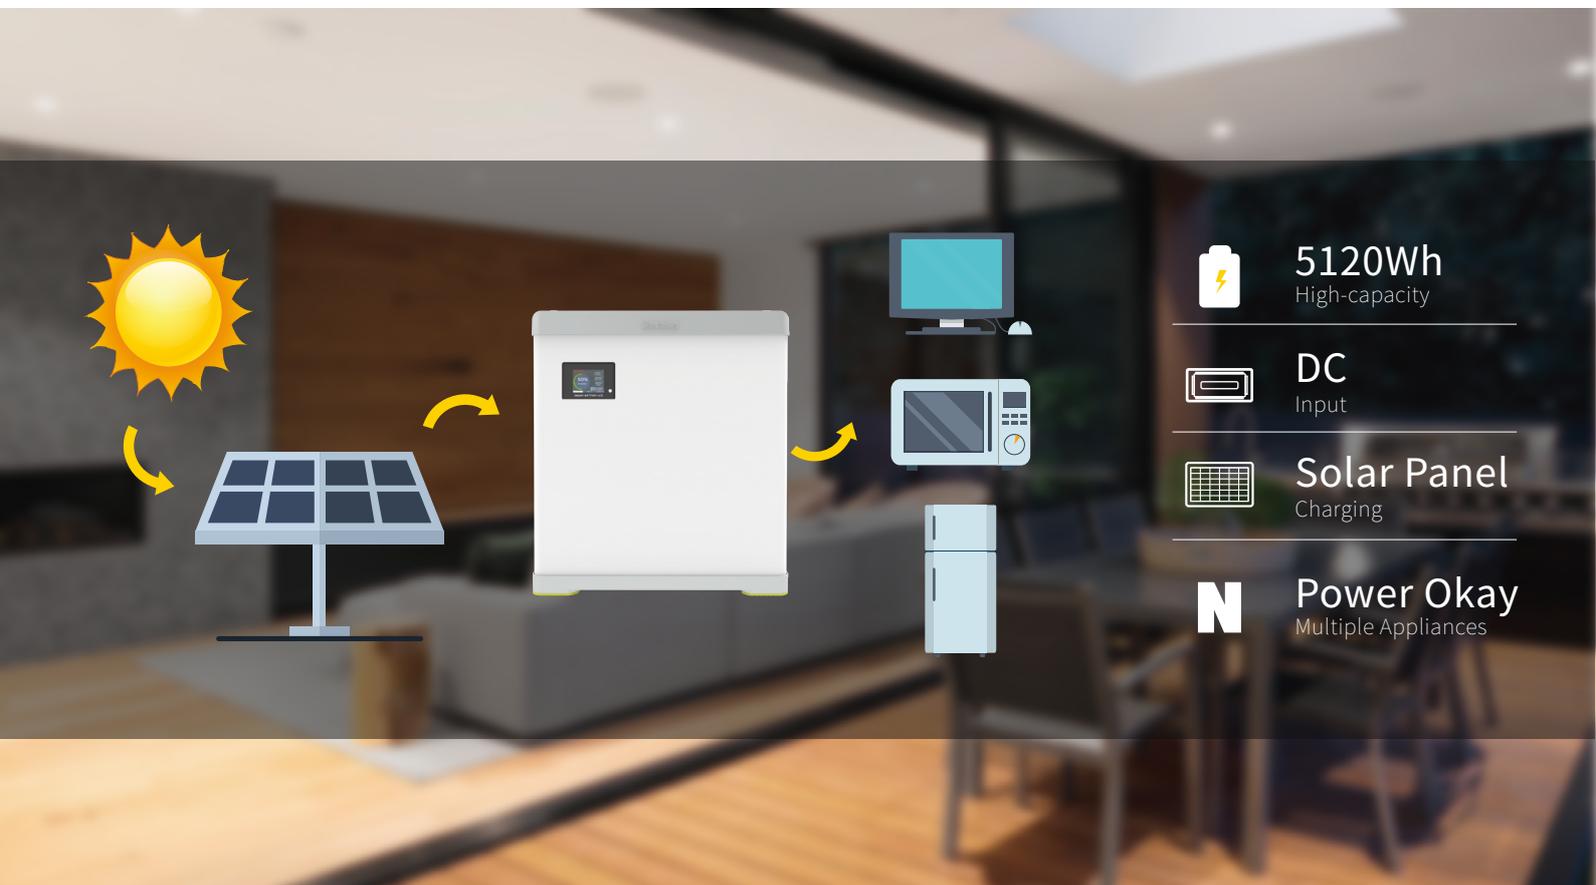

Website: [www.bluecarbontech.com](http://www.bluecarbontech.com)  
Telephone: 400-061-7071

NO.C1 Technology Innovation Center, High-Tech Zone, Rizhao, Shandong Province, China

Blue Carbon, no need electricity bill at all.

### SMART BATTERY MANAGEMENT SYSTEM



Over-Charge Protection



Over-Discharge Protection



Over-Current Protection



High Quality Chip



Short Circuit Protection



Temperature Protection

### Product Details

#### LiFePO4 battery

Stable discharge, long cycle life, safe and environmental protection, high safety performance.



#### Smart BMS (RS485)

Protect the battery, Prevent battery damage, Extend battery life.



Imported components



Comply with CE standard safety certification



Separate driver modules



Use insulation materials

#### LCD display

Observe the power usage at any time.




Function Introduction



## BCT

## TECHNICAL PARAMETERS

<b>Model</b>	SMART-BCT-V-48-100		<b>Cell Type</b>	LiFePO4 Battery/LFP	
<b>Basic Specifications</b>	Nominal Capacity	100Ah	<b>Battery</b>	Storage Temperature Range	Short-Term -20°C-40°C(Within 1 Month) Long-Term 10°C-35°C(Within 1 Year)
	Nominal Voltage	48V(51.2V)		Operating Temperature Range	-15°C-60°C
	Electricity(kWh)	5.12kWh		Recommended Temperature Range	10°C-40°C
<b>Input</b>	Full Charge Voltage	57.6V-60V		Storage Humidity	≤75% RH
	Input Voltage Range	60V-150V		Atmospheric Pressure	Below 5000 Above Sea Level
	Maximum Solar Panel Input Current	80A		Self-Discharge ( 25°)	<3%/Month
	Rshoot Delay Protection	1000ms		Depth Of Discharge	>80%
<b>Output</b>	Continuously Use Output Current	100A		C-Rate Discharge	<0.8C
	Discharge Cut-Off Voltage	40V-46V		Cycle Life	> 6000 Times (< 0.5C)
	Over-Discharge Delay Protection	1000ms		<b>Other</b>	Certification Standards
	Short Circuit Protection Delay	300us	Warranty		5 Years
	Short Circuit Protection Recovery	Disconnect Load	Product Size		461±2×250±2×521±2mm
	Instant Start Current	300A	Packing Size		550±2×333±2×601±2mm
	Instant Start Current Time	10S	Communication		RS485

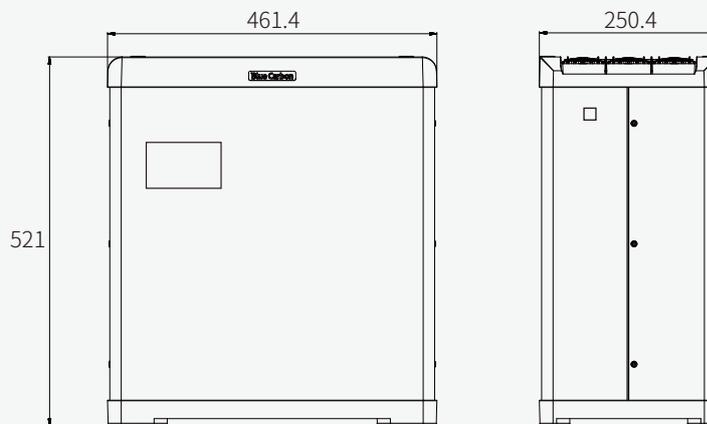


Product size: (mm)



# Blue Carbon

## Advantages

- High quality aluminium magnesium alloy, anti-corrosion, substantial, durable, artistic, practical.
- All in one mould design and production, easy to install.
- With longer span life LiFePO4 battery, over 12 years lifespan, ensure the whole set products' life span.
- Dustproof structure design, DC output, safe and reliable.
- Integrated packaging, safe and convenient to transport.

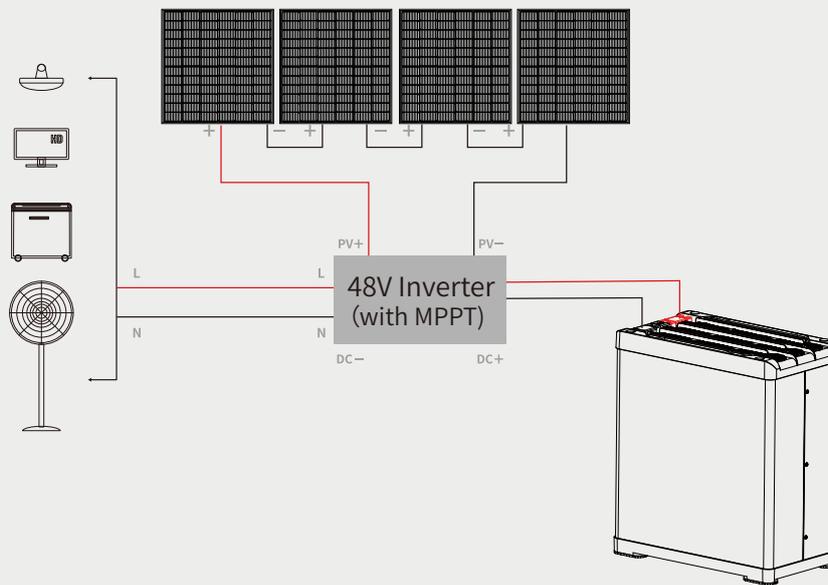


## BCT

## INSTRUCTIONS

### Attention:


1. It is forbidden to use any high-voltage to charge it. The open circuit voltage of 12V battery pack can not exceed 22V, 24V battery pack can not exceed 44V and 48V battery pack can not exceed 88V. The maximum open circuit voltage of solar panel can not exceed twice of the voltage of battery.
2. When the source voltage of the charging terminal is higher than 88V, in order to prevent the failure of the voltage conversion device in the middle and cause overcharging of the battery. The high-voltage circuit breaker with charging protection function must be connected between the charging controller and the battery.
3. 12V battery pack, maximum support 4 battery packs in series, the highest charging voltage of 4 battery packs in series is less than 88V, and the highest charging voltage of 2 battery packs in series is less than 44V. 24V battery pack, maximum support 2 battery packs in series, the highest charging voltage of 2 battery packs in series is less than 88V. 48V battery pack, it is forbidden to use in series. Ensure the batteries are discharged to empty condition or fully charged before connecting them in parallel.
4. It is forbidden to connect the positive and negative poles reversely and short circuit the positive and negative poles of the battery pack; The overload is strictly prohibited.
5. The battery pack should not be used in severe vibration scenarios.
6. It is strictly prohibited to put in water and clean the battery pack, and do not place the product in the outdoor exposed place for a long time to prevent rain or moisture.
7. It is forbidden to use or place the battery at high temperature. If battery is used for a long time, the recommended optimal ambient temperature is 10-40°C.
8. The battery should not be placed in the room where any combustible gas or flammable items are stored, and should be used in a clean, dry and ventilated environment.
9. It is strictly prohibited to knock, throw, reverse or trample on the battery pack. It is strictly prohibited to use the battery pack when the appearance is seriously damage (artificial knocking, scraping, falling from height, unauthorized disassembly of the products, etc.).
10. It is strictly forbidden to dump or invert the product.

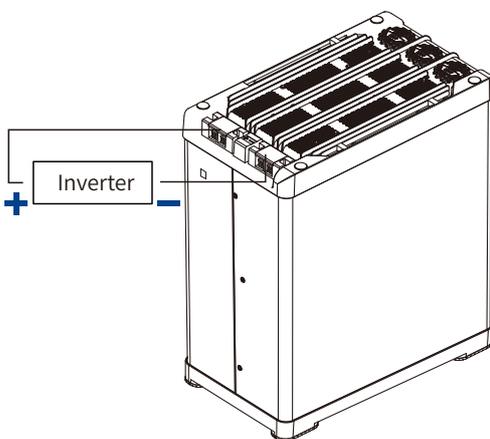


Please strictly following the above operating rules when using the battery pack.




Different Rate Discharge Curve (25°C)

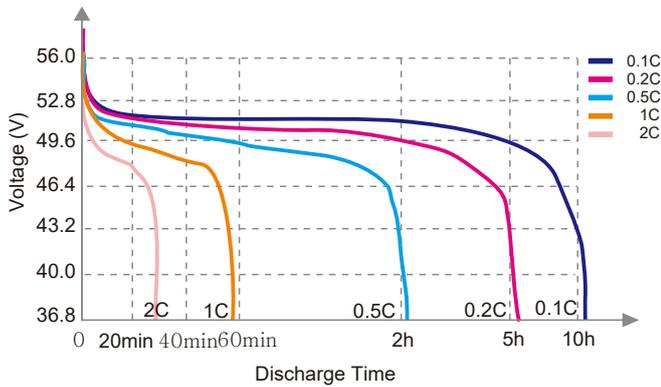


Different Temperature Discharge Curve (0.5C)

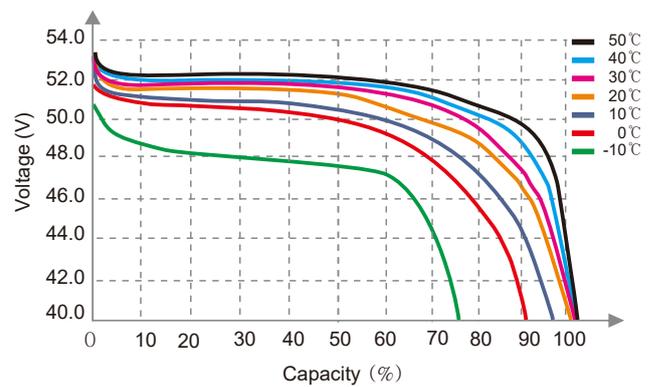


State of Charge Curve (0.5C, 25°C)

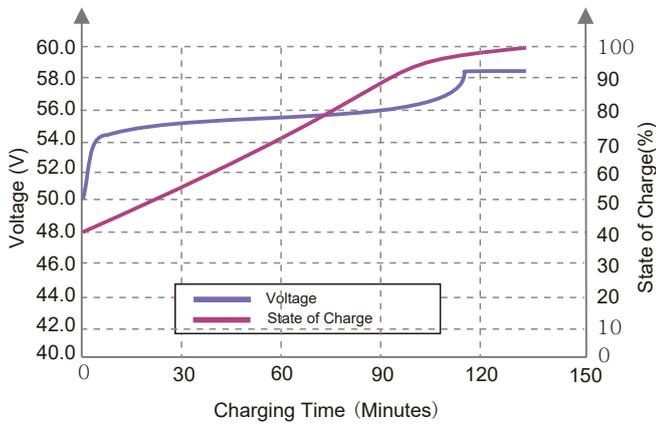


Charging Characteristics (0.5C, 25°C)

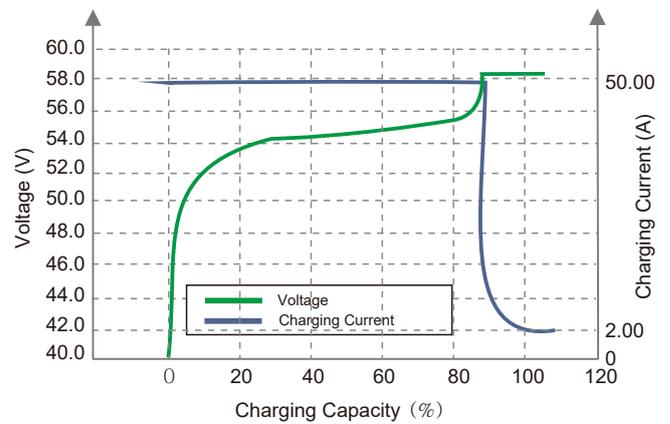

Different DOD Discharge Cycle Life Curve(1C)

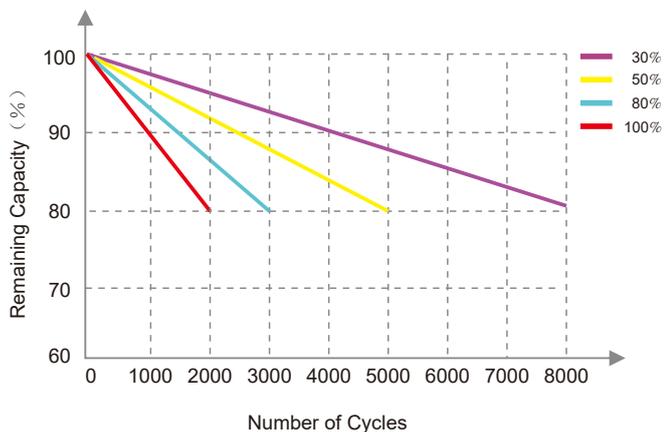

Different Temperature Self Discharge Curve

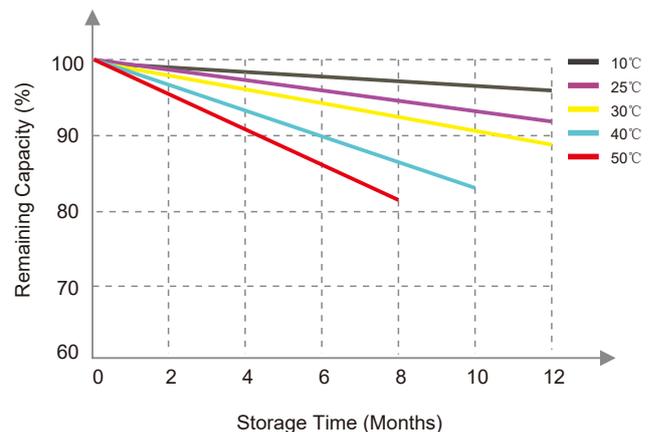

## The Advantages and Characteristics of LiFePO<sub>4</sub> Battery

- Volume: The capacity of LiFePO<sub>4</sub> battery is bigger than lead-acid cell, with the same volume, it is double of Lead-acid battery.
- Weight: LiFePO<sub>4</sub> is light. The weight is just 1/3 of lead-acid cell with the same capacity.
- Discharge rate: LiFePO<sub>4</sub> battery can discharge with maximum current, it is used in electric vehicles and electric bicycles.
- No memory effect: No matter the LiFePO<sub>4</sub> Battery is in which conditions, it can be charged and discharged whenever you like, no need to discharge totally then charge for it.
- Durability: The durability of LiFePO<sub>4</sub> Battery is powerful and consumption is slow. The time of charging and discharging is more than 2000times. After 2000times circulation, the capacity of the battery is still more than 80%.
- Security: LiFePO<sub>4</sub> battery passed the strict safety testing, with higher safety performance.
- Environmental protection: Lithium materials not have any poisonous and harmful substance. It is regarded as green and environmental protection battery. The battery has no any pollution no matter in the process of production or in the process of using.
- Well graded and combination. After multi-selection, to ensure each cell qualified with long life;
- The connection tech of all interface, be safe and durable, with simple maintenance.
- Multi-layer protection structure, shockproof, anti explosion and fire.
- Safe and durable for long run.
- Security and reliability, compared with lead-acid battery, the materials of LiFe PO<sub>4</sub> is the securest, the best choice of solar energy storage battery.

## Storage and Transportation

- Based on the character of cell, proper environment for transportation of LiFePO<sub>4</sub> battery pack need to be created to protect the battery.
- Battery should be kept in warehouse where it's dry, clean and well-ventilated.
- During loading of battery, attention must be paid against dropping, turning over and serious stacking.



# Blue Carbon

## Notices

- Never use or keep the battery under the high temperature. Otherwise it will cause battery heat, get into fire or lose some function and reduce the life.
- Never throw the battery into fire or heating machine to avoid fire, explosion and environment pollution; scrap battery should be returned to the supplier and handled by the recycle station.
- Never use the battery under strong static and strong magnetic field, otherwise it will destroy the protecting device.
- If battery leaked, the electrolyte get into eyes, please don't knead, please wash eyes by water and send to hospital. Otherwise it will hurt eyes.
- If battery emit peculiar smell, heating, distortion or appear any unconventionality during using, storage or charging process, please take it out from device or charge and stop using.
- Never cut the battery in socket directly; please use the stated charger when charging.
- Check the voltage of battery and relevant connectors before using the battery. It can't be used until everything turns out to be normal.
- Prior to charging, fully check the insulativity, physical condition and ageing status, since breakage and ageing are never allowed.
- The battery should be stored in half SOC. It needs to be charged once if out of use for as long as half a year.
- Clean the dirty electrode, if any, with a clean dry cloth, or poor contact or operation failure may occur.

## Warning

- Never knock, throw or trample the battery.
- Never upside down the positive and negative.
- Never connect the positive and negative of battery with metal.
- Never ship or store the battery together with metal.
- Never cut through the battery with nail or other edge tool.
- Never throw the battery into water, please keep it under dry, shady and cool circumstance when not use.



# Blue Carbon

## BCT

## APPLICATION SCENARIOS AND CASES



Website: [www.bluecarbontech.com](http://www.bluecarbontech.com)  
Telephone: 400-061-7071

NO.C1 Technology Innovation Center, High-Tech  
Zone, Rizhao, Shandong Province, China

Blue Carbon, no need electricity bill at all.