


PRODUCT SPECIFICATION

Input voltage	14.6V to 28V
Extra features	Smart audio 5000mW
Power supply	5V Camera @ under 500mA max.
Output power	25/200/500/1000/3000/5000mW
Microphone	Not supported
Antenna connector	MMCX
Cable connector	JST, 6pin
Dimensions	36 (W)x36 (D) mm. 30.5 x 30.5mm (hole)
Weight	25g (excluding antenna)
Kit contents	1x VTX, 1x cable, 1x pigtail



**Ultra Long Range
All Channels Version**

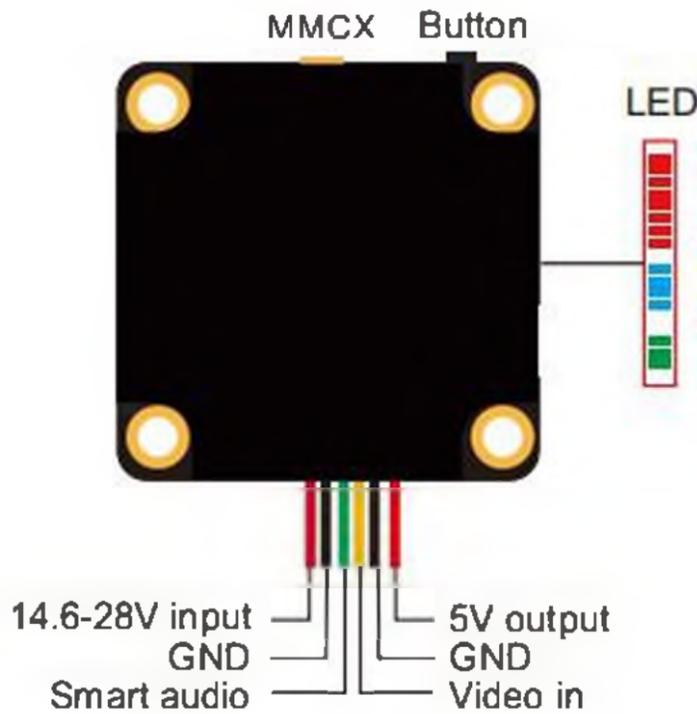

TX5000AC
V2

PRODUCT SPECIFICATION

Key features

- Support Smart audio
- 25/200/500/1000/3000/5000mW power switchable
- Built-in cooling fan
- OSD configuration using smart audio
- 14.6-28V input with 5V output

Button control Channel select mode

Channel Select

8 Red leds stands for 8 channels.

Band Select

4 Blue leds stands for 12 bands

A	b	E	F	r	P
●	○	●	○	●	○
○	●	○	○	○	○
○	○	○	○	○	○
L	U	O	H	T	n
●	○	○	○	○	○
○	○	○	○	○	○
○	○	○	○	○	○

Power Select

3 Green leds stands for 6 power levels

25mW	200mW	500mW	1000mW	3000mW	5000mW
○	○	○	○	○	○
○	○	○	○	○	○
○	○	○	○	○	○

PRODUCT SPECIFICATION

Slow power on

The VTX will wait for 5 seconds before turning on power amplifier. The 5 seconds slow power on will protect the VTX from being burned by maximum instantaneous power.

Pit Mode

The VTX is fully accessible via smart audio. It supports Pit Mode.

Band	CH1	CH2	CH3	CH4	CH5	CH6	CH7	CH8
Band A	5474	5492	5510	5528	5546	5564	5582	5600
Band b	5362	5399	5436	5473	5510	5547	5584	5621
Band E	5325	5348	5366	5384	5402	5420	5438	5456
Band F	5129	5159	5189	5219	5249	5279	5309	5339
Band r	4990	5020	5050	5080	5110	5140	5170	5200
Band P	5333	5373	5413	5453	5493	5533	5573	5613
Band L	4900	4940	4921	4958	4995	5032	5069	5099
Band U	5960	5980	6000	6020	6030	6040	6050	6060
Band O	5865	5845	5825	5805	5785	5765	5745	5725
Band H	5733	5752	5771	5790	5809	5828	5847	5866
Band T	5705	5685	5665	5645	5885	5905	5925	5945
Band n	5740	5760	5780	5800	5820	5840	5860	5880

HOT CAUTION
BE CAREFUL NOT TO BURN YOUR FINGERS

PLUG THE ANTENNA BEFORE POWERING THE VTX
DO NOT REMOVE COOLING FAN