

# LED DOWNLIGHT




Product&amp;Family Code: 016 020 0020

**GALINA-20**

## Technical Data

Voltage (V)	220-240V
Product Wattage (W)	30
Equivalence with incandescent lamp	240
Colour Render Index (Ra)	>Ra80
Colour Temperature (K)	6500K
Materials	Aluminium Die Casting Body
Protection Class	II
Dimmable	No
EEL	A to A++
Warm-up time up to 60 %of the full light output	Instant Full Light
Luminous Flux (lm)	1166
Luminous Efficacy (lm/W)	58
Rated Life (hrs) ☉	40.000
IP Rating	20
Power Factor	>0.9
Beam Angle	90°
Starting Time	<0.2s
Number of ON-OFF cycling	x25.000

## Technical Drawing

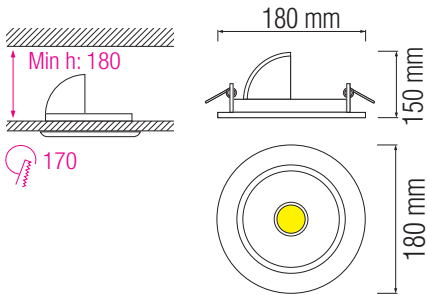


## Applications

Airport, Bathroom, Bedroom, Car Park, Cinema, Gallery, Hospital, Hotel, Kitchen, Museum etc.



## Photometric Diagram

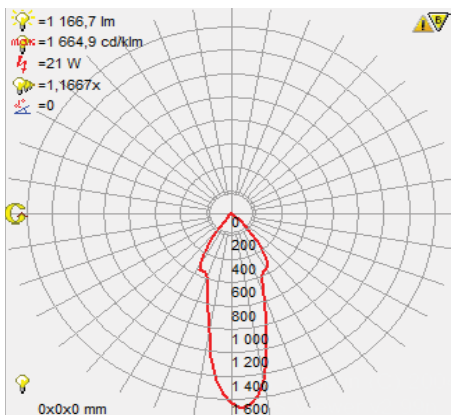

## Features

- High Lumen and CRI, Good quality & Constant Current driver.
- High heat dissipation, low carbon and environmental protection.
- Innovative design of assembly structure.
- Extremely Long Life.

