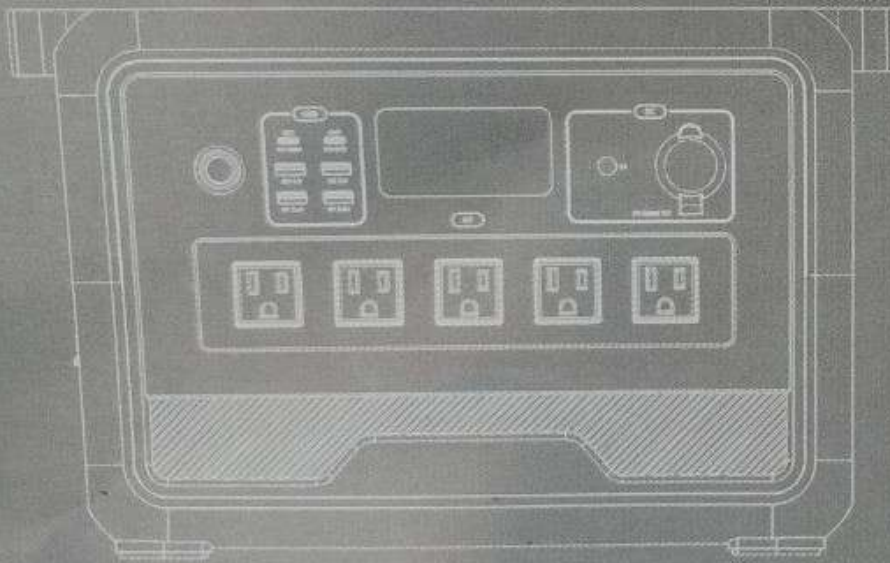


User Manual

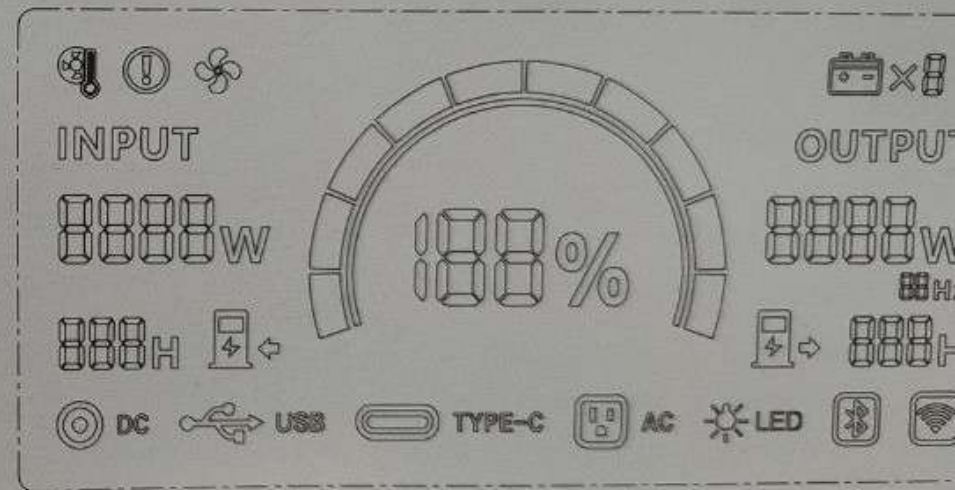
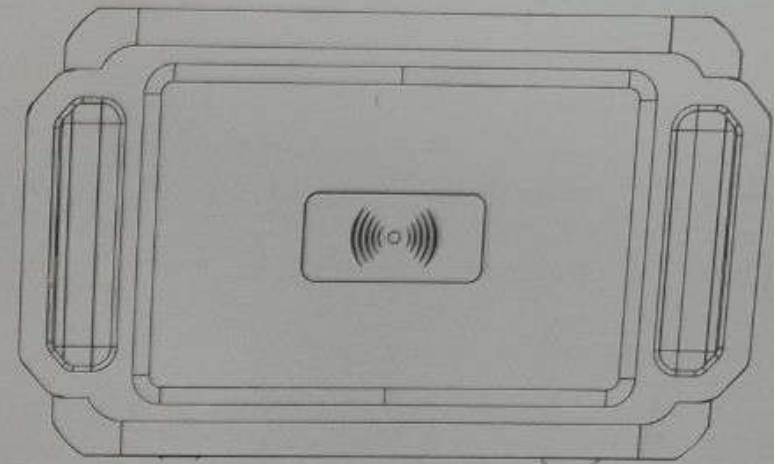
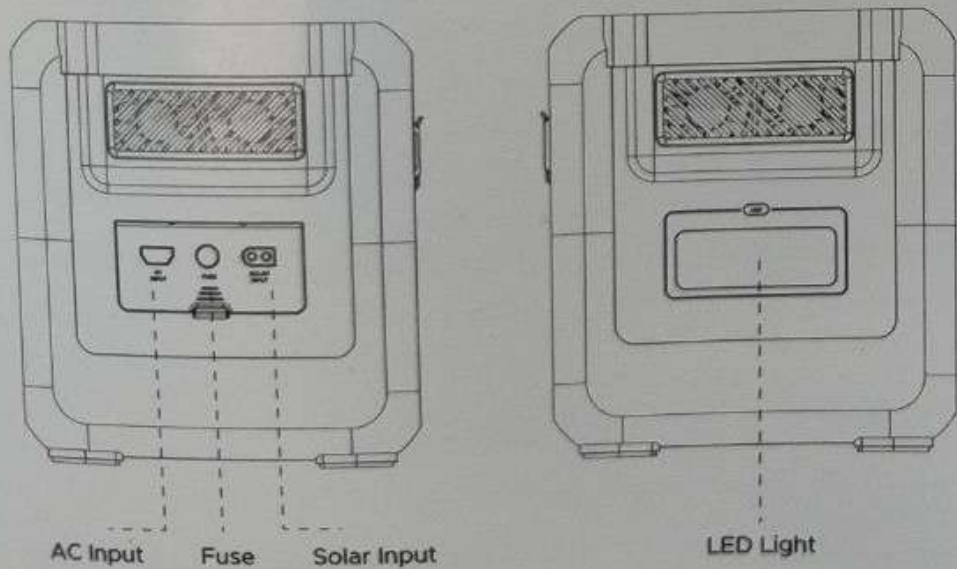
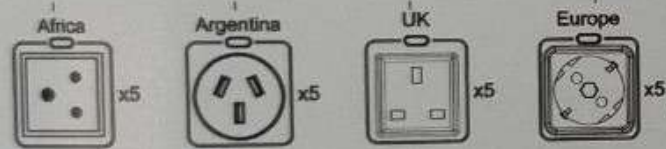
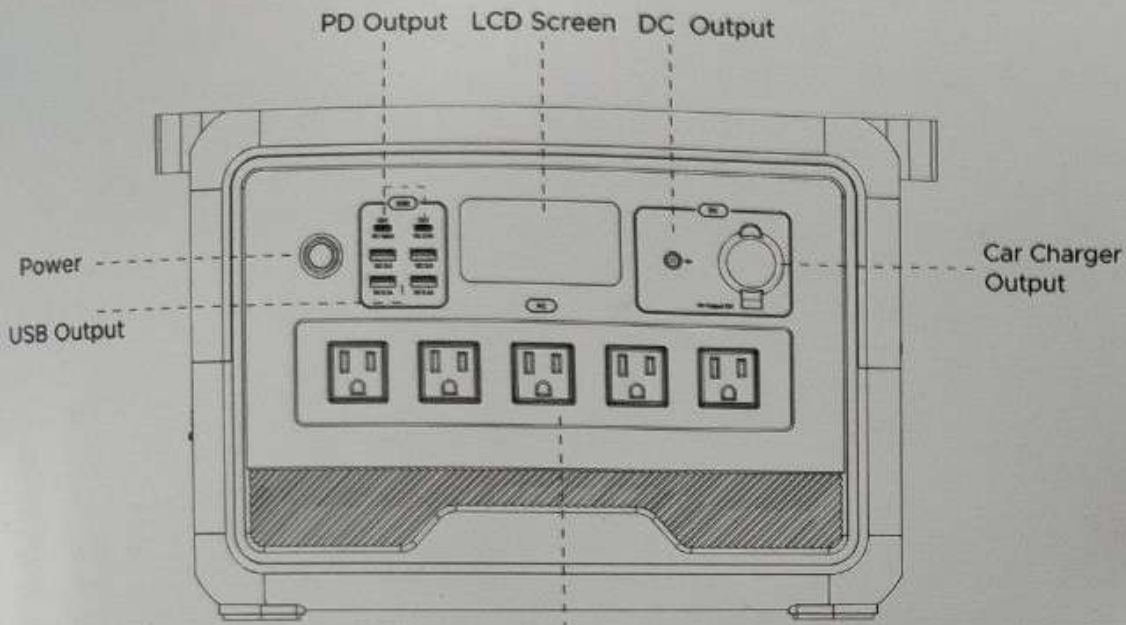


Portable power station 1200W

Important Information



Please read the user manual carefully when you use this product. You should follow all the instructions.


1. When children are using the product, please make sure they have close supervision to reduce the risks.
2. It will increase the risk of electric shock if you use non-recommended products or accessories.
3. Please make sure to use the product in a ventilated environment.
4. Please keep the product in a dry and ventilated place to avoid moisture and electric shock.
5. Please remove the power plug when the product is not in use.
6. Do not expose the product to fire or excessive temperatures. It will explode if the temperature is over 130°.
7. Do not disassemble the product. It may cause fire, explosion, injury, and unpredictable risks.
8. Do not use the product with damaged wires or plugs, or damaged output cables. It may cause an electric shock.



LCD Screen

LCD Screen will display charge and discharge. When you use the product, it will display the remaining power.

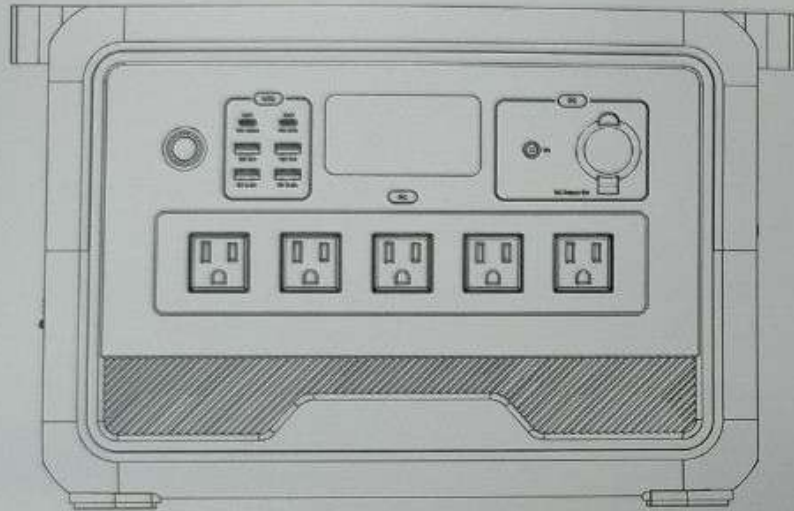-  Press button to turn on and press button one more time to turn off.
-  The current power of the product. It is displayed as a percentage (%).



Charging method

Before using or storing the product, please use the AC charging charge, the LCD screen will display the current charge, when the LCD screen displays 100%, it means full. This charging process is about 3 hours.



Car Charger About 7-9 Hours



Solar Panels (Optional)
About 3-8 Hours (Depending on Weather)



Instruction


How to use this product:


1. Plug in your device and press the button which you are going to use.
2. When the port icon appears on the LCD screen, the output port will turn on for charging your device.
3. The continuous AC output port can only charge/power devices that operate at less than 1200 Watts. Once this limit is exceeded, the product will shut off automatically.
4. The AC port output will be turned off automatically after 45 minute when being drawn under 2W power to save power.
5. The DC port or car charger port will be off automatically in 45 minute when being drawn under 2W power for power saving.
6. If the product is not used for a long time, it should be recharged every 3 months and keep the power at 60% -80%. Please keep it in a cool and dry place.


Note


Press the AC button to turn off the output to save power when the AC power port is not in use.


 The using time of current power.  The current total output power.


 **USB** Press USB button for USB port and wireless functions


 **DC** Press DC button for DC port function.

 **TYPE-C** Press USB button and plug Type-c cable for Type-C port function.

 **AC** Press AC button for AC port function.

 The fan is working if the temperature is over 40°C.

 Overload warning.

 Temperature warning of Inverter. Temperature range 90°C- 95°C.

DC Input

Support AC adaptor charging.




Support car charger charging.

















Anderson input

Support solar panel charging (12-60V).


Button: Press button to turn on and press button for 10 seconds to turn off.

SPECIFICATIONS

 Capacity	1008Wh(45Ah 22.4V)	 Input	AC Input 600W MPPT 600W 12-60V
 DC Output 1	120W(Max) 12V 10A	 USB Output	5V 2.4A*2 QC3.0*2
 AC Output	AC Continuous Power: 1200W <input type="checkbox"/> 100V 60HZ <input type="checkbox"/> 110V 60HZ <input type="checkbox"/> 120V 60HZ <input type="checkbox"/> 220V 50HZ <input type="checkbox"/> 230V 50HZ <input type="checkbox"/> 240V 50HZ	 Type-C Output	Type-C-1: PD 100W Type-C-2: PD 27W

 LED	15W	 Weight	N.W : 11.39 Kg
 Battery	LiFePO4 Battery	 Dimensions	387.2*226*250mm
 Wireless	10W		Pure Sine Wave
 Management System	Temperature control Surge protection Short circuit protection Over-current protection Low-voltage protection	 Lifecycles	>3000 Cycles
 Warranty	24 Months	 Discharging Temperature	-20°C to 60°C
		 Recharging Temperature	0°C to 45°C
		 Certifications	   

WHAT'S IN THE BOX



Power Station 1200W Car Charger Cable AC charging cable User Manual

Support charging device

USB port: Smart phones, tablets, smart watches, digital cameras, e-readers, etc.

12V Car charger port: Car charger

DC output: Drones, routers, car refrigerators, etc. use 12V as the power supply device.

AC power: Laptops, displays, appliances, etc.