





Bi Metallic Fixed Temperature Switch

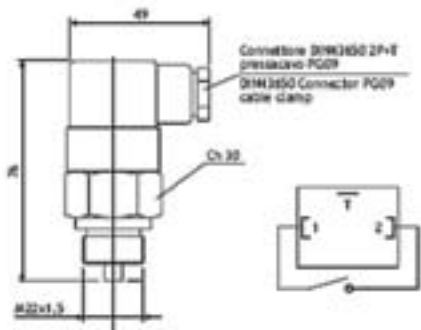

Dati elettrici / Electrical data
 Tensione max. / Max. voltage 250V/ca
 Corrente max. / Max. current 16A
 Tolleranza intervento / Tolerance $\pm 5^\circ\text{C}$
 Differenziale fisso max. / Fixed hysteresis max. 15°C
 Connessione elettrica / Electrical connection DIN43650
 Protezione elettrica / Protection degree IP55
 Temperatura max. / Max temperature 130°C

Switch Number	Working Temperature	Contact NA=Normally open NO=Normally closed
T01-M22 x 1.5	36-26	NA / NC
T02-M22 x 1.5	42-33	NA / NC
T03-M22 x 1.5	52-42	NA / NC
T04-M22 x 1.5	65-55	NA / NC
T05-M22 x 1.5	75-65	NA / NC
T06-M22 x 1.5	85-75	NA / NC
T07-M22 x 1.5	95-85	NA / NC

Foot Mounting Flanges for ST Coolers

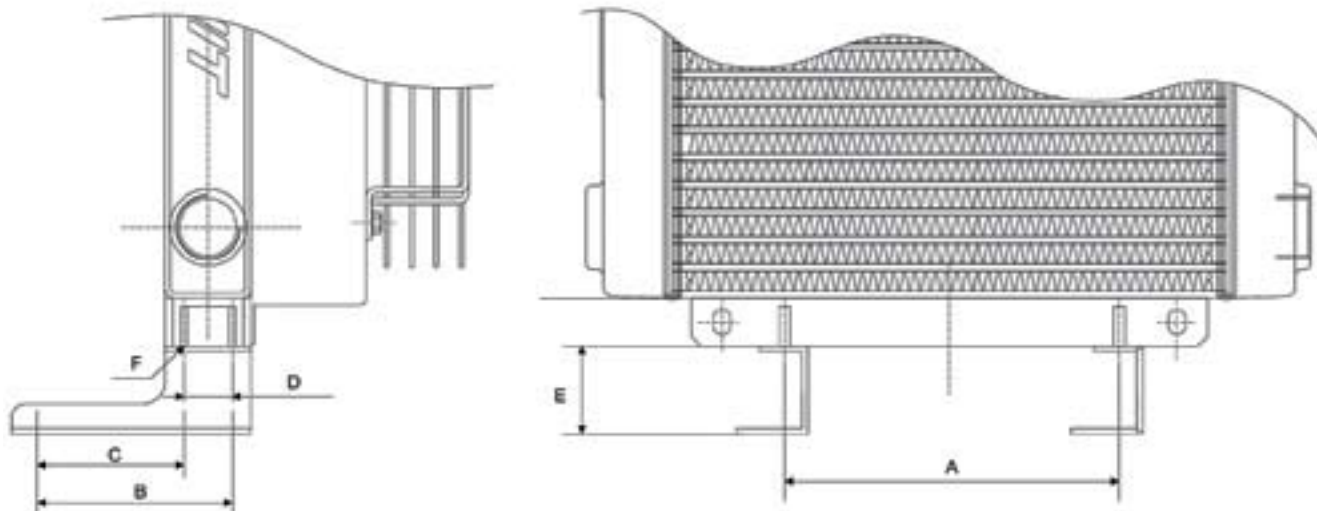

Type	Foot Flanges	A	B	C	D	E	F
ST50	P-SSA50-VN	140	125	101	24	45	M6
ST60	P-SSA50-VN	190	125	101	24	45	M6
ST100	P-SSA100-VN	190	127	91	36	50	M6
ST150	P-SSA100-VN	250	127	91	36	50	M8
ST180	P-SSA100-VN	370	127	91	36	50	M8
ST210	P-SSA210-VN	370	144	78	66	50	M8
STD50	P-SSA50-VN		125	101	24	45	M8