



DATA SHEET 6-6-2 ISO

FRONT 6-6-2

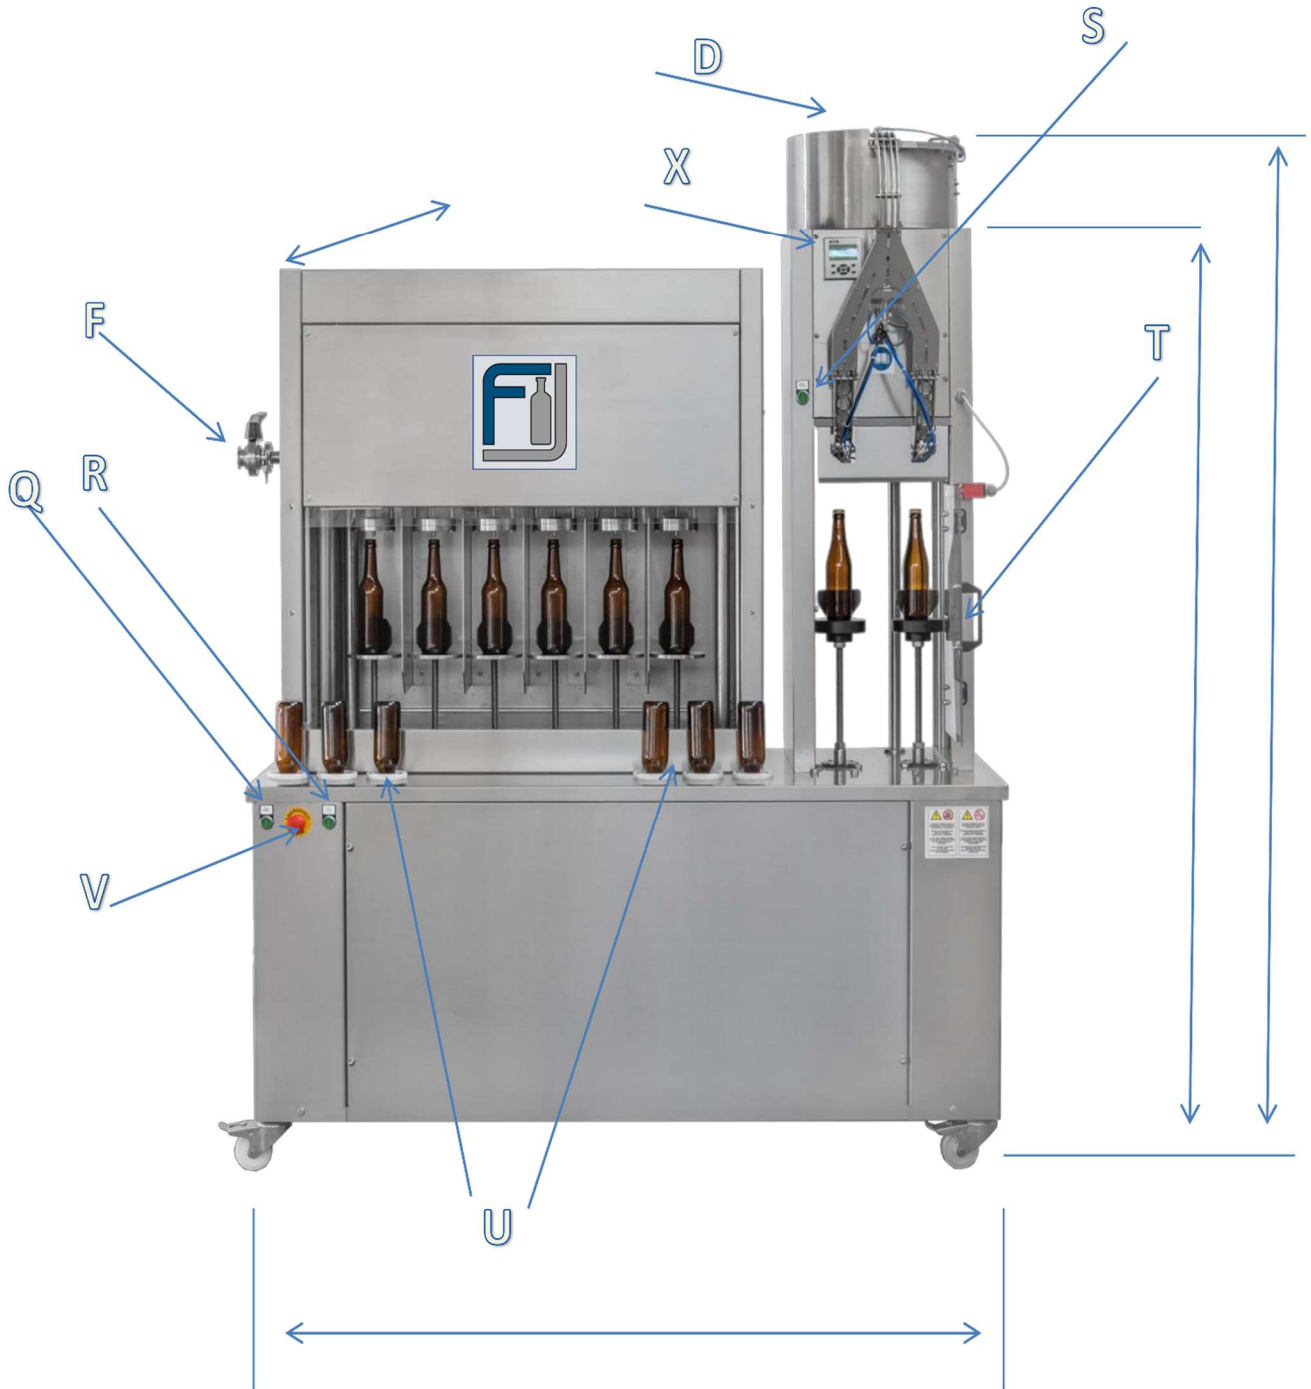

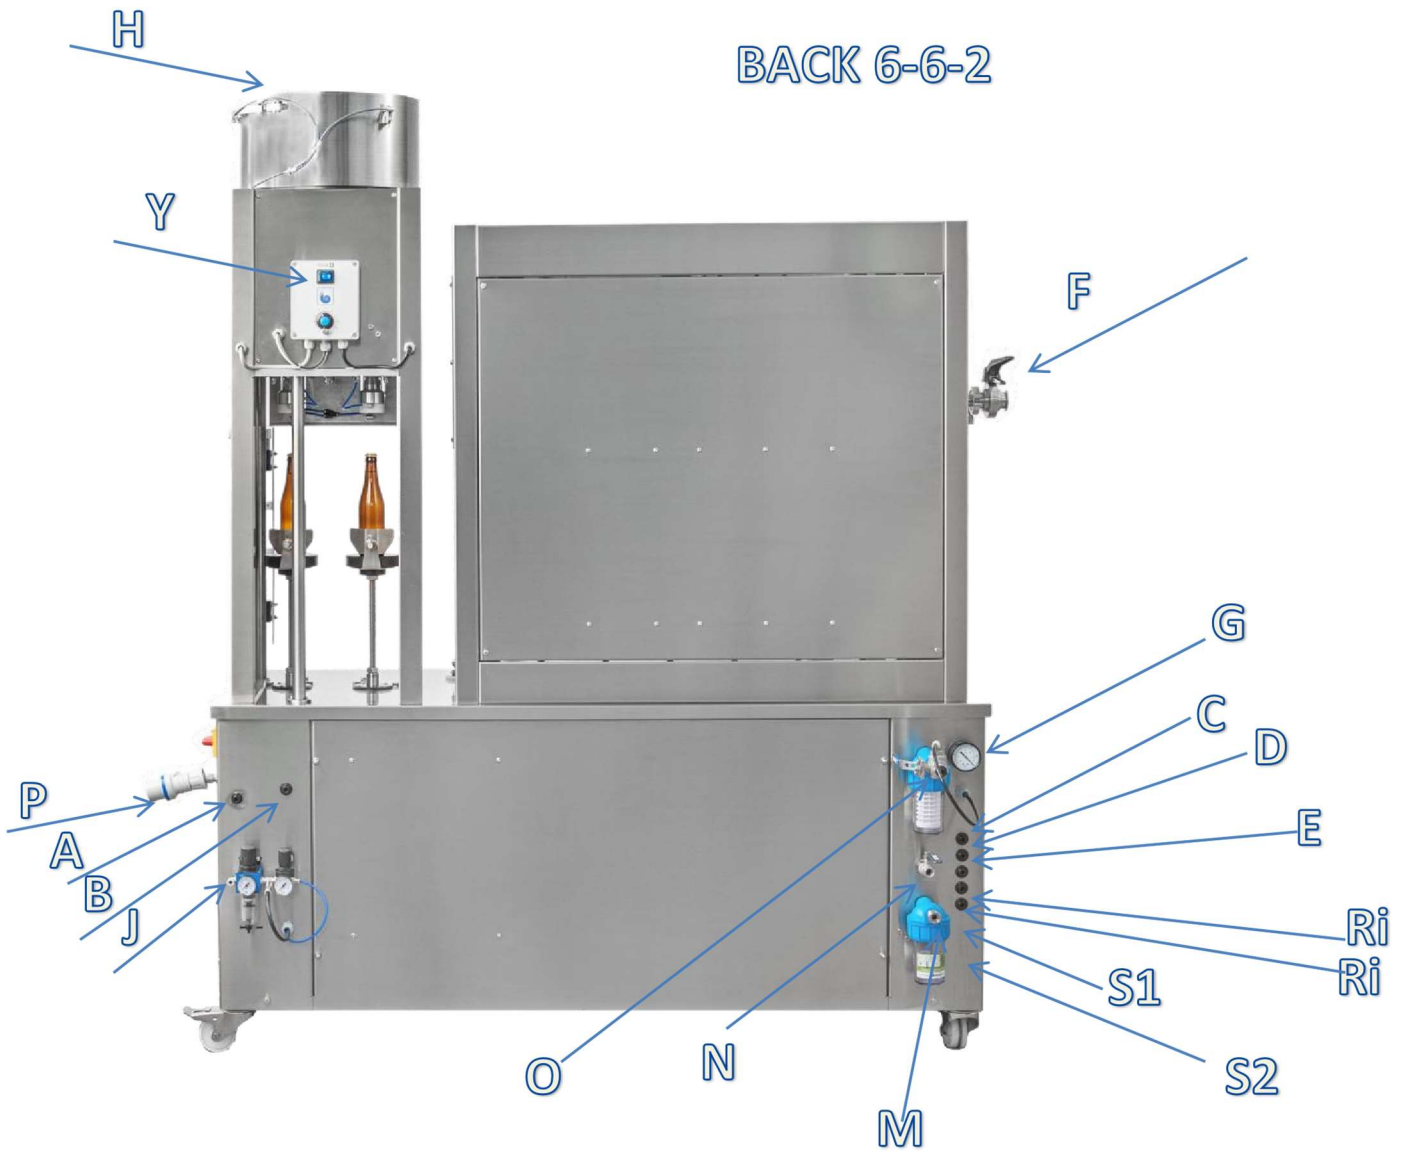

4-4-2 DIMENSIONS: 140 X 80 HEIGHT 187 WITH HOPPER 210 CM 6-6-2 DIMENSIONS: 165 X 80 HEIGHT 187 WITH HOPPER 210 CM

PACKING DIMENSIONS: 190 x 120 x height 212 weight around 600 kg

- A – Co2/nitrogen inlet for COUNTER PRESSURE FILLER Max 5 bar
- B – Co2/nitrogen inlet for Spray before capping Max 0,5 bar
- C – DEGASSING BOTTLES OUTLET *8mm SECTION "C"*
- D – VENT VALVE *8mm SECTION "D"*
- E – DUMMY BOTTLES DISCHARGE *8mm SECTION "E"*
- F – PRODUCT INLET TRI CLAMP 1"
- G – VACUUM GAUGE INSPECTION
- H – CAPS SORTER
- J – Air Inlet from the Air compressor 8-bar
- Y - CAPS SORTER ON-OFF
- Ri – RINSER PRODUCT DISCHARGE *8mm SECTION*
- S1 – S2 Unloading filler tank upper(S1) and lower (S2)*
- M – RINSER FILTER AND RINSER PRODUCT INLET *max 4 BAR ½" inch female CONNECTION*
- N – SPRAY BALL WASCHING PRODUCT INLET *max 5 BAR 3/8" inch female CONNECTION*
- O – VACUUM PIPE OUTLET DURING CIP *8mm SECTION*
- P – POWER PLUG IN 220V SINGLE PHASE 24V 50hz
- Q – EMERGENCY BUTTOM
- R – START FILLING CYCLE / START C.I.P. CYCLE
- S – START CYCLE CROWN CAPPER MACHINE / *START Co2/NITROJEN INJECTION BEFORE CAPPING*
- T – SAFETY DOOR
- U – RINSER BOTTLES BASKETS
- V – EMERGENCY BUTTOM
- X – DISPLAY WITH ALL CYCLE COMAND