

Thule Chariot Captain

> Instructions

CONTENTS

1 INTRODUCTION

- 1.0 Thank You
- 1.1 Manual Intended Use
- 1.2 Carrier Intended Use
- 1.3 Specifications

2 PARTS DESCRIPTION

- 2.0 Included in the box

3 SAFETY

- 3.0 Safety Introduction
- 3.1 Symbols and Instructions
- 3.2 General Safety Instructions

4 GETTING STARTED

- 4.0 Unpacking Your Carrier
- 4.1 Included Components
- 4.2 Unfolding the Carrier
- 4.3 Folding the Carrier
- 4.4 Installing the Parking Brake
- 4.5 Installing the Wheels
- 4.6 Removing the Wheels
- 4.7 Installing the Handlebar
- 4.8 Installing a Thule Conversion Kit

5 USE & FEATURES

- 5.0 Setting the Parking Brake
- 5.1 Using the Two-in One Cover
- 5.2 Child Placement and Seatbelt
- 5.4 Using the Safety Wrist Strap
- 5.5 Adjusting the Thule Suspension
- 5.6 Using the Sunscreen
- 5.7 Using the Side Vents
- 5.8 Storage

6 ADDITIONAL INFORMATION

- 6.0 Accessories
- 6.1 Service and Care
- 6.2 Storage
- 6.3 Wear and Tear

1 INTRODUCTION

Thank you for choosing a Thule Chariot Captain. Your new carrier offers superior quality, safety features and comfort.

PLEASE NOTE:

All Thule child carriers are designed with the end consumer in mind and their desire for maximum flexibility & performance; in order to achieve this, the purchase of conversion kit(s) is required allowing you to choose the activity you desire while also eliminating the need to purchase several dedicated child carriers. The four Thule Conversion Kits available for sale from your local dealer are:



Thule Strolling Kit



Thule Jogging Kit



Thule Bicycle Trailer Kit



Thule Cross-Country Skiing
& Hiking Kit

Thule Child Transport Systems Ltd. retains all rights to this Owner's Manual. No text, details, or illustrations from this manual may be reproduced, distributed, or become the subject of unauthorized use for commercial purposes, nor may they be made available to others.

Additional Manuals for using this carrier may be downloaded from www.thule.com.

Great care has been taken in assembling this manual. Nevertheless, should you discover any errors, we would be grateful if you could bring them to our attention.

1.1 MANUAL INTENDED USE

Who is this Manual intended for?

This Manual is intended for the purchaser and user of the carrier, who is also responsible for keeping it in proper condition, carrying out maintenance as prescribed and performing repairs.

When using this carrier with the Thule Bicycle Trailer Kit, please also follow the owner's manual of the bicycle used for towing and the specifications there regarding the maximum allowable full load for the bicycle.

1.2 CARRIER INTENDED USE

Use as intended

The carrier is intended for use within the performance ranges specified for the carrying of children in daylight hours, on sidewalks, light traffic public roads, and smooth paths.

Luggage may also be carried in the storage bags

1.3 SPECIFICATIONS

Maximum Passenger Weight	Captain 22kg / 49lb
Maximum Load Carrying Capacity Including Passenger(s) and Cargo Combined	45Kg / 100lb
Number of child(ren)	1 or 2
.....	
Dimensions without handlebars (Length x Width x Height)	114 x 85 x 108 cm 45 x 34 x 43 in
.....	
Dimensions folded (Length x Width x Height)	108 x 82 x 42 cm 43 x 32 x 17 in
.....	
Weight of child carrier without Thule conversion kits	17kg / 37 lb
.....	
Maximum body height of passenger(s)	111 cm / 44 in
Head / helmet must not stick out of the carrier frame	
.....	

intended for that purpose, provided the children in the carrier are not put at risk.

If the child carrier is used in conditions of poor visibility, at dusk or in the hours of darkness, it is highly recommended to be fitted with a safety approved working light set.

As part of the recommended use, you should also follow this Owner's Manual and comply with the prescribed maintenance requirements.

Use not recommended

Any use that goes beyond the above is not recommended.

Use not recommended is primarily the conveying of people together with animals, use of this carrier on rough off-road terrain, use for commercial purposes, overloading, excessive speed and improper repair of defects or modifications.

The manufacturer is not liable for damages arising from use that is not recommended – this is at the risk of the user.

2

PARTS DESCRIPTION

INCLUDED

- A. Captain chassis
- B. 2 - 18" Aluminum wheels
- C. Handlebar
- D. Parking Brake
- E. 2 in 1 weather cover



3 SAFETY

The safe use of this child carrier is vital to the enjoyment of it. For that reason it is extremely important that you familiarize yourself with the safety instructions in this manual and follow them whenever you use this child carrier.

3.1 SYMBOLS AND INSTRUCTIONS

This owner's manual uses warnings and notices throughout to emphasize safety and optimal use information.



WARNING

Warnings provide instructions critical to the safe use and operation of this child carrier. Failure to follow these instructions could result in an accident, potentially causing serious injury or death to you and/or your passenger(s).

NOTICE

Notices provide additional instructions to make using the product easier.

3.2 GENERAL SAFETY INSTRUCTIONS

- Important – Keep these instructions for future reference.
- Your child's safety may be affected if you do not follow these instructions.
- Never leave a child unattended in this child carrier.
- Put on the park brake whenever you park this child carrier.
- Do not carry extra children or bags on this child carrier.
- This child carrier will become unstable if the manufacturer's recommended load is exceeded.
- Do not use with children who exceed the weight limitations.

- When using this child carrier with only one child, the child should be seated in the center seating position.
- The user of this child carrier must be aware of exposure hazards such as wind chill and heat exhaustion, either by less active children in prolonged exposure in colder temperatures, or by extended periods in warmer temperatures without adequate ventilation or hydration.
- Do not allow any of the children's body, clothing, shoe laces, or toys to come into contact with moving parts.
- Care must be taken when folding and unfolding this child carrier to prevent finger entrapment. Ensure children are clear of any moving parts, otherwise they may be injured.
- Do not install a car seat or any other seating device not approved by Thule Child Transport Systems Ltd. on this child carrier.
- Only use Thule Child Transport Systems Ltd. approved rack products otherwise this child carrier will become unstable if any other parcel bag or rack is used.
- Do not use any accessory products which are not approved by Thule Child Transport Systems Ltd.
- Do not use any cleaning solvents on this child carrier, clean only with mild soap and water.
- Make no modifications to this child carrier.
- Do not use this child carrier around or near an open fire or exposed flame.
- A reflector that complies with CPSC regulations shall be visible on the rear of this child carrier when it is used for cycling.
- Before each ride, ensure the attached child carrier does not interfere with braking, pedaling, or steering of the bicycle.
- Never ride a bicycle at night without adequate lighting. Obey all local legal requirements for lighting.



WARNING

This product is not suitable for skating.



WARNING

This product is not suitable for running unless a Thule Jogging Kit is attached.



WARNING

Do not let your child play with this product.

4

GETTING STARTED

4.0 UNPACKING YOUR CARRIER



- A. Open the box flaps and remove the staples. (See image 1)
- B. Remove the handlebar from inside the box and set it beside the box.
- C. Lay the box on its side on a clean, sturdy surface.
- D. Slide the carrier and wheels out of the box.
- E. Remove both of the spring spacers from the leaf springs on both sides of the carrier. Press firmly down on the carrier against the ground and pull the spacers out by the tag.

4.1 INCLUDED COMPONENTS


Verify that your carrier was packaged with the following items:

- Captain Chassis
- Two-in-One Cover (on Chassis)
- Handlebar
- Two 18 inch Wheels
- Parking Brake
- The Owner's Manual

NOTICE

Store your carrier and its components in a safe dry place so that when they are needed, they are in the best possible condition.

4.2 UNFOLDING THE CARRIER

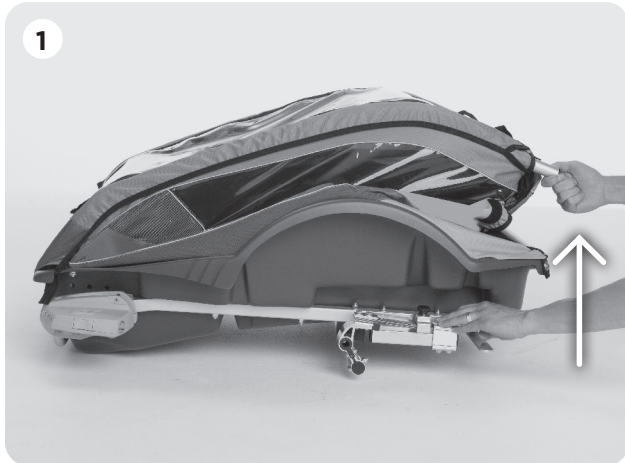


- A. With one hand on the upper frame and the other hand on the lower frame, pull the two halves apart.
(See image 1)
- B. With one hand on the upper frame and the other hand on the back frame, pull the back frame rearward until the auto-lock discs engage.
(See image 2)
- C. Verify that the carrier's frame is locked by giving the back frame a push inwards.



WARNING

Ensure that all the locking devices are engaged before use.

4.3 FOLDING THE CARRIER

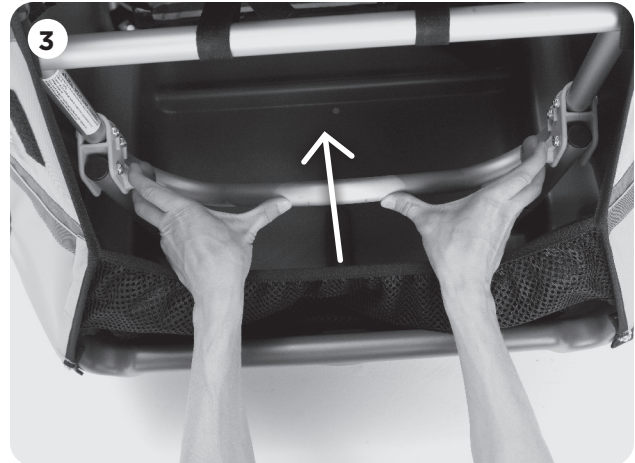

- A. With two hands, pull or release the auto-lock discs on both sides of the back frame. With the locks released, give the back frame a sharp push inwards.
(See image 3)
- B. With one hand on the upper frame and the other hand on the carrier axle, push the two halves together.



WARNING

Care must be taken when folding and unfolding this child carrier to prevent finger entrapment. To avoid injury ensure that your child is kept away when unfolding and folding this product.

4.4 INSTALLING THE PARKING BRAKE



- A. Lay the chassis on its roof on a clean sturdy surface.
- B. With the screwdriver and 7/16" wrench remove the locking nut and white nylon washer from the bolt on the brake lever.
- C. Insert the bolt along with the black bushing and brake lever through the hole at the back of the chassis. (See image 1)
- D. Place the white nylon washer and the nut back onto the bolt and tighten it until one screw thread is exposed.
- E. With the wrench remove the locking nuts on both of the bolts on the back corners of the chassis.
- F. Insert the bolts on the back corners of the chassis through the holes on the brake arms. (See image 2)
- G. Place the locking nuts back onto the bolts on the back corners of the chassis and tighten them until one thread is exposed. (See image 2)

4.5 INSTALLING THE WHEELS



- A. Disengage the parking brake.
- B. Press and hold the wheel release button.
- C. Insert the wheel axle into an axle socket. (See image 3)
- D. Release the wheel release button.
- E. Press the wheel fully into the axle socket.
- F. Verify that the wheel is securely attached to the carrier by giving it a sharp pull.
- G. Repeat for the other wheel.
- H. Using a tire pressure gauge check the air pressure in each tire. The minimum recommended tire pressure is 30 psi (2.1 bar) and the maximum is 35 psi (2.5 bar).
- I. If air pressure is too low in either one of the tires fill them up using a bicycle tire pump.





WARNING

Before each journey make sure that both of the wheels are securely locked in the carrier axle.

4.6 REMOVING THE WHEELS



- A. Disengage the parking brake.
- B. Press and hold the wheel release button on a wheel.
(See image 1)
- C. Pull the wheel out of the carrier axle.
- D. Repeat for the other wheel.

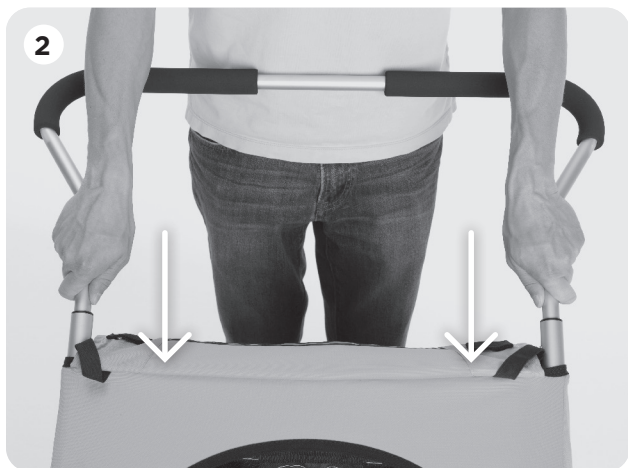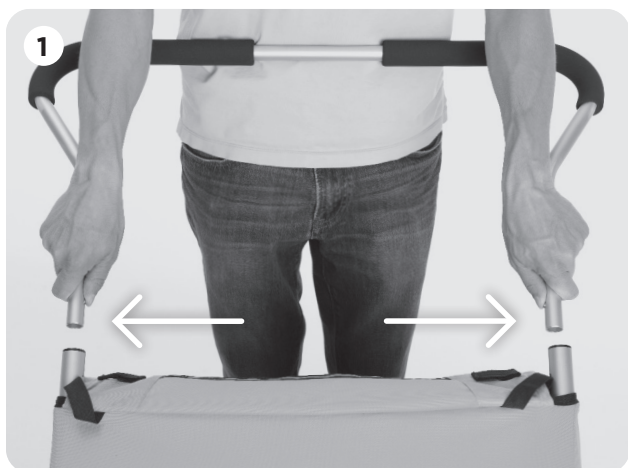

NOTICE

The HeightRight™ adjustable handlebar has two positions; high and low. Remove the handlebar and turn it over to change between these two positions.



WARNING

Any load attached to the handle affects the stability of the child carrier.

4.7 INSTALLING THE HANDLEBAR

- A. Position the handlebar behind the carrier with the handles pointing rearwards.
- B. With both hands press and hold the spring pins in on both ends of the handlebar. (See image 1)
- C. Slide both ends of the handlebar into the upper frame of the carrier. Allow the spring pins to pass inside the upper frame. (See image 2)
- D. Slide the handlebar into the upper frame until the spring pins engage.
- E. Verify that the handlebar is securely attached to the carrier by giving it a sharp pull - it should not pull out.
- F. To remove the handlebar; press both of the spring pins through the upper frame and pull the handlebar out. Repeat this process to remove the brake handle from the handlebar.


4.8 INSTALL A THULE CONVERSION KIT

- A. Select a Thule Conversion Kit from the following:
 - Thule Strolling Kit
 - Thule Jogging Kit
 - Thule Bicycle Trailer Kit
 - Thule Cross-Country Skiing & Hiking Kit
- B. Install and use the selected kit according to the instructions included with the Thule Conversion Kits.

5

USE & FEATURES

5.0 SETTING THE PARKING BRAKE

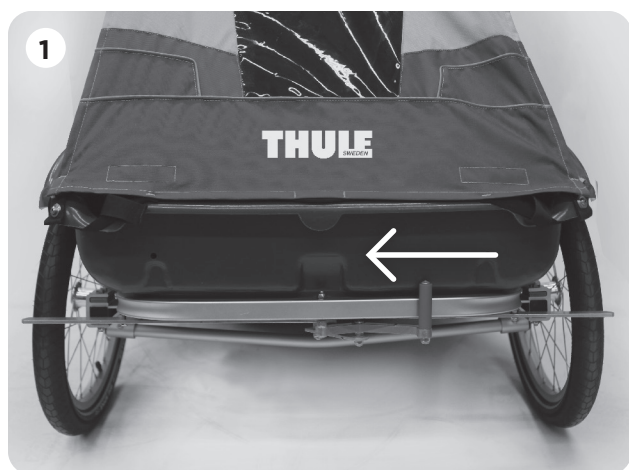

- A. Grasp the red handle on the brake lever and swing it to the left. (See image 1)
- B. After engaging the brake always verify that the parking brake is working - the carrier should not roll forwards or backwards.
- C. Grasp the red handle on the brake lever and swing it to the right to release the parking brake. (See image 2)



WARNING

Never leave your child unattended in this child carrier.

The parking brake should always be engaged during the loading and unloading of children.

5.1 USING THE TWO-IN ONE COVER



- A. To improve the air flow inside the carrier; roll up the plastic window. Use the elastic rings at the top of the cover to keep the window up.
- B. To keep the elements out of the carrier; unroll the plastic window. To close the window, pull down the zippers on the side of the front window.
- C. To open the cover; pull down on the thumb tabs at the bottom of the cover to unhook it from the front of the carrier.
- D. To close the cover; pull down on the thumb tabs at the bottom of the cover and hook it back onto the front of the carrier. (See image 1)
- E. To remove the cover from the carrier; remove the handlebar, open the cover, and slide the top of the cover up, off of the upper frame.
- F. To put the cover back on the carrier; remove the handlebar and slide the holes at the top of the cover back over the upper frame.



WARNING

The user of this child carrier must be aware of exposure hazards such as wind chill and heat exhaustion, either by prolonged exposure in colder temperatures, or by extended periods in warmer temperatures without adequate ventilation or hydration.



WARNING

When this child carrier is used as a cycle trailer, the weather cover should be closed to prevent debris from entering the carrier.

5.2 CHILD PLACEMENT AND SEATBELT

- A. Engage the parking brake.
- B. Open the two-in-one cover.
- C. Loosen all of the belt adjustments.
- D. Undo the crotch strap buckle on the shoulder harness by pressing the red release button.
- E. Seat your child(ren).
- F. Slide the shoulder belt height adjustment located on the vertical web straps, in the seat back, to the same height as your child(ren)'s shoulders. (See image 1)
- G. Lift up the crotch strap and connect the two shoulder strap buckles together and then insert them together into the crotch buckle. (See image 2)
- H. Adjust the harness system using the shoulder length adjustments until the crotch strap buckle is positioned above their lower chest. (See image 3)
- I. Snugly tighten the two shoulder straps by pulling downward on the shoulder strap loose ends. Ensure that there is no looseness in the harness system at the child's waist and shoulders. Ensure the shoulder pads are positioned on top of the child's shoulders and next to their neck.



WARNING

This seat unit is not suitable for children under 6 months. Use a harness as soon as your child can sit unaided.

Do not add a pad thicker than 10 mm.

Check that the seat unit attachment devices are correctly engaged before use.

NOTICE

When seating a single child in a Thule Captain 2 always seat the child in the right side.

5.3 USING THE SAFETY WRIST STRAP



- A. Loop the free end of the safety wrist strap around your wrist to prevent the child carrier from becoming separated from you. (See image 1)
- B. When not in use stow the free end of the safety wrist strap inside the large cavity in the back of the carrier.



WARNING

Failure to use the safety wrist strap could cause the carrier to become separated from you resulting in an accident in which your passenger(s) could suffer serious injury or death.

5.4 ADJUSTING THE ADJUSTABLE SUSPENSION



- A. Without an occupant inside the carrier, loosen the adjustment knob (turn it counterclockwise). (See image 2)
- B. Slide the adjustment bracket along the leaf springs and line it up to the total weight inside the carrier. (i.e. your child(ren)'s weight plus cargo weight.)
- C. Tighten the adjustment knob (turn it clockwise).

5.5 USING THE SUNSCREEN



- A. To enclose the back of child carrier, roll the back flap down the back of the carrier. Use the velcro at the bottom of the back flap to keep it closed.
- B. To shade inside the child compartment; roll the back flap down the front of the carrier. Use the velcro at the bottom of the sunscreen to keep it closed. (See image 3)
- C. To completely open up the front and back of the child carrier, roll the back flap up. Use the elastic rings at the top of the back flap to keep it up.

5.6 USING THE SIDE VENTS



- A. To further improve the air flow inside the carrier; pull one or both of the side vents open. (See image 1)
- B. To keep the elements out of the carrier; press the side vents closed. Use the velcro along the edges to keep the vents closed.

5.7 STORAGE



Your carrier is equipped with the following storage compartments:

- A. One large cavity in the back. (See image 2)
- B. Two small mesh pockets inside the carrier at the front. (See image 3)

NOTICE

The maximum load capacity of the cargo bag is 4 kg (8.8 pounds).



WARNING

Do not carry extra children or bags on this child carrier.

6

ADDITIONAL INFORMATION

6.0 ACCESSORIES

There are numerous accessories that are compatible with your Chariot:

- Hydration Cage
- Cup Holder
- Jogging Brake
- Axle-Mount ezHitch Partial
- Shimano Internal Hub Hitch Adapter
- SRAM Internal Hub Hitch Adapter
- Infant Sling
- All-Season Bunting Bag
- Baby Supporter
- Storage Cover
- Rain Cover

Contact your local dealer or visit our website: www.thule.com for more information.



WARNING

The proper service and care of this child carrier affects the performance and safety of it.

6.1 SERVICE AND CARE

Regularly inspect your child carrier, Thule Conversion Kit(s) and accessories for damage and signs of wear.

Metal Components

Check for any dents or cracks. Do not use the child carrier if any metal components are cracked or damaged.

Fasteners

Regularly examine the child carrier to see if any of the fasteners are bent, broken, missing or loose. Tighten any loose fasteners and replace any damaged or missing fasteners.

Suspension

Inspect the springs for cracks or any signs of fatigue. Slide the adjustment bracket back and forth and inspect the full length of each spring. Do not use the child carrier with any cracked or broken springs.

Fabric

Examine the fabric regularly for tears, worn spots or any other signs of damage. Any holes in the fabric could allow a child's hand to come into contact with the wheels or road surface.

Wheels

Clean the wheel axles and apply grease or oil to all exposed moving parts. Have the wheels inspected and serviced at least once a year.

It is highly recommended that you take your child carrier into an authorized service provider once a year to keep it in the best possible condition.

Regularly clean the child carrier with warm water and a mild soapy solution. Never use harsh cleansers or

solvents.

6.2 STORAGE

Store your child carrier, Thule Conversion Kit(s) and accessories in a dry area out of direct sunlight. If possible, hang the child carrier up off of the ground. Before storing your child carrier, it should be dry to prevent the growth of mold or bacteria. Do not store the wheels in contact with the windows. Do not store the child carrier coupled to a bicycle for long periods of time.

6.3 WEAR AND TEAR

This child carrier is very durable and allows you to transport your child(ren) for long periods of time. It is subject to wear and tear over time depending on several factors.

Use and Milage

The more often this child carrier is used and the farther it goes the more it will wear.

Service and Care

Keeping this child carrier clean and well maintained is an important factor in keeping it in good condition.

Storage

Storing this child carrier properly will reduce the amount of wear, especially to the fabric.

Type of Use

Hard cornering, fast acceleration and braking all contribute to premature wear of various components especially brakes and tires.

Weather

Various weather conditions affect individual components differently. Direct sunlight prematurely wears the fabric, windows and rubber wheels. Salt in the air or on the road affects the wheel rims and fabric floor. Dirt and mud can get into moving parts and contribute to wear as well.

Extreme use of this carrier can lead to premature wear. The way this child carrier is used and cared for will greatly affect how quickly it wears.

