
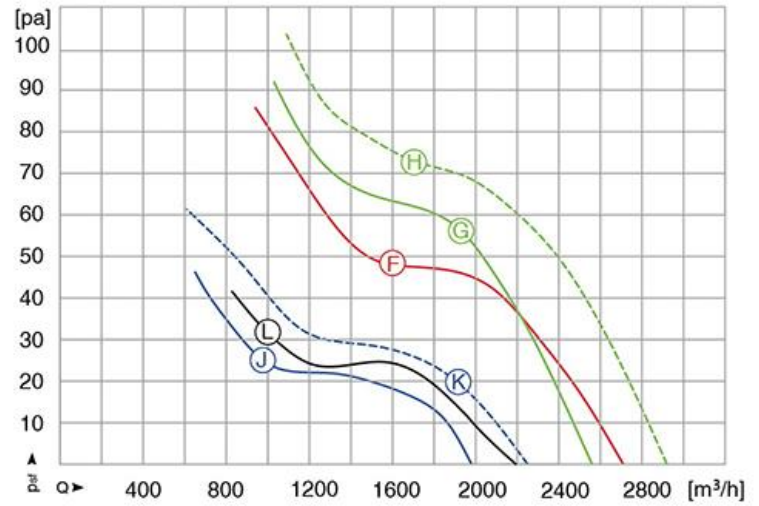
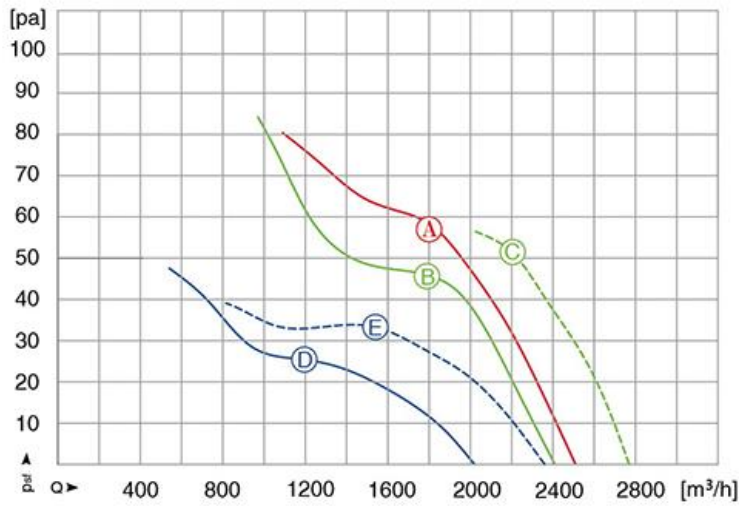


外转子轴流风机系列 AC AXIAL FAN

Φ350

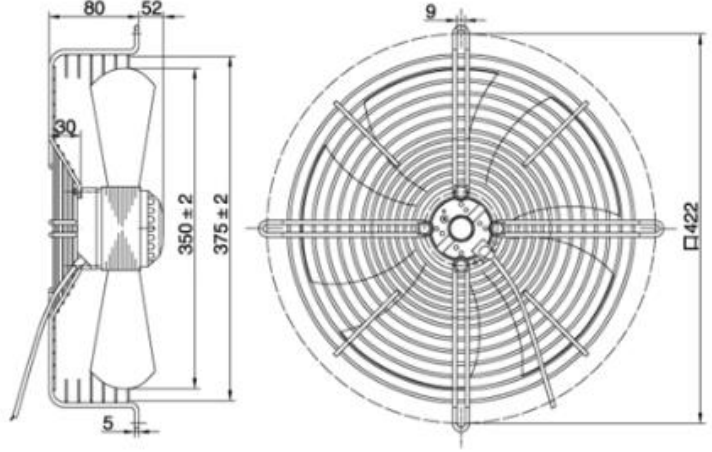

动压 / Dynamic pressure: $p_d = 5.0 \times 10^{-6} \times Q^2 (p_a)$

型号 MODEL	电压 UAC	频率 f	电容器 C	曲线 CURVE	输入功率 P1	转速 n	电流 I	静压 Psf	环境温度 Temp.	静压效率 ηsf	能效值 EFF. Grade	噪声 Noise	备注 Note
	V	Hz	μF/450V	NO.	W	r/min	A	Pa	℃	%	N	dB/(A)	
YDWF74L34P4-□-350	1~220	50	4	A	143	1371	0.65	58	-40~+75	20.51	32.0	63	
YDWF74L34P4-□-350	1~220	50	4	B	118	1387	0.56	46	-40~+80	—	—	62	
YDWF74L34P4-□-350	1~220	60	4	C	161	1575	0.73	52	-40~+80	19.63	30.9	66	
YDWF74L34P6-□-350	1~220	50	4	D	77	903	0.35	26	-40~+80	—	—	56	
YDWF74L34P6-□-350	1~220	60	4	E	99	1018	0.47	33	-40~+80	—	—	57	
YSWF74L34P4-□-350	3~380	50	—	F	136	1373	0.33	48	-40~+85	21.05	32.7	63	
YSWF74L34P4-□-350	3~380	50	—	G	143	1365	0.34	55	-40~+85	20.66	32.2	63	
YSWF74L34P4-□-350	3~380	60	—	H	193	1512	0.36	74	-40~+85	21.20	31.9	66	
YSWF74L34P6-□-350	3~380	50	—	J	90	922	0.25	25	-40~+85	—	—	57	
YSWF74L34P6-□-350	3~380	50	—	K	92	918	0.26	20	-40~+85	—	—	57	
YSWF74L34P6-□-350	3~380	60	—	L	107	1041	0.24	31	-40~+90	—	—	58	

注：性能曲线在安装马尔导风圈时测得；□表示安装附件。

Note: the performance curve obtained by installation MAER wall plate measurement ; □ express installation accessories.