


动压/ Dynamic pressure: $p_d = 1.83 \times 10^{-7} \times Q^2 (p_a)$

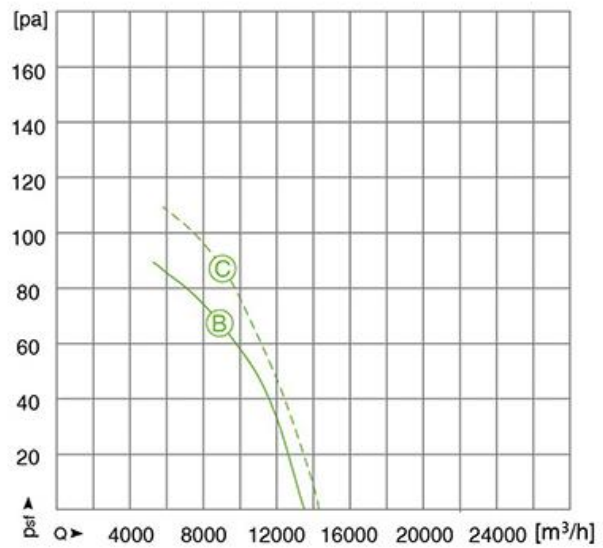

型号 MODEL	电压 UAC	频率 f	电容器 C	曲线 CURVE	输入功率 P1	转速 n	电流 I	静压 Psf	环境温度 Temp.	静压效率 ηsf	能效值 EFF. Grade	噪声 Noise	备注 Note
	V	Hz	μF/450V	NO.	W	r/min	A	Pa	℃	%	N	dB(A)	
YSWF127L65P6-□-800	3~380	50	—	A	1126	906	2.44	124	-40~+70	34.79	40.6	77	
YSWF127L65P8-□-800	3~380	50	—	B	704	661	1.63	68	-40~+65	23.78	30.9	75	
		60	—	C	834	747	1.65	85	-40~+65	26.35	33	77	

注：性能曲线在安装马尔导风圈时测得；□表示安装附件。

Note: the performance curve obtained by installation MAER wall plate measurement ; □ express installation accessories.