




100104

Two-way ball valve
 Drive: Inox lever
 Connection: NPT female/female thread
 Flow: full
 Material: Aisi 316
 Measure: from 1/4" to 4"
 Seals: virgin P.T.F.E.
 Operating temperature: -20°C +160°C
 Outer finish: polished


On request

Antistatic device ATEX (Directive 94/9/EC)

- ISO 7 thread **Art.100102**
- Seals made of:
 P.T.F.E. with glass
 P.T.F.E. with carbographe
 High-molecular weight polyethylene

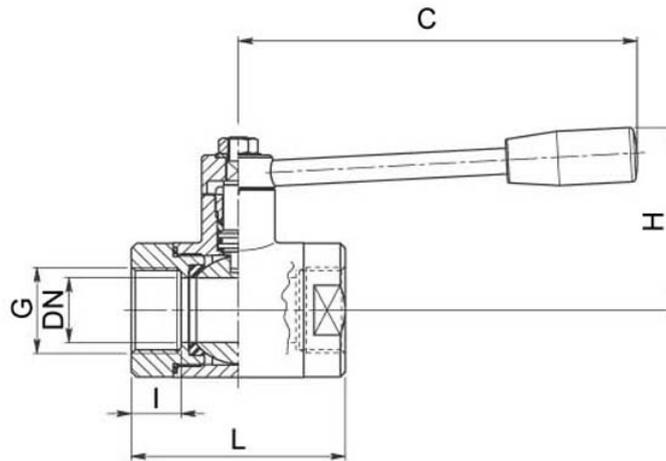

G	DN	LL	I	C	H	PN	KG	CODE AISI 316L
1/4"	9	52	13	110	50	64	0,34	100104 60410
3/8"	10	52	13	110	50	64	0,32	100104 60810
1/2"	15	62	16	110	55	64	0,44	100104 61410
3/4"	20	72	18	110	60	64	0,62	100104 62010
1"	25	82	19	160	65	40	1,10	100104 62610
1"1/4	32	92	20	160	70	40	1,35	100104 63010
1"1/2	40	104	20	190	80	40	2,33	100104 63410
2"	50	116	20	190	90	25	3,42	100104 63810
2"1/2	65	136	26	220	110	25	-	100104 64410
3"	80	160	28	285	130	25	-	100104 64810
4"	100	192	30	310	150	25	-	100104 65410

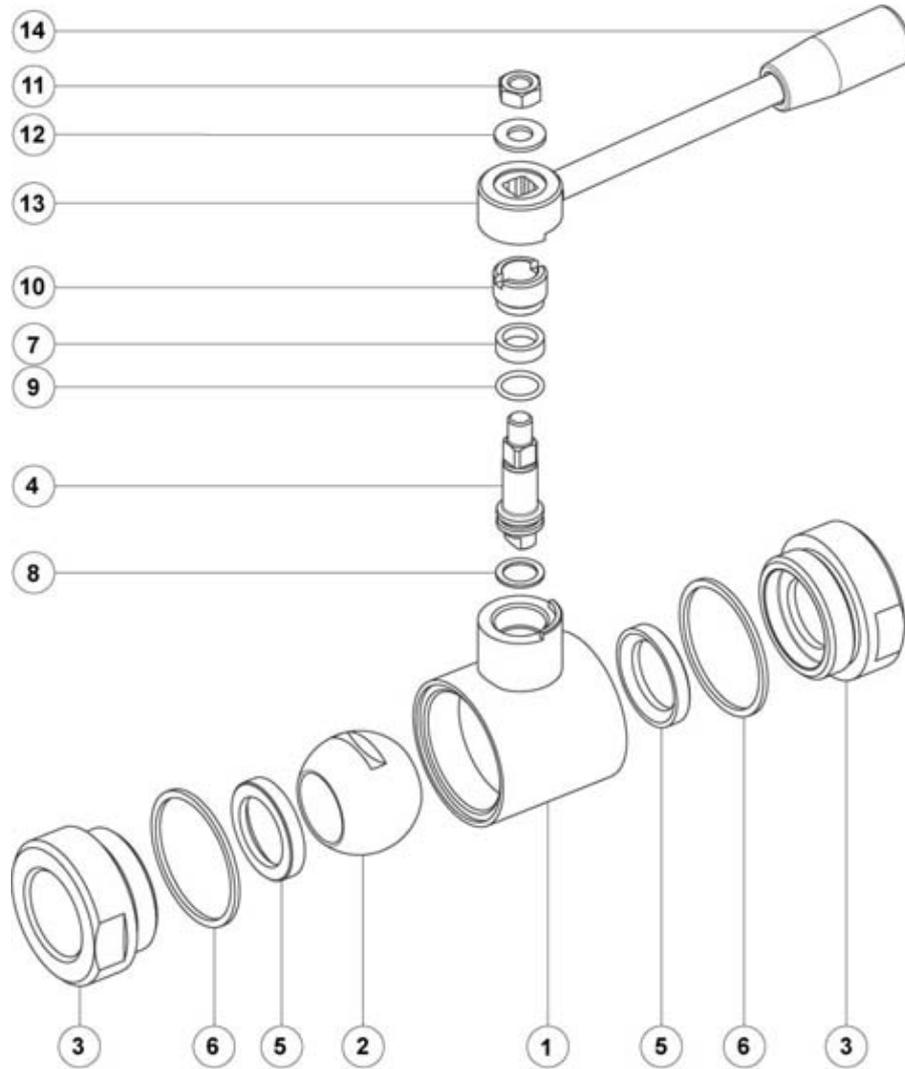

POS.	DENOMINATION	PCS	MAT.
1	Body	1	AISI 316L
2	Ball	1	AISI 316L
3	Sleeves	2	AISI 316L
4	Stem	1	AISI 316L
5	Ball seals	2	PTFE
6	Sleeve seals	2	PTFE
7	Stem seal	1	PTFE
8	Stem seal	1	PTFE
9	Stem OR-seal	1	FKM
10	Register ring	1	AISI 304L (303)
11	Nut	1	AISI 304L
12	Washer	1	AISI 304L
13	Lever	1	AISI 304L
14	Handle	1	Resina

