




100146

Two-way ball valve
 Drive: Inox lever
 Connection: SMS male/male
 Flow: full
 Material: Aisi 304L - 316L
 Measure: from DN 20 to DN 100
 Seals: virgin P.T.F.E.
 Operating temperature: -20°C +160°C
 Outer finish: polished

On request


Antistatic device ATEX (Directive 94/9/EC)

- DIN female connection
- Seals made of:
 P.T.F.E. with glass
 P.T.F.E. with carbographe
 High-molecular weight polyethylene

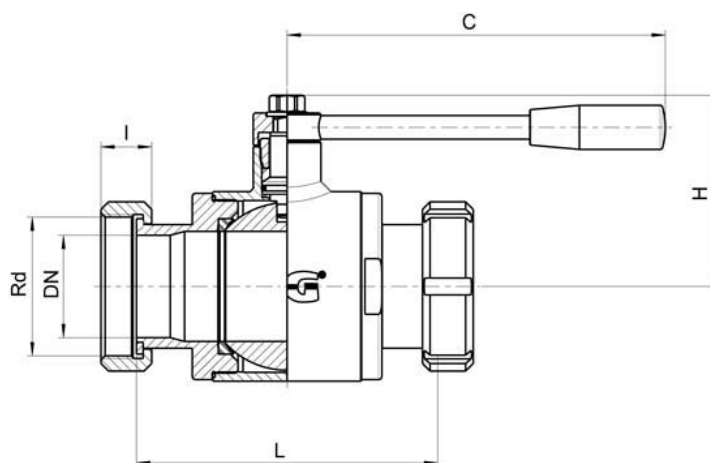

DN	SMS	Rd	L	I	C	H	PN	Kg	CODE AISI 304L	CODE AISI 316L
20*	25	40 x 1/6"	118	21	110	60	64	1,06	-	100146 62410
25	25	40 x 1/6"	124	21	160	65	40	1,55	100146 42610	100146 62610
40	38	60 x 1/6"	144	21	190	80	40	3,04	100146 43410	100146 63410
50	51	70 x 1/6"	156	22	190	90	25	4,54	100146 43810	100146 63810
65	63	85 x 1/6"	172	25	220	110	25	7,66	100146 44410	100146 64410
65*	76	98 x 1/6"	172	25	235	110	25	7,66	100146 44510	100146 64510
80	76	98 x 1/6"	194	30	285	130	25	10,8	100146 44810	100146 64810
100	104	125 x 1/4"	206	31	310	150	25	17,26	100146 45410	100146 65410
100	101	132 x 1/6"	206	31	310	150	25	17,26	100146 45510	100146 65510

* REDUCED FLOW

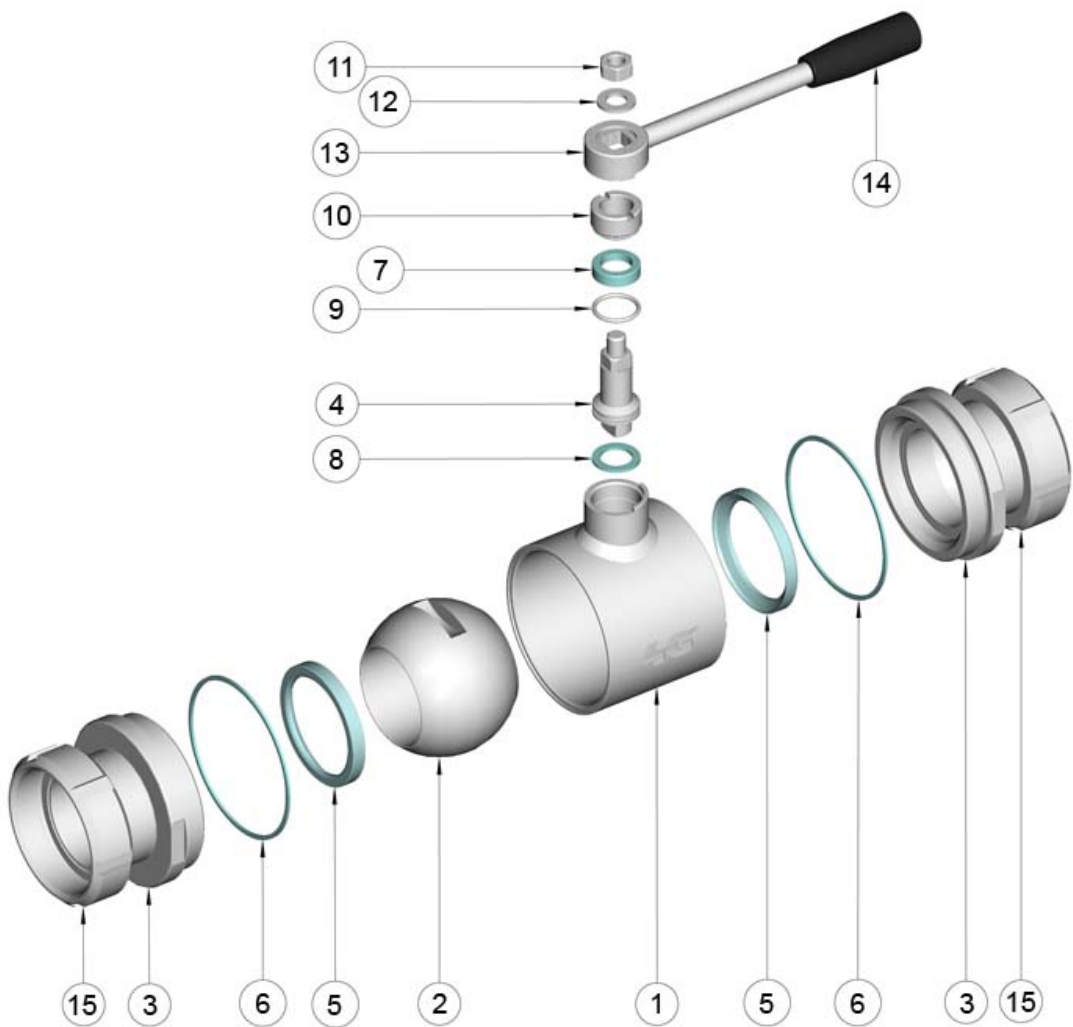

POS.	DENOMINATION	PCS	MAT.
1	Body	1	AISI 304L - 316L
2	Ball	1	AISI 304L - 316L
3	Sleeves	2	AISI 304L - 316L
4	Stem	1	AISI 304L - 316L
5	Ball seals	2	PTFE
6	Sleeve seals	2	PTFE
7	Stem seal	1	PTFE
8	Stem seal	1	PTFE
9	Stem OR-seal	1	FKM
10	Register ring	1	AISI 304L (303)
11	Nut	1	AISI 304L
12	Washer	1	AISI 304L
13	Lever	1	AISI 304L
14	Handle	1	Resina
15	Stop ring	2	AISI 304L

