

COMPRESSOR

Displacement (cm ³)	9.93
Diameter (mm)	25.4
Stroke (mm)	19.62
Net Weight (Kg)	11
Oil type	ISO VG 19 ESTER
Oil charge (cm ³)	445

MOTOR

Approximate Power (CV)	1/4
Voltage/Frequency (V/Hz)	220V 50Hz
Voltage range (V)	187-264
Code	62.011
Type	RSIR
Phase number	1 PH
Locked rotor current (A)	14.0
Main W. resist. at 25°C (Ω)	7.75
Start W. resist. at 25°C (Ω)	20.39

APPLICATION

Application	Low back pressure
Refrigerant	R134a
Evaporating (°C)	-35 to -10
Expansion	Capillar
Comp. cooling	Static
Max. ambient temp. (°C)	43

NOMINAL PERFORMANCE


	CYCLE A	CYCLE B
Cooling capacity (kcal/h)	150	205
Input power (W)	189	200
EER (kcal/Wh)	0.79	1.02
COP (W/W)	0.92	1.19
Current (A)	1.31	1.34

TEST CONDITIONS

Evaporating temp. (°C)	-25.0	-23.3
Condensing temp. (°C)	55.0	55.0
Liq.t. entering expan. (°C)	55.0	32.0
Ambient t. and return (°C)	32.0	32.0
Tens/Freq (V/Hz)	220V 50Hz	220V 50Hz


ELECTRICAL COMPONENTS

Relay	PTC 3003 - K100			
Nominal voltage (V)	200 - 240			
Resistanceμ	14,00			
Protector				
Current (A)	MRP336JZ	T0377	AF11FU	4TM330NFBY Y
Time check (seg)	9.1	12.0	9.4	14.4
Disc temp. (Open/Close) (°C)	7.5-14	7.5-14	7.5-14	5-15
	120.0 / 61.0	120.0 / 62.0	120.0 / 62.0	120.0 / 61.0

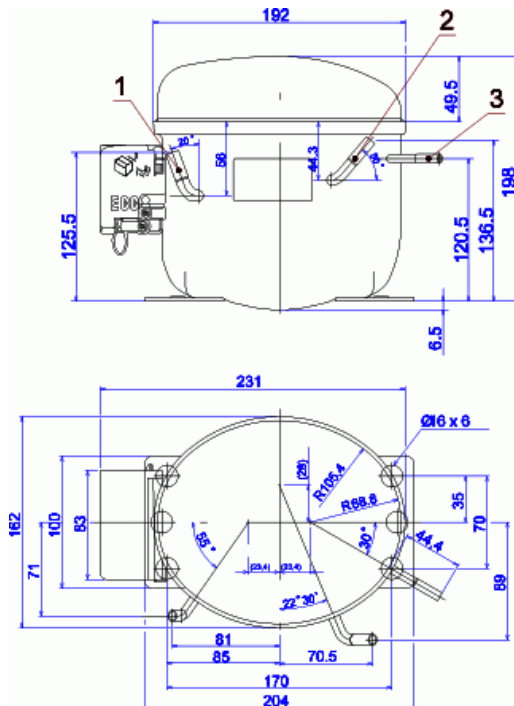DIMENSIONS AND ELECTRICAL DIAGRAM


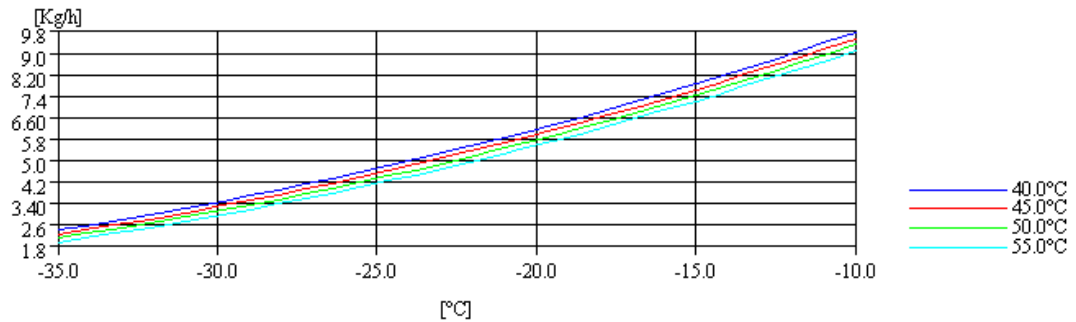
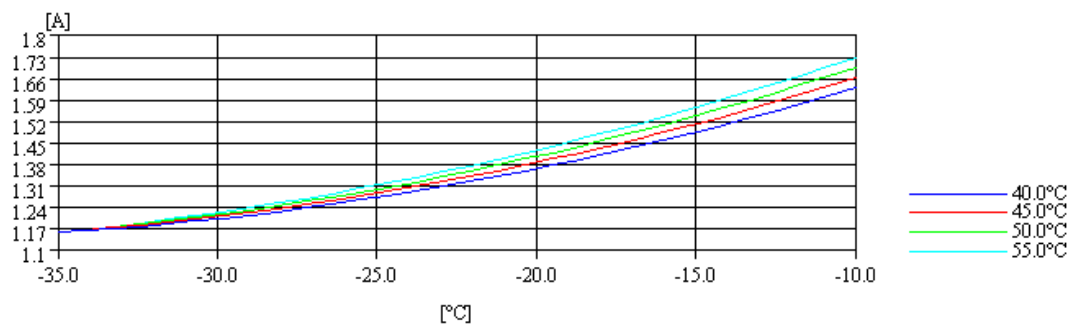
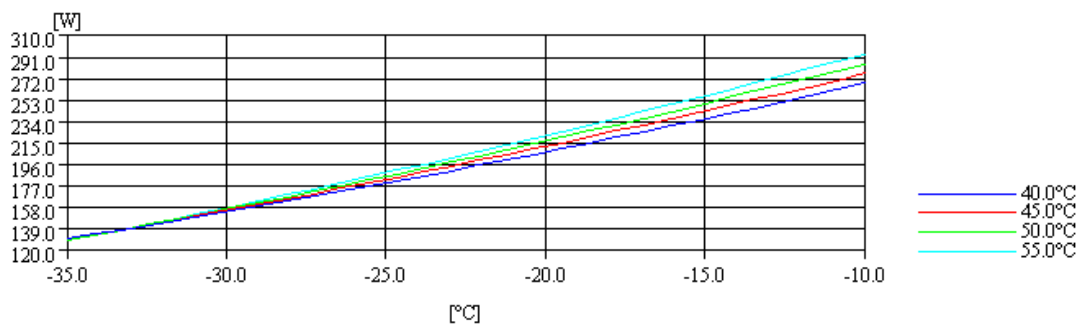
	DESIGNATION	INTERNAL DIAM. (MM)
1	Suction/Service	6.5
2	Service/Suction	6.5
3	Discharge	4.9

RSIR

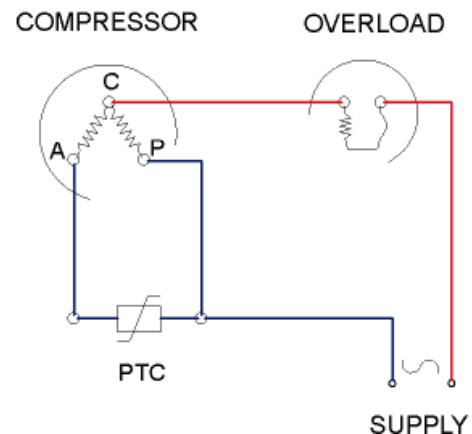

TEST CONDITIONS

Voltage/frequency	220V 50Hz
Ambient t. and return	32 °C
Liq.t. entering expan.	Subcooling at 32 °C

MASS FLOW

INTENSITY

CONSUMPTION

COOLING CAPACITY
