



COLLECTION 2018
**SOLIDE
CLICK**

ONE
FLOR
EUROPE



SOLIDE CLICK : The ideal solution for renovation

- + Only 4.5mm and 6mm thick. **No heavy work required**
- + **Direct installation over ceramic possible.** Little or no subfloor preparation required
- + No need for acclimatisation prior installation
- + **Quick and easy to install** thanks to the fold-down vertical click system
- + Outstanding lock strength for **a more durable floor**
- + **Resistant** to scuff, scratches and stains
- + Integrated acoustic pad for **high sound reduction** (21dB / 22dB)
- + **Excellent dimensional stability** allowing installation in areas with direct sun rays exposure, such as conservatories
- + **No extra expansion gap required** up to 400m² (20m x 20m)
- + Suitable for **wet rooms**
- + Suitable for **floor heating**
- + 100% phthalate free
- + 100% recyclable





*Your new interior
decoration **in one click!***

SOLIDE CLICK**30**

The ideal renovation solution for your projects.

New generation of rigid & acoustic Click Luxury Vinyl Tiles (Thickness: 4.5mm – Wear-layer: 0.30mm – Sound reduction: 21dB)



SOLIDE CLICK**55**


Designed to be the best.

New generation of rigid & acoustic Click Luxury Vinyl Tiles (Thickness: 6.0mm – Wear-layer: 0.55mm – Sound reduction: 22dB)

*A professional quality for a more
durable good-looking floor.*




Origin Concrete Natural
OFR-030-001 | 4572 x 9144 mm

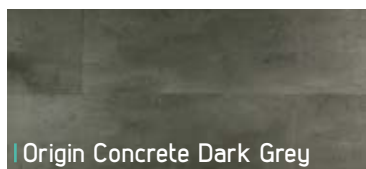

Origin Concrete Dark Grey
OFR-030-002 | 4572 x 9144 mm



Heritage Oak Natural
OFR-030-003 | 1778 x 12192 mm

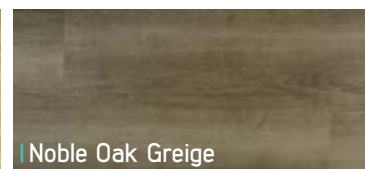


Noble Oak Greige
OFR-030-004 | 1778 x 12192 mm



Authentic Oak Natural
OFR-030-006 | 1778 x 12192 mm




Pure Oak Natural Light
OFR-030-007 | 1778 x 12192 mm

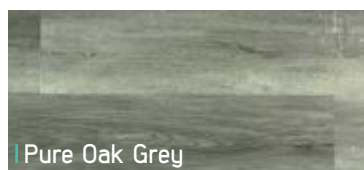

Pure Oak Grey
OFR-030-008 | 1778 x 12192 mm



Prestige Oak Natural
OFR-030-009 | 1778 x 12192 mm

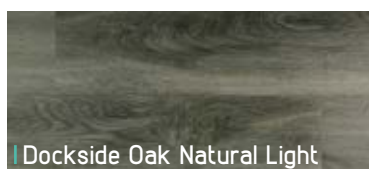


Dockside Oak Natural Light
OFR-030-011 | 1778 x 12192 mm





Sea Oak White
OFR-030-012 | 1778 x 12192 mm



Traditional Oak Greige
OFR-030-013 | 1778 x 12192 mm

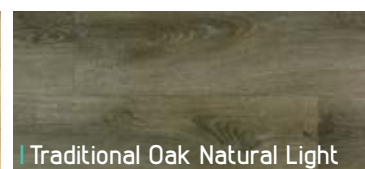

Traditional Oak Natural Light
OFR-030-014 | 1778 x 12192 mm

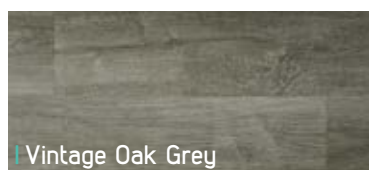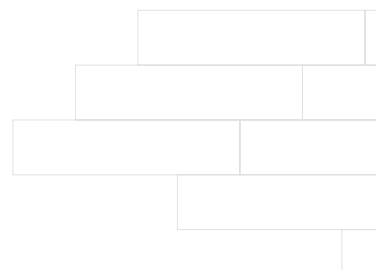


Vintage Oak Grey
OFR-055-001 | 185 x 1212 mm



Forest Oak Natural Light
OFR-055-002 | 185 x 1212 mm




Mountain Oak Greige
OFR-055-003 | 185 x 1212 mm

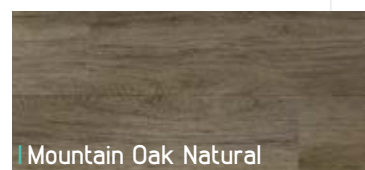

Mountain Oak Natural
OFR-055-004 | 185 x 1212 mm




Rustic Oak Greige
OFR-055-006 | 185 x 1212 mm

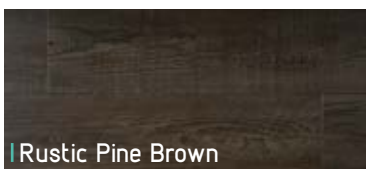

Rustic Pine Brown
OFR-055-007 | 185 x 1212 mm



Rustic Pine White
OFR-055-008 | 185 x 1212 mm

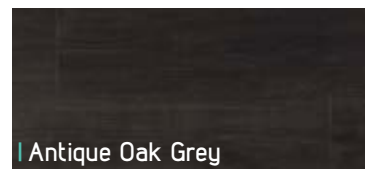

Antique Oak Grey
OFR-055-009 | 185 x 1212 mm




Modern Oak Natural
OFR-055-011 | 185 x 1212 mm




Modern Oak Greige
OFR-055-012 | 185 x 1212 mm




Modern Oak White
OFR-055-013 | 185 x 1212 mm

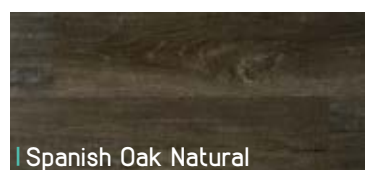


Spanish Oak Natural
OFR-055-014 | 185 x 1212 mm

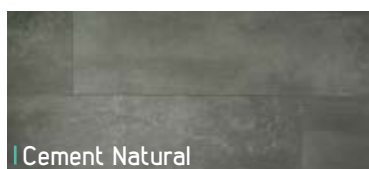

Cement Natural
OFR-055-016 | 462 x 925 mm

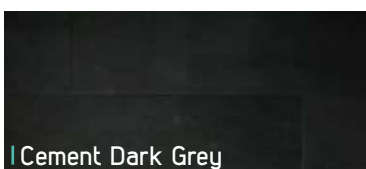

Cement Dark Grey
OFR-055-017 | 462 x 925 mm

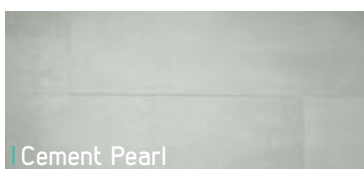


Cement Pearl
OFR-055-018 | 462 x 925 mm




RIGID55 XL




Chêne Fumé
RECXL553126 | 225 x 1524 mm

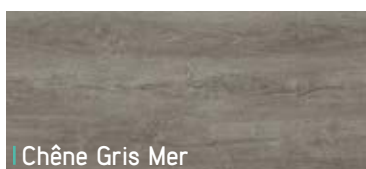

Chêne Gris Mer
RECXL553127 | 225 x 1524 mm

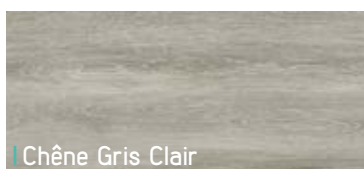

Chêne Gris Clair
RECXL553672 | 225 x 1524 mm

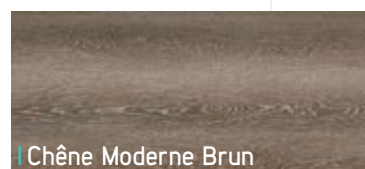

Chêne Moderne Brun
RECXL55400A1 | 225 x 1524 mm

PRODUCTS BENEFITS

Royal Oak Natural

OFR-030-005 | 1778 x 12192 mm

Manor Oak Natural Dark

OFR-030-010 | 1778 x 12192 mm

Mountain Oak Grey

OFR-055-005 | 185 x 1212 mm

Antique Oak Light Natural

OFR-055-010 | 185 x 1212 mm

Spanish Oak Natural Light

OFR-055-015 | 185 x 1212 mm



+ Direct installation over ceramic possible



+ Quick and easy to install thanks to the fold-down vertical click system



+ Integrated acoustic pad for high sound reduction



+ Excellent dimensional stability allowing installation in areas with direct sun rays exposure

+ No expansion gap required up to 400m²



Quick & easy fold-down click system



Outstanding lock strength



Suitable for floor heating



100% Recyclable



Phthalate free



Suitable for wet rooms



Total thickness Solide Click 30



Wear-layer Solide Click 30



Warranty Solide Click 30



Total thickness Solide Click 55



Wear-layer Solide Click 55



Warranty Solide Click 55



ONEFLOR EUROPE

Doorniksestraat 63 bus 3 - B-8500 Kortrijk
Tel : +32 56 41 06 04
Email : info@oneflor-europe.com
www.oneflor-europe.com

