


RID 800 E-SERIES S

DIESEL GENERATOR SET 800 KVA

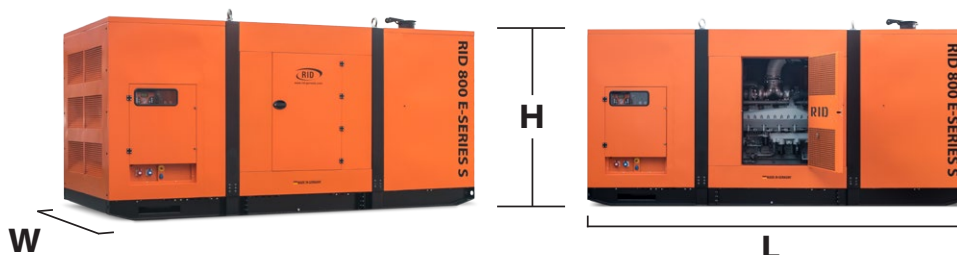

POWER RATING

OUTPUT RATINGS		PRIME	STANDBY
Power	kVA kW	800 640	880 704
Current	A	1150	1265
Voltage	V	230 / 400	230 / 400
Frequency	Hz		50
Rated at power factor	cos φ		0,8

POWER RATING DESCRIPTION

Prime Rating

The ratings are applicable for supplying continuous electrical power (at variable load) in lieu of commercially purchased power. There is no limitation to the annual hours of operation and this model can supply 10% overload power for 1 hour in 12 hours.

Standby Rating

The ratings are applicable for supplying continuous electrical power (at variable load) in the event of a utility power failure. No overload is permitted on these ratings. The alternator on this model is peak continuous rated (as defined in ISO 8528-3).

PRODUCT OVERVIEW

RATINGS DATA	
Order number Generator	713173
Alternator Model	Linz PRO35M F/4
Engine Type	MITSUBISHI S12A2-PTA
Generator type	synchronous
Protection class	IP 23
Control Panel	RID 1000 A

DIMENSIONS AND WEIGHTS

LENGTH (L)	WIDTH (W)	HEIGHT (H)	WEIGHT	TANK CAPACITY
5300 mm	2450 mm	2700 mm	10050 kg	1265 l

NOISE LEVEL

1 METER	4 METER	7 METER	10 METER
79 dB(A)	75 dB(A)	71 dB(A)	69 dB(A)

RID 800 E-SERIES S

DIESEL GENERATOR SET 800 KVA



ENGINE TECHNICAL DATA

ENGINE TECHNICAL DATA		PRIME	STANDBY
Engine output	kW	679	746
Engine type	MITSUBISHI S12A2-PTA		
Engine size	12-Cylinder; V-Type		
Injection system	Bosch P Type x2		
Rotational-speed range	rpm	1500	
Bore Stroke	mm	150 160	
Cooling system	water + air		
Speed regulation	electrical		
Compression ratio	14,5:1		
Displacement	l	33,93	
Engine w/o cooling system	kg	3620	

FUEL SYSTEM

POWER STANDARD		25%	50%	75%	100%
Fuel consumption PRIME	l/h	-	-	125,5	166,2

EXHAUST SYSTEM

Silencer type	Industrial	
Max. exhaust back pressure	mbar	58,84
Exhaust gas flow	m ³ /h	9240

LUBRICATION SYSTEM

Oil type	RID 10W40	
Oil filter type	replaceable element	
Total oil volume	l	120

COOLING SYSTEM

Cooling system	water + air	
Cooling system capacity (Engine)	l	100
Fan power consumption	kW	30
Cooling air flow	m ³ /h	68400

AIR SYSTEM

Air Filter Type	replaceable Element	
Combustion air volume	m ³ /h	3480
max. intake depression	mbar	39,23

RID 800 E-SERIES S

DIESEL GENERATOR SET 800 KVA



ALTERNATOR DATA

Alternator Model	Linz PRO35L H/4	
Generator type	synchronous	
Insulation Class	H	
Regulation Type	AVR	
Control System	self excited	
Execution	brushless	
Protection class	IP 23	
Stator Winding	Double layer with auxiliary winding	
Rotor Winding	I	with damping cage
Winding Pitch	2/3	
THD at full load	<3%	
Overspeed	rpm	2250
Air Flow Requirement	m ³ /h	3270
References	EN60034-1	ISO8528-3 EN55011

ALTERNATOR PERFORMANCE DATA

VOLTAGE SERIES STAR, V	RATED POWER (125°C/40°C), KVA KW	X _d	X' _d	X'' _d
380 220	800 640	372 %	19,4 %	13,3 %
400 230	800 640	336 %	17,5 %	12,0 %
415 240	790 632	306 %	16,1 %	11,0 %
440 254	730 584	253 %	13,2 %	9,0 %

CERTIFICATIONS AND NORMS

EN60034-1	ISO8528-3	EN55011	Outdoor Noise Equipment Directive 2000/14/EC
-----------	-----------	---------	--

RID 800 E-SERIES S

DIESEL GENERATOR SET 800 KVA



CONTROL PANEL

~ RID 1000 A ~

CONTROLLER FUNCTIONS

FUNCTIONS	RANGES, VALUES	
operating modes	automatic, manual, test and remote	available
mains control with limits	voltage, frequency, phase sequence	available
generator control with limits	voltage, frequency, power, phase sequence.	available
engine control with limits	start, stop, shutdown by alarms	available
power control	current, kW, kVA, kVA _r , power factor	available
statistic data mains	voltage, frequency and current	available
statistic data generator	voltage, frequency and current	available
fuel level control	in % and in liters	available
fuel consumption control and history	in l/h	available
working hours per day	in h	available
service hours	in h	available
battery service	in h	available
events log with time and date	255 events	available
alarm list programming	77 alarms	available
protocols	GSM, Ethernet, Modbus, Canbus, RID protocol	available

REMOTE MONITORING FUNCTIONS

mains voltage L1, L2, L3	in V, AC	available	engine temperature	in °C,	optional
generator voltage L1, L2, L3	in V, AC	available	enviroment temperature	in °C,	optional
genset battery voltage DC	in V, DC	available	generator run hours	in h,	available
mains power total	in kW,	available	generator maintanace hours	in h,	available
generator power total	in kW,	available	fuel level	in L,	available
mains frequency	in Hz	available	load on mains	indication	available
generator frequency	in Hz	available	load on generator	indication	available
current L1, L2, L3	in A,	available	mains supply	indication	available
power L1, L2, L3	in kW,	available	generator supply	indication	available

SPECIFIC ALARMS

GENSET DOOR OPEN	FUEL TANK OPEN	AIR FILTER CLOGGING	FIRE ALARM
optional	optional	optional	optional