


RID 1300 E-SERIES S

DIESEL GENERATOR SET 1300 KVA

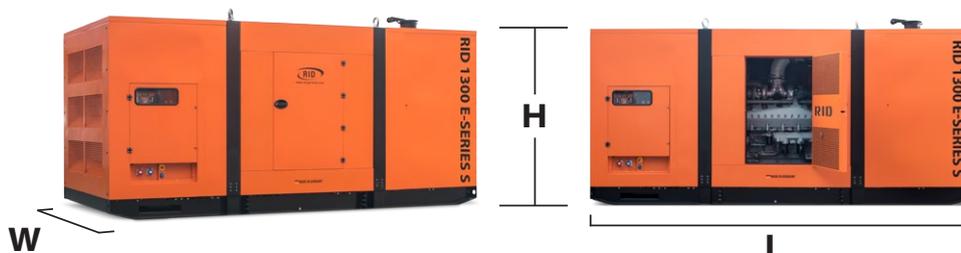

POWER RATING

OUTPUT RATINGS		PRIME	STANDBY
Power	kVA kW	1300 1040	1430 1144
Current	A	1878	2066
Voltage	V	230 / 400	230 / 400
Frequency	Hz		50
Rated at power factor	cos φ		0,8

POWER RATING DESCRIPTION

Prime Rating

The ratings are applicable for supplying continuous electrical power (at variable load) in lieu of commercially purchased power. There is no limitation to the annual hours of operation and this model can supply 10% overload power for 1 hour in 12 hours.

Standby Rating

The ratings are applicable for supplying continuous electrical power (at variable load) in the event of a utility power failure. No overload is permitted on these ratings. The alternator on this model is peak continuous rated (as defined in ISO 8528-3).

PRODUCT OVERVIEW

RATINGS DATA	
Order number Generator	713179
Alternator Model	MECC ALTE ECO 43-2LN/4
Engine Type	MITSUBISHI - S12R-PTA
Generator type	synchronous
Protection class	IP 23
Control Panel	RID 1000 A

DIMENSIONS AND WEIGHTS

LENGTH (L)	WIDTH (W)	HEIGHT (H)	WEIGHT	TANK CAPACITY
6100 mm	2700 mm	2900 mm	12900 kg	1500 l

NOISE LEVEL

1 METER	4 METER	7 METER	10 METER
80,5 dB(A)	75,5 dB(A)	72 dB(A)	70 dB(A)

RID 1300 E-SERIES S

DIESEL GENERATOR SET 1300 KVA



ENGINE TECHNICAL DATA

ENGINE TECHNICAL DATA		PRIME	STANDBY
Engine output	kW	1110	1220
Engine type		MITSUBISHI - S12R-PTA	
Engine size		12-Cylinder	
Injection system		Mitsubishi PS6 Type × 2	
Rotational-speed range	rpm	1500	
Bore Stroke	mm	170 180	
Cooling system		water + air	
Speed regulation		electrical	
Compression ratio		14.0:1	
Displacement	l	49,3	
Engine w/o cooling system	kg	5350	

FUEL SYSTEM

POWER STANDARD		25%	50%	75%	100%
Fuel consumption PRIME	l/h	-	146	201,7	261,3

EXHAUST SYSTEM

Silencer type		Industrial
Max. exhaust back pressure	mbar	58,8
Exhaust gas flow	m ³ /h	14100

LUBRICATION SYSTEM

Oil type		RID 10W40
Oil filter type		replaceable element
Total oil volume	l	180

COOLING SYSTEM

Cooling system		water + air
Cooling system capacity	l	125
Fan power consumption	kW	30
Cooling Air Flow	m ³ /h	99000

AIR SYSTEM

Air Filter Type		replaceable Element
Combustion air volume	m ³ /h	5340
max. intake depression	mbar	39,2

RID 1300 E-SERIES S

DIESEL GENERATOR SET 1300 KVA



ALTERNATOR DATA

Alternator Model	MECC ALTE ECO 43-2LN/4	
Generator type	synchronous	
Insulation Class	H	
Regulation Type	AVR	
Execution	brushless	
Protection class	IP 21	
Stator Winding	12 ends	
Rotor Winding	I	with damping cage
THD at full load	LL/LN %	1,5 / 1,5
Overspeed	rpm	2250
Air Flow Requirement	m ³ /h	5400
Radio interference	EN61000-6-3, EN61000-6-2. For others standards apply to factory	

ALTERNATOR PERFORMANCE DATA

VOLTAGE SERIES STAR, V	RATED POWER (125°C/40°C), KVA KW	X _d	X' _d	X'' _d
380	1300 1040	416,6 %	19,7 %	9,3 %
400	1300 1040	376 %	17,8 %	8,4 %
415	1300 1040	349,3 %	16,5 %	7,8 %
440	1235 988	295,2 %	14 %	6,6 %

CERTIFICATIONS AND NORMS

EN60034-1	ISO8528-3	EN55011	Outdoor Noise Equipment Directive 2000/14/EC
-----------	-----------	---------	----------------------------------------------

RID 1300 E-SERIES S

DIESEL GENERATOR SET 1300 KVA



CONTROL PANEL

~ RID 1000 A ~

CONTROLLER FUNCTIONS

FUNCTIONS	RANGES, VALUES	
operating modes	automatic, manual, test and remote	available
mains control with limits	voltage, frequency, phase sequence	available
generator control with limits	voltage, frequency, power, phase sequence.	available
engine control with limits	start, stop, shutdown by alarms	available
power control	current, kW, kVA, kVA _r , power factor	available
statistic data mains	voltage, frequency and current	available
statistic data generator	voltage, frequency and current	available
fuel level control	in % and in liters	available
fuel consumption control and history	in l/h	available
working hours per day	in h	available
service hours	in h	available
battery service	in h	available
events log with time and date	255 events	available
alarm list programming	77 alarms	available
protocols	GSM, Ethernet, Modbus, Canbus, RID protocol	available

REMOTE MONITORING FUNCTIONS

mains voltage L1, L2, L3	in V, AC	available	engine temperature	in °C,	optional
generator voltage L1, L2, L3	in V, AC	available	enviroment temperature	in °C,	optional
genset battery voltage DC	in V, DC	available	generator run hours	in h,	available
mains power total	in kW,	available	generator maintanace hours	in h,	available
generator power total	in kW,	available	fuel level	in L,	available
mains frequency	in Hz	available	load on mains	indication	available
generator frequency	in Hz	available	load on generator	indication	available
current L1, L2, L3	in A,	available	mains supply	indication	available
power L1, L2, L3	in kW,	available	generator supply	indication	available

SPECIFIC ALARMS

GENSET DOOR OPEN	FUEL TANK OPEN	AIR FILTER CLOGGING	FIRE ALARM
optional	optional	optional	optional