


Mono Poly

LP156*156-M-72

Rated Power 355-375W

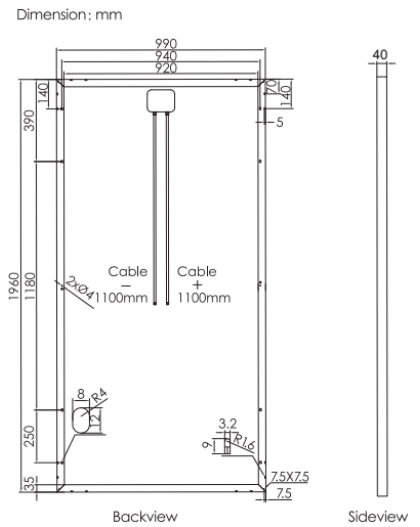


Product Series	LP156*156-M-72				
Power	355W	360W	365W	370W	375W
Open Circuit Voltage	47.46V	47.67V	47.88V	48.09V	48.30V
Short Circuit Current	9.68A	9.76A	9.84A	9.92A	10.04A
Maximum Power Voltage	38.80V	39.00V	39.20V	39.40V	39.60V
Maximum Power Current	9.15A	9.24A	9.31A	9.39A	9.47A
Module Efficiency	18.3%	18.6%	18.8%	19.1%	19.3%



•10-YEAR 90% Maximum Output

•25-YEAR 80% Maximum Output

Product Characteristics			
Weight	21.5kg	Junction Box	IP67
Module Size	1960*990*40mm	Frame	Aluminum Alloy
Cell Amount	72 pcs	Cable	4mm ² ,Length1100mm
Cell Size	156.75*156.75mm	Connection	(Compatible with)MC4
Maximum System Voltage	1000/1500V	Application Level	Class A



- Salt Spray Certificate
- IEC61701 (Salt Mist Corrosion Test)

Packing Configuration			
Modules/Pallet	26 pieces	Modules/40' container	624 pieces
Packing Description	24 Pallets, Total=26 X 24=624		

- TUV PID Certificate


- TUV Certificate

Temperature Characteristics		Maximum Rating	
NOCT	45±2°C	Output Tolerance	0~+3%W
Temp Coefficient of ISC	+0.06%/°C	Operating Temperature	-40°C ~+85°C
Temp Coefficient of VOC	-0.30%/°C	Wind Load/Snow Load	2400pa/5400pa
Temp Coefficient of Pmax	-0.40%/°C	Fuse Current	15A



•Output 355W-375W

Current - Voltage Curve at Various Light Levels

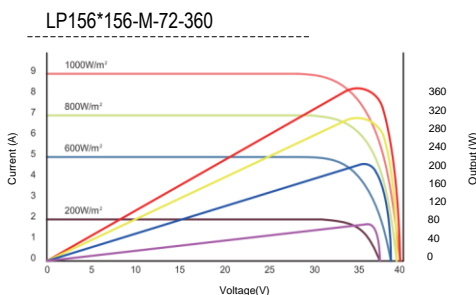

Output at Various Temperatures

