

## Model: FDT67TM4-16 - 160 kVA FPT Industrial Series



<b>50</b> HZ	50 Hz		Cooling System: Water
<b>T</b>	Three Phase		Diesel



Foto Indicativa / Indicative Picture

### Features

Generating Set Model	FDT67TM4-16
Power in PRP (kVA)	160
Power in LTP (kVA)	176
Engine Model	NEF 67 TM4
Engine Brand	FPT
Alimentation	Diesel
Cooling System	Water
Displacement (cc)	6700
Fuel Tank Capacity(lt)	120.00
Battery Capacity	1x155
Automatic Control Panel	A2G
Manual Control Panel	QMA2
Sound Proof Canopy	NK6
Frequence	50 Hz
Voltage	400/230 V + N
Rounds per Minute	1500

### Standards Applied

Coelmo Generating Sets are CE marked and comply with the following regulations:  
(Environmental conditions 1.000 mbar, 25C° , 30% relative humidity. Power referring to ISO 3046)

- Power: ISO 8528
- Directive Machinery : 2006/42/CE - 89/392CEE - 98/37/CE
- Low Voltage : 2006/95/CE - 73/23/CEE - 93/68/CEE
- Electromagnetic Compatibility : 2004/108/CE - 89/336/CEE - 93/68/CEE
- Emissions for non-road engines : 2002/88/CE - 97/68/CE (\*)
- Acoustic emission : 2005/88/CE - 2000/14/CE (\*\*)

\* For non-stationary use only

\*\* For Sound Proof Version Only

### Basic Configuration

- Fuel tank
- Starting battery
- High temperature engine thermostat
- Low pressure oil thrust meter
- Electrovalve engine
- Initial filling of fluids

### Documentation

- User's and maintenance handbook
- Electric schemes
- CE declaration
- Test report (on demand)

### Available Options

- 3 or 4 poles circuit breaker
- Relay and/or differential module
- Over sized integrated fuel tank
- Engine temperature sensor
- Oil pressure sensor
- Fuel level indicator float
- Automatic refill system
- Sound proof canopy
- Catalytic muffler
- Silenced muffler
- Electro manual control panel
- Automatic control panel
- Change over mains/generating set
- Slow speed trailer
- High speed trailer
- Remote alarm control board
- Commissioning

## Model: FDT67TM4-16 - 160 kVA FPT Industrial Series

### Engine

Diesel engine, four stroke water cooled. An efficient cooling system assures excellent performances in whichever site conditions. A low electric power/displacement ratio guarantees a full available power.

Model	NEF 67 TM4
Brand	FPT
Alimentation	Diesel
Number of Cylinders	6
Displacement (cc)	6700
HP at 50Hz	227
Speed Governor	Mechanical
Aspiration	TCA/A
Air Flow Ventilator (m3/h)	13680
Combustion Air Flow (m3/h)	586
Exhaust Gas Flow (m3/h)	1721
Maximum Exhaust Gas Temperature (°C)	497
Bore (mm)	104
Stroke (mm)	132
Oil cap (l)	12.00
Rounds Per Minute	1500
Consumption at 2/4 of the load (l/h)	18.00
Consumption at 3/4 of the load (l/h)	29.40
Consumption at 4/4 of load (l/h)	36.60

### Aspiration Type


NA	=	Natural Aspiration
TC	=	Turbo Compressor
TCA/A	=	Turbo Compressor Air/Air
W/A	=	Turbo Compressor Water/Air

### Alternator

Manufactured in accordance with international IEC 34-1 standards, self regulated, selfexcited, selfventilated, insulated in class "H", regulation accuracy (with load from 0 to 100%) of +/- 1%.

Number of Poles	4
Excitation	Brushless with electronic regulator
Number of Terminals	12
IP	23
Phase	Three Phase
Cos Phi	0.8
Performance	0.93
Voltage	400/230 V + N

### Dimensions

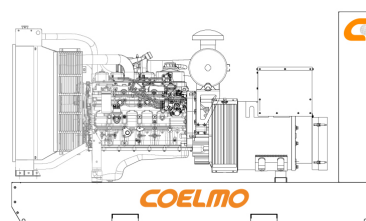

Version	Open	Soundproof
Length (mm)	2900	3400
Width (mm)	1100	1100
Height (mm)	1550	1800
Weight (kg)	1398	1860