

Serious. Solid. Impact.



PCP AIR RIFLES



Serious. Solid. Impact.

The Hatsan Difference

What sets Hatsan Airguns apart from the competition?



More Power

Even though FPS rates may look the same from brand to brand, that may not always be the case. Hatsan tests this rating using lead pellets, but most competitors use lighter aluminum alloy pellets. What this means for you is that a Hatsan airgun will deliver more knockdown power than an alloy-tested airgun with the same FPS rating.

Unique Features

All of our PCP airguns offer specialty features that come standard within our product line to provide shooters with a better experience, including the Quattro Trigger, TruGlo® fiber optics, patented "Anti-double pellet feed mechanism" preventing more than one pellet loading into barrel and "anti-knock system" preventing gas wastage when rifle is knocked or bounced.

Custom Designs

While other manufacturers work from widely used templates, all Hatsan designs are conceived and developed in-house. This means your Hatsan airgun is an original, not a reproduction.

Quality Control

Complete vertical integration ensures the high quality you expect from Hatsan. Every part of our airguns is produced right in our facilities to guarantee a well-made finished product. And only the highest-grade raw materials are used, including fine Turkish walnut and durable German steel.

Family Ownership

The company started in 1976 with one young man hoping to replicate an air dart gun in his parents' garage. Since then, Hatsan has become a popular brand in the international firearm and airgun market. And they've remained family-owned and -operated every step.



Serious. Solid. Impact.

AT44-10 TACT



- Manual & Auto Safety.
- Scope mount rail good for both 11 mm and 22 mm scope mounts
- 10-shot magazine (9-shot magazine in .25 /6.35mm caliber)
- Micro adjustable rear sight

- Quattro Trigger: 2-stage full adjustable match trigger for trigger travel and trigger load.
- Gold plated trigger blade



Telescopic stock can be removed, allowing the use with pistol grip only.

- Pre-Charged Pneumatic (PCP) side-lever action, multi shot air rifle.
- Fitted detachable telescopic stock. Telescopic stock can be removed, allowing the use with pistol grip only.
- Precision rifled choked barrel for accuracy, threaded for 1/2" UNF sound moderator & fitted muzzle cap.
- Available in .177 (4.5mm), .22 (5.5mm) and .25 (6.35mm) caliber.
- Ambidextrous & ergonomic design pistol grip synthetic stock
- Spare magazine carrying slot in the stock for 2 spare magazines
- 3 Picatinny accessory rails beneath and on the sides the forearm.
- Soft rubber inlays with checkering on grip and forearm for better control and feel.
- Elevation adjustable comb which can be easily adjusted by a coin.
- Detachable 10-shot rotary magazine in .177 (4.5mm) and .22 (5.5mm) calibers and 9-shot rotary magazine in 25 (6.35mm) caliber.
- Comes with 3 magazines
- Detachable steel air cylinder tube (180cc). Spare cylinders are available.
- Built-in pressure gauge on the air cylinder to monitor the cylinder pressure.
- Includes quick-fill nozzle & air cylinder discharging cap
- Dovetail groove receiver for both 11mm and 22mm scope mounts.
- Overall blued finish, black anodized receiver.
- Manual Safety & Auto Safety
- "Anti-double pellet feed" mechanism preventing more than one pellet loading into barrel.
- Patented anti-knock system to prevent gas wastage when rifle is knocked or bounced.
- Adjustable rear & front sight with Truglo fiber optics.
- Quattro Trigger: 2-stage full adjustable trigger for trigger travel and trigger load.
- Gold plated metal trigger & metal trigger guard.
- Fitted sling swivels
- Includes a sling & bipod.
- Long version (AT44-10 Tact Long) is available with 230cc air cylinder tube, 58cm barrel and 100fps (30m/s) more muzzle velocity.

Model	Caliber	Max. Muzzle Velocity (*)	Energy		Magazine Capacity	Air Tube Volume	Fill Pressure	Shots per fill	Stock	Overall Length		Barrel Length	Weight	Fiber Optic Sights Diameters	
			Joules	ft.lbs						Butt Shortened	Butt Extended			Rear Sight	Front Sight
AT44-10 Tact	4.5mm / .177cal	325m/s (1070fps)	30	22	10	180cc	200 BAR	80	Tactical Telescopic Stock / Adjustable Comb / Advanced Polymer Grip	885mm (34.8")	985mm (38.8")	495mm (19.4")	3.9kg (8.6lbs)	0.9mm (.035") green	1.5mm (.060") red
	5.5mm / .22cal	295m/s (970fps)	42	31	10	180cc	200 BAR	70							
	6.35mm / .25cal	265m/s (870fps)	46	34	9	180cc	200 BAR	60							
AT44-10 Tact Long	4.5mm / .177cal	355m/s (1170fps)	36	27	10	230cc	200 BAR	80	Tactical Telescopic Stock / Adjustable Comb / Advanced Polymer Grip	980mm (38.6")	1080mm (42.5")	585mm (23")	4.3kg (9.5lbs)	0.9mm (.035") green	1.5mm (.060") red
	5.5mm / .22cal	325m/s (1070fps)	51	38	10	230cc	200 BAR	70							
	6.35mm / .25cal	295m/s (970fps)	57	42	9	230cc	200 BAR	60							

* Above maximum muzzle velocity figures may differ depending on the pellet weight & shape.
 * The energy restriction of a particular country can be achieved by the reduction in the muzzle velocity. The above maximum velocity figures are obtained when there is no energy restriction on the air rifle and when measured at optimum pressure value in the air tube. As a nature of PCP air rifles the velocity starts low at maximum pressure level in the air tube, then starts to increase and gets to the maximum at optimum pressure value in the air tube; and then it starts to decrease again as the pressure in the air cylinder gets too low.



Fitted detachable telescopic stock. Stock can be shortened/extended by 10cm (4"). Elevation adjustable comb -easily adjusted by a coin.



AT-P2

Serious. Solid. Impact.

810fps POWER!

NEW



- 10- shot, manual loading, side lever action, pre-charged pneumatic (PCP) air pistol + carbine air rifle.
- Precision rifled choked barrel for accuracy, threaded for 1/2" UNF sound moderator & fitted muzzle cap.
- Available in .177 (4.5mm), .22 (5.5mm) and .25 (6.35mm) caliber.
- Ergonomic design synthetic grip.
- Detachable / adjustable tactical telescopic rifle stock conversion kit included.
- Detachable 10-shot rotary magazine in .177 (4.5mm) and .22 (5.5mm) calibers and 9-shot rotary magazine in 25 (6.35mm) caliber.
- Includes one additional magazine
- Detachable aluminum air cylinder tube (50cc). Spare cylinders are available.
- Built-in pressure gauge on the air cylinder to monitor the cylinder pressure.

- Includes quick-fill nozzle & air cylinder discharging cap
- Dovetail grooved receiver for both 11mm and 22mm scope mounts.
- Overall blued finish, black anodized receiver.
- Manual & Automatic Safety
- "Anti-double pellet feed" mechanism preventing more than one pellet loading into barrel.
- Patented anti-knock system to prevent gas wastage when rifle is knocked or bounced.
- Adjustable rear & front sight with Truglo fiber optics.
- Quattro Trigger: 2-stage fully adjustable match trigger for trigger travel and trigger load.
- Gold plated metal trigger
- Includes plastic case



Carrying case included.



Telescopic stock can be removed, allowing the use with pistol grip only.



Fitted detachable telescopic stock. Stock can be shortened/extended by 10cm (4"). Elevation adjustable comb -easily adjusted by a coin.

Model	Caliber	Max. Muzzle Velocity (*)	Energy (*)		Magazine Capacity	Air Tube Volume	Fill Pressure	Shots per fill	Stock	Overall Length		Barrel Length	Weight	Fiber Optic Sights Diameters	
			Joules	ft.lbs						Butt Shortened	Butt Extended			Rear Sight	Front Sight
AT-P2	4.5mm / .177cal	264m/s (870fps)	20	14.5	10	50cc	200 BAR	35	Tactical Telescopic Stock / Advanced Polymer Grip	640mm (25.2")	740mm (29.1")	265mm (10.4")	2.9kg (6.4lbs)	0.9mm (.035") green	1.5mm (.060") red
	5.5mm / .22cal	236m/s (780fps)	27	19.8	10	50cc	200 BAR	35							
	6.35mm / .25cal	255m/s (710fps)	30	22	9	50cc	200 BAR	35							

* Above maximum muzzle velocity figures may differ depending on the pellet weight & shape.
 * The energy restriction of a particular country can be achieved by the reduction in the muzzle velocity. The above maximum velocity figures are obtained when there is no energy restriction on the air rifle and when measured at optimum pressure value in the air tube. As a nature of PCP air rifles the velocity starts low at maximum pressure level in the air tube, then starts to increase and gets to the maximum at optimum pressure value in the air tube; and then it starts to decrease again as the pressure in the air cylinder gets too low.



AT-P1

Serious. Solid. Impact.

810fps POWER!

NEW



- 10- shot, manual loading, side lever action, pre-charged pneumatic (PCP) air pistol.
- Precision rifled choked barrel for accuracy, threaded for 1/2" UNF sound moderator & fitted muzzle cap.
- Available in .177 (4.5mm), .22 (5.5mm) and .25 (6.35mm) caliber.
- Ergonomic design synthetic grip. (left hand grip is available)
- Detachable 10-shot rotary magazine in .177 (4.5mm) and .22 (5.5mm) calibers and 9-shot rotary magazine in 25 (6.35mm) caliber.
- Includes one additional magazine
- Detachable aluminum air cylinder tube (50cc). Spare cylinders are available.
- Built-in pressure gauge on the air cylinder to monitor the cylinder pressure.

- Includes quick-fill nozzle & air cylinder discharging cap supplied in the box.
- Dovetail grooved receiver for both 11mm and 22mm scope mounts.
- Overall blued finish, black anodized receiver.
- Manual & Automatic Safety
- "Anti-double pellet feed" mechanism preventing more than one pellet loading into barrel.
- Patented anti-knock system to prevent gas wastage when rifle is knocked or bounced.
- Adjustable rear & front sight with Truglo fiber optics.
- Quattro Trigger: 2-stage fully adjustable match trigger for trigger travel and trigger load.
- Gold plated metal trigger
- Includes plastic case.



Right side view



- Side lever action
- Scope mount rail for both 11mm and 22mm mounts
- 10-shot magazine (9-shot in .25/6.35mm caliber)
- Micro adjustable rear sight with Truglo fiber optics
- Quattro Trigger: 2-stage fully adjustable match trigger for trigger travel and trigger load.
- Gold plated metal trigger



TRUGLO Adjustable front sight

- 1/2" UNF threaded muzzle and fitted muzzle cap.
- Detachable 50cc air cylinder for 200 bar fill pressure with built in pressure gauge.

Model	Caliber	Max. Muzzle Velocity (*)	Energy (*)		Magazine Capacity	Air Tube Volume	Fill Pressure	Shots per fill	Stock	Overall Length	Barrel Length	Weight	Fiber Optic Sights Diameters	
			Joules	ft.lbs									Rear Sight	Front Sight
AT-P1	4.5mm / .177cal	264m/s (870fps)	20	14.5	10	50cc	200 BAR	35	Advanced polymer	415mm (16.3")	265mm (10.4")	2.05kg (4.5lbs)	0.9mm (.035") green	1.5mm (.060") red
	5.5mm / .22cal	236m/s (780fps)	27	19.8	10	50cc	200 BAR	35						
	6.35mm / .25cal	255m/s (710fps)	30	22	9	50cc	200 BAR	35						

* Above maximum muzzle velocity figures may differ depending on the pellet weight & shape.
 * The energy restriction of a particular country can be achieved by the reduction in the muzzle velocity. The above maximum velocity figures are obtained when there is no energy restriction on the air rifle and when measured at optimum pressure value in the air tube. As a nature of PCP air rifles the velocity starts low at maximum pressure level in the air tube, then starts to increase and gets to the maximum at optimum pressure value in the air tube; and then it starts to decrease again as the pressure in the air cylinder gets too low.



GALATIAN I

Serious. Solid. Impact.

NEW

1190fps POWER!



QUATTRO TRIGGER



Carrying case included.



Galatian I-Carbine

Shrouded shorter (carbine) barrel version with fixed sound moderator. (50-60fps less velocity due to carbine barrel)



Sling included



- Removable rear sight.
- Trigger lock included.



- Side lever action
- Cocking indicator
- Dovetail grooved receiver for 11mm or 22mm scope mounts
- Quattro trigger
- Micro adjustable rear sight with Truglo fiber optics.
- Detachable 16-shot magazine in .177 caliber, 14-shot magazine in .22 and 13-shot magazine in .25

- Manual loading, side lever action, pre-charged pneumatic (PCP) air rifle.
- Precision rifled choked barrel for accuracy, threaded for 1/2" UNF sound moderator & fitted muzzle cap.
- Available in .177 (4.5mm), .22 (5.5mm) and .25 (6.35mm) caliber.
- Detachable 16-shot magazine in .177 (4.5mm) caliber, 14-shot magazine in .22 (5.5mm) and 13-shot magazine in .25 (6.35mm) caliber.
- Ambidextrous & ergonomic design walnut stock with thumbhole.
- Checkering on grip & forend for better control & feel.
- Elevation adjustable comb which can be easily adjusted by a coin.
- Stock length of pull, elevation & fit angle adjustable rubber butt pad.
- Spare magazine carrying slot in the stock for 1 spare magazine.
- Detachable aluminum air cylinder tube (255cc). Spare cylinders are available.
- Rotating dust cover for the air filling hole on air cylinder.
- Built-in pressure gauge on the air cylinder to monitor the cylinder pressure.
- Includes quick-fill nozzle & air cylinder discharging cap.
- Dovetail groove receiver for both 11mm and 22mm scope mounts.
- Cocking indicator.
- Aircraft aluminum alloy receiver in white nickel finish and with engraving
- Overall blued finish on air tube and barrel.
- Manual Safety.
- "Anti-double pellet feed" mechanism preventing more than one pellet loading into barrel.
- Patented anti-knock system to prevent gas wastage when rifle is knocked or bounced.
- Detachable & adjustable rear sight with Truglo fiber optics.
- Elevation adjustable front sight with Truglo fiber optics.
- Quattro Trigger: 2-stage full adjustable match trigger for trigger travel and trigger load.
- Gold plated metal trigger & metal trigger guard.
- Fitted sling swivels.
- Hard case, sling, and a trigger lock included.
- Spare air cylinders with regulator are available.

Model	Caliber	Max. Muzzle Velocity (*)	Energy		Magazine Capacity	Air Tube Volume	Fill Pressure	Shots per fill	Stock	Overall Length	Barrel Length	Weight	Fiber Optic Sights Diameters	
			Joules	ft.lbs									Rear Sight	Front Sight
Galatian I	4.5mm / .177cal	360m/s (1190fps)	37	27	16	255cc	200 BAR	80	High Quality Turkish Walnut Thumbhole, Monte Carlo Cheekpiece, Adjustable Butt Pad & Adjustable Comb	1075mm (42.3")	585mm (23")	4kg (8.8lbs)	0.9mm (.035") green	1.5mm (.060") red
	5.5mm / .22cal	333m/s (1100fps)	53	39	14	255cc	200 BAR	70						
	6.35mm / .25cal	303m/s (1000fps)	60	44	13	255cc	200 BAR	60						
Galatian I-Carbine	4.5mm / .177cal	342m/s (1130fps)	33	24	16	255cc	200 BAR	80	High Quality Turkish Walnut Thumbhole, Monte Carlo Cheekpiece, Adjustable Butt Pad & Adjustable Comb	1100mm (43.3")	450mm (17.7")	3.9kg (8.6lbs)	No sights	No sights
	5.5mm / .22cal	318m/s (1050fps)	49	36	14	255cc	200 BAR	70						
	6.35mm / .25cal	287m/s (950fps)	54	40	13	255cc	200 BAR	60						

* Above maximum muzzle velocity figures may differ depending on the pellet weight & shape.

* The energy restriction of a particular country can be achieved by the reduction in the muzzle velocity. The above maximum velocity figures are obtained when there is no energy restriction on the air rifle and when measured at optimum pressure value in the air tube. As a nature of PCP air rifles the velocity starts low at maximum pressure level in the air tube, then starts to increase and gets to the maximum at optimum pressure value in the air tube; and then it starts to decrease again as the pressure in the air cylinder gets too low.



- Elevation adjustable comb which can be easily adjusted by a coin. Stock length of pull, elevation & fit angle adjustable rubber butt pad.
- Spare magazine carrying slot in the stock



- Quattro trigger
- Engraving on the left side of the receiver



GALATIAN II

Serious. Solid. Impact.

NEW

1190fps POWER!



Galatian II-Carbine

Shrouded shorter (carbine) barrel version with fixed sound moderator. (50-60fps less velocity due to carbine barrel)



Sling included



- Removable rear sight.
- Trigger lock included.



- Side lever action
- Cocking indicator
- Dovetail grooved receiver for 11mm or 22mm scope mounts
- Quattro trigger
- Micro adjustable rear sight with Truglo fiber optics.
- Detachable 16-shot magazine in .177 caliber, 14-shot magazine in .22 and 13-shot magazine in .25

- Manual loading, side lever action, pre-charged pneumatic (PCP) air rifle.
- Precision rifled choked barrel for accuracy, threaded for 1/2" UNF sound moderator & fitted muzzle cap.
- Available in .177 (4.5mm), .22 (5.5mm) and .25 (6.35mm) caliber.
- Detachable 16-shot magazine in .177 (4.5mm) caliber, 14-shot magazine in .22 (5.5mm) and 13-shot magazine in .25 (6.35mm) caliber.
- Ambidextrous & ergonomic design walnut stock.
- Checkering on grip & forend for better control & feel.
- Elevation adjustable comb which can be easily adjusted by a coin.
- Stock length of pull, elevation & fit angle adjustable rubber butt pad.
- Spare magazine carrying slot in the stock for 1 spare magazine.
- Detachable aluminum air cylinder tube (255cc). Spare cylinders are available.
- Rotating dust cover for the air filling hole on air cylinder.
- Built-in pressure gauge on the air cylinder to monitor the cylinder pressure.
- Includes quick-fill nozzle & air cylinder discharging cap.
- Dovetail groove receiver for both 11mm and 22mm scope mounts.
- Cocking indicator.
- Aircraft aluminum alloy receiver in white nickel finish and with engraving.
- Overall blued finish on air tube and barrel.
- Manual Safety.
- "Anti-double pellet feed" mechanism preventing more than one pellet loading into barrel.
- Patented anti-knock system to prevent gas wastage when rifle is knocked or bounced.
- Detachable & adjustable rear sight with Truglo fiber optics.
- Elevation adjustable front sight with Truglo fiber optics.
- Quattro Trigger: 2-stage full adjustable match trigger for trigger travel and trigger load.
- Gold plated metal trigger & metal trigger guard.
- Fitted sling swivels.
- Hard case, sling, and a trigger lock included.
- Spare air cylinders with regulator are available.



Carrying case included.



- Elevation adjustable comb which can be easily adjusted by a coin. Stock length of pull, elevation & fit angle adjustable rubber butt pad.
- Spare magazine carrying slot in the stock



- Quattro trigger
- Engraving on the left side of the receiver

Model	Caliber	Max. Muzzle Velocity (*)	Energy		Magazine Capacity	Air Tube Volume	Fill Pressure	Shots per fill	Stock	Overall Length	Barrel Length	Weight	Fiber Optic Sights Diameters	
			Joules	ft.lbs									Rear Sight	Front Sight
Galatian II	4.5mm / .177cal	360m/s (1190fps)	37	27	16	255cc	200 BAR	80	High Quality Turkish Walnut Monte Carlo Cheekpiece, Adjustable Butt Pad & Adjustable Comb	1075mm (42.3")	585mm (23")	3.9kg (8.6lbs)	0.9mm (.035") green	1.5mm (.060") red
	5.5mm / .22cal	333m/s (1100fps)	53	39	14	255cc	200 BAR	70						
	6.35mm / .25cal	303m/s (1000fps)	60	44	13	255cc	200 BAR	60						
Galatian II-Carbine	4.5mm / .177cal	342m/s (1130fps)	33	24	16	255cc	200 BAR	80	High Quality Turkish Walnut Monte Carlo Cheekpiece, Adjustable Butt Pad & Adjustable Comb	1100mm (43.3")	450mm (17.7")	3.8kg (8.4lbs)	No Sights	No Sights
	5.5mm / .22cal	318m/s (1050fps)	49	36	14	255cc	200 BAR	70						
	6.35mm / .25cal	287m/s (950fps)	54	40	13	255cc	200 BAR	60						

* Above maximum muzzle velocity figures may differ depending on the pellet weight & shape.

* The energy restriction of a particular country can be achieved by the reduction in the muzzle velocity. The above maximum velocity figures are obtained when there is no energy restriction on the air rifle and when measured at optimum pressure value in the air tube. As a nature of PCP air rifles the velocity starts low at maximum pressure level in the air tube, then starts to increase and gets to the maximum at optimum pressure value in the air tube; and then it starts to decrease again as the pressure in the air cylinder gets too low.



GALATIAN III

Serious. Solid. Impact.

NEW

1190fps POWER!



QUATTRO TRIGGER



Carrying case included.



Galatian III-Carbine

Shrouded shorter (carbine) barrel version with fixed sound moderator. (50-60fps less velocity due to carbine barrel)



Sling included

- Manual loading, side lever action, pre-charged pneumatic (PCP) air rifle.
- Precision rifled choked barrel for accuracy, threaded for 1/2" UNF sound moderator & fitted muzzle cap.
- Available in .177 (4.5mm), .22 (5.5mm) and .25 (6.35mm) caliber.
- Detachable 16-shot magazine in .177 (4.5mm) caliber, 14-shot magazine in .22 (5.5mm) and 13-shot magazine in .25 (6.35mm) caliber.
- Ambidextrous & ergonomic design synthetic stock with thumbhole.
- Checkering on grip & forend for better control & feel
- Elevation adjustable comb which can be easily adjusted by a coin.
- Stock length of pull, elevation & fit angle adjustable rubber butt pad.
- Spare magazine carrying slot in the stock for 1 spare magazine.
- 3 picatinny rails beneath and on the sides of the forearm.
- Detachable aluminum air cylinder tube (255cc). Spare cylinders are available.
- Rotating dust cover for the air filling hole on air cylinder.
- Built-in pressure gauge on the air cylinder to monitor the cylinder pressure.
- Includes quick-fill nozzle & air cylinder discharging cap.
- Dovetail groove receiver for both 11mm and 22mm scope mounts.
- Cocking indicator.
- Black anodized aircraft aluminum alloy receiver.
- Overall blued finish on air tube and barrel.
- Manual Safety.
- "Anti-double pellet feed" mechanism preventing more than one pellet loading into barrel.
- Patented anti-knock system to prevent gas wastage when rifle is knocked or bounced.
- Detachable & adjustable rear sight with Truglo fiber optics.
- Elevation adjustable front sight with Truglo fiber optics.
- Quattro Trigger: 2-stage full adjustable match trigger for trigger travel and trigger load.
- Gold plated metal trigger & metal trigger guard.
- Fitted sling swivels.
- Hard case, sling, and a trigger lock included.
- Spare air cylinders with regulator are available.



- Side lever action
- Cocking indicator
- Dovetail grooved receiver for 11mm or 22mm scope mounts
- Quattro trigger
- Micro adjustable rear sight with Truglo fiber optics.
- Detachable 16-shot magazine in .177 caliber, 14-shot magazine in .22 and 13-shot magazine in .25



3 picatinny rails beneath and on the sides the forearm.



- Elevation adjustable comb which can be easily adjusted by a coin. Stock length of pull, elevation & fit angle adjustable rubber butt pad.
- Spare magazine carrying slot in the stock



- Removable rear sight.
- Trigger lock included.

Model	Caliber	Max. Muzzle Velocity (*)	Energy		Magazine Capacity	Air Tube Volume	Fill Pressure	Shots per fill	Stock	Overall Length	Barrel Length	Weight	Fiber Optic Sights Diameters	
			Joules	ft.lbs									Rear Sight	Front Sight
Galatian III	4.5mm / .177cal	360m/s (1190fps)	37	27	16	255cc	200 BAR	80	Advanced Polymer, Thumbhole, Monte Carlo Cheekpiece, Adjustable Butt Pad & Adjustable Comb	1075mm (42.3")	585mm (23")	4.2kg (9.2lbs)	0.9mm (.035") green	1.5mm (.060") red
	5.5mm / .22cal	333m/s (1100fps)	53	39	14	255cc	200 BAR	70						
	6.35mm / .25cal	303m/s (1000fps)	60	44	13	255cc	200 BAR	60						
Galatian III-Carbine	4.5mm / .177cal	342m/s (1130fps)	33	24	16	255cc	200 BAR	80	Advanced Polymer, Thumbhole, Monte Carlo Cheekpiece, Adjustable Butt Pad & Adjustable Comb	1100mm (43.3")	450mm (17.7")	4.1kg (9lbs)	No Sights	No Sights
	5.5mm / .22cal	318m/s (1050fps)	49	36	14	255cc	200 BAR	70						
	6.35mm / .25cal	287m/s (950fps)	54	40	13	255cc	200 BAR	60						

* Above maximum muzzle velocity figures may differ depending on the pellet weight & shape.
 * The energy restriction of a particular country can be achieved by the reduction in the muzzle velocity. The above maximum velocity figures are obtained when there is no energy restriction on the air rifle and when measured at optimum pressure value in the air tube. As a nature of PCP air rifles the velocity starts low at maximum pressure level in the air tube, then starts to increase and gets to the maximum at optimum pressure value in the air tube; and then it starts to decrease again as the pressure in the air cylinder gets too low.



GALATIAN IV

Serious. Solid. Impact.

NEW

1190fps POWER!



QUATTRO TRIGGER

Carrying case included.



Galatian IV-Carbine

Shrouded shorter (carbine) barrel version with fixed sound moderator. (50-60fps less velocity due to carbine barrel)



Sling included




3 picatinny rails beneath and on the sides the forearm.



- Side lever action
- Cocking indicator
- Dovetail grooved receiver for 11mm or 22mm scope mounts
- Quattro trigger
- Micro adjustable rear sight with Truglo fiber optics.
- Detachable 16-shot magazine in .177 caliber, 14-shot magazine in .22 and 13-shot magazine in .25

- Manual loading, side lever action, pre-charged pneumatic (PCP) air rifle.
- Precision rifled choked barrel for accuracy, threaded for 1/2" UNF sound moderator & fitted muzzle cap.
- Available in .177 (4.5mm), .22 (5.5mm) and .25 (6.35mm) caliber.
- Detachable 16-shot magazine in .177 (4.5mm) caliber, 14-shot magazine in .22 (5.5mm) and 13-shot magazine in .25 (6.35mm) caliber.
- Ambidextrous & ergonomic design synthetic stock.
- Checkering on grip & forend for better control & feel.
- Elevation adjustable comb which can be easily adjusted by a coin.
- Stock length of pull, elevation & fit angle adjustable rubber butt pad.
- Spare magazine carrying slot in the stock for 1 spare magazine.
- 3 picatinny rails beneath and on the sides of the forearm.
- Detachable aluminum air cylinder tube (255cc). Spare cylinders are available.
- Rotating dust cover for the air filling hole on air cylinder.
- Built-in pressure gauge on the air cylinder to monitor the cylinder pressure.
- Includes quick-fill nozzle & air cylinder discharging cap.
- Dovetail groove receiver for both 11mm and 22mm scope mounts.
- Cocking indicator.
- Black anodized aircraft aluminum alloy receiver.
- Overall blued finish on air tube and barrel.
- Manual Safety.
- "Anti-double pellet feed" mechanism preventing more than one pellet loading into barrel.
- Patented anti-knock system to prevent gas wastage when rifle is knocked or bounced.
- Detachable & adjustable rear sight with Truglo fiber optics.
- Elevation adjustable front sight with Truglo fiber optics.
- Quattro Trigger: 2-stage full adjustable match trigger for trigger travel and trigger load.
- Gold plated metal trigger & metal trigger guard.
- Fitted sling swivels.
- Hard case, sling, and a trigger lock included.
- Spare air cylinders with regulator are available.

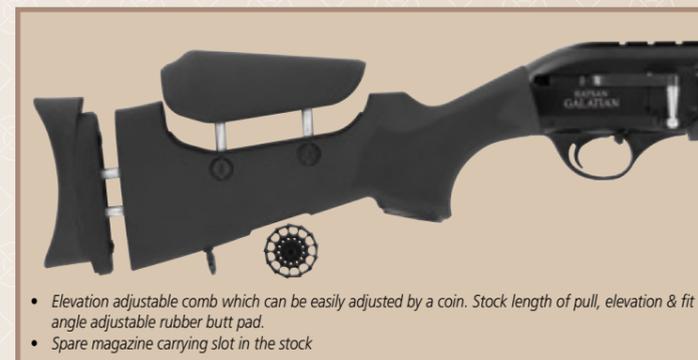

- Elevation adjustable comb which can be easily adjusted by a coin. Stock length of pull, elevation & fit angle adjustable rubber butt pad.
- Spare magazine carrying slot in the stock



- Removable rear sight.
- Trigger lock included.

Model	Caliber	Max. Muzzle Velocity (*)	Energy		Magazine Capacity	Air Tube Volume	Fill Pressure	Shots per fill	Stock	Overall Length	Barrel Length	Weight	Fiber Optic Sights Diameters	
			Joules	ft.lbs									Rear Sight	Front Sight
Galatian IV	4.5mm / .177cal	360m/s (1190fps)	37	27	16	255cc	200 BAR	80	Advanced Polymer, Monte Carlo Cheekpiece, Adjustable Butt Pad & Adjustable Comb	1075mm (42.3")	585mm (23")	4.15kg (9.1lbs)	0.9mm (.035") green	1.5mm (.060") red
	5.5mm / .22cal	333m/s (1100fps)	53	39	14	255cc	200 BAR	70						
	6.35mm / .25cal	303m/s (1000fps)	60	44	13	255cc	200 BAR	60						
Galatian IV-Carbine	4.5mm / .177cal	342m/s (1130fps)	33	24	16	255cc	200 BAR	80	Advanced Polymer, Monte Carlo Cheekpiece, Adjustable Butt Pad & Adjustable Comb	1100mm (43.3")	450mm (17.7")	4.05kg (8.9lbs)	No Sights	No Sights
	5.5mm / .22cal	318m/s (1050fps)	49	36	14	255cc	200 BAR	70						
	6.35mm / .25cal	287m/s (950fps)	54	40	13	255cc	200 BAR	60						

* Above maximum muzzle velocity figures may differ depending on the pellet weight & shape.


* The energy restriction of a particular country can be achieved by the reduction in the muzzle velocity. The above maximum velocity figures are obtained when there is no energy restriction on the air rifle and when measured at optimum pressure value in the air tube. As a nature of PCP air rifles the velocity starts low at maximum pressure level in the air tube, then starts to increase and gets to the maximum at optimum pressure value in the air tube; and then it starts to decrease again as the pressure in the air cylinder gets too low.



Serious. Solid. Impact.

10-Shot, Side Bolt Models

1250fps POWER!

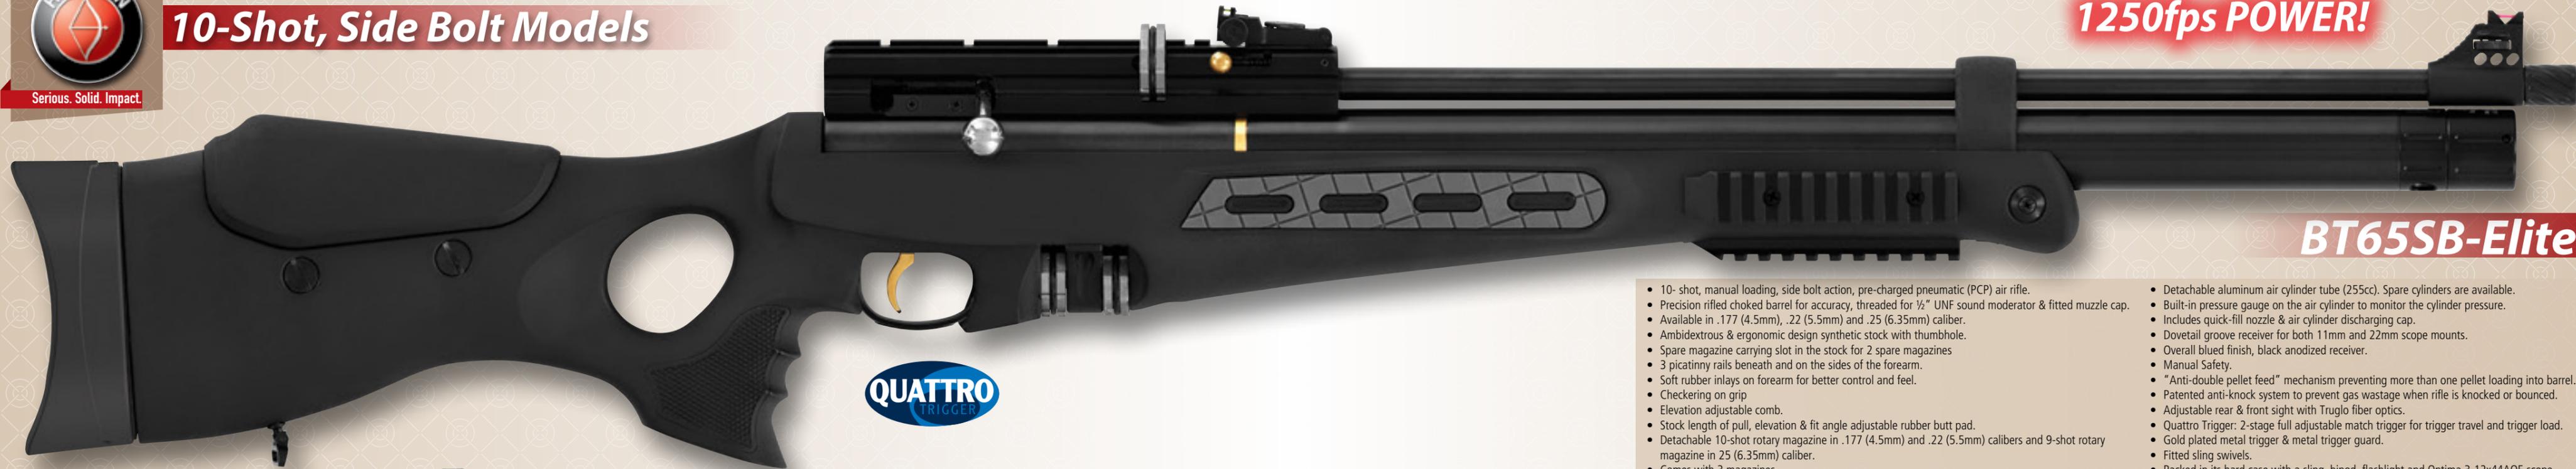

BT65SB-Elite



- 10- shot, manual loading, side bolt action, pre-charged pneumatic (PCP) air rifle.
- Precision rifled choked barrel for accuracy, threaded for 1/2" UNF sound moderator & fitted muzzle cap.
- Available in .177 (4.5mm), .22 (5.5mm) and .25 (6.35mm) caliber.
- Ambidextrous & ergonomic design synthetic stock with thumbhole.
- Spare magazine carrying slot in the stock for 2 spare magazines
- 3 picatinny rails beneath and on the sides of the forearm.
- Soft rubber inlays on forearm for better control and feel.
- Checkering on grip
- Elevation adjustable comb.
- Stock length of pull, elevation & fit angle adjustable rubber butt pad.
- Detachable 10-shot rotary magazine in .177 (4.5mm) and .22 (5.5mm) calibers and 9-shot rotary magazine in 25 (6.35mm) caliber.
- Comes with 3 magazines.
- Detachable aluminum air cylinder tube (255cc). Spare cylinders are available.
- Built-in pressure gauge on the air cylinder to monitor the cylinder pressure.
- Includes quick-fill nozzle & air cylinder discharging cap.
- Dovetail groove receiver for both 11mm and 22mm scope mounts.
- Overall blued finish, black anodized receiver.
- Manual Safety.
- "Anti-double pellet feed" mechanism preventing more than one pellet loading into barrel.
- Patented anti-knock system to prevent gas wastage when rifle is knocked or bounced.
- Adjustable rear & front sight with Truglo fiber optics.
- Quattro Trigger: 2-stage full adjustable match trigger for trigger travel and trigger load.
- Gold plated metal trigger & metal trigger guard.
- Fitted sling swivels.
- Packed in its hard case with a sling, bipod, flashlight and Optima 3-12x44AOE scope.



Plastic case included.

Model	Caliber	Max. Muzzle Velocity (*)	Energy (*)		Magazine Capacity	Air Tube Volume	Fill Pressure	Shots per fill	Stock	Overall Length	Barrel Length	Weight	Fiber Optic Sights Diameters	
			Joules	ft.lbs									Rear Sight	Front Sight
BT65SB-Elite (Side Bolt)	4.5mm / .177cal	380m/s (1250fps)	40	30	10	255cc	200 BAR	70	Advanced polymer, thumbhole, montecarlo cheekpiece, adjustable butt pad & adjustable comb	1080mm (42.5")	585mm (23")	4.23kg (9.3lbs)	0.9mm (.035") green	1.5mm (.060") red
	5.5mm / .22cal	360m/s (1180fps)	61	45	10	255cc	200 BAR	70						
	6.35mm / .25cal	330m/s (1090fps)	71	52	9	255cc	200 BAR	65						

* Above maximum muzzle velocity figures may differ depending on the pellet weight & shape.

* The energy restriction of a particular country can be achieved by the reduction in the muzzle velocity. The above maximum velocity figures are obtained when there is no energy restriction on the air rifle and when measured at optimum pressure value in the air tube. As a nature of PCP air rifles the velocity starts low at maximum pressure level in the air tube, then starts to increase and gets to the maximum at optimum pressure value in the air tube; and then it starts to decrease again as the pressure in the air cylinder gets too low.



- Side bolt action
- Spare magazine carrying slot for 2 spare magazine
- Manual Safety
- Scope mount rail for both 11mm and 22mm scope mounts
- 10-shot magazine (9-shot magazine in .25 /6.35mm caliber)
- Micro adjustable rear sight with Truglo fiber optics
- Quattro Trigger: 2-stage full adjustable match trigger for trigger travel and trigger load.
- Gold plated trigger blade



Elevation adjustable comb. Stock length of pull, elevation & fit angle adjustable rubber butt pad.



3 picatinny rails beneath and on the sides the forearm.



TRUGLO
Adjustable front sight

1/2" UNF threaded muzzle and fitted muzzle cap. Detachable 255cc air cylinder for 200 bar fill pressure with built in pressure gauge.



Includes a sling, bipod, flashlight and Optima 3-12x44AOE scope.



Serious. Solid. Impact.

10-Shot, Rear Bolt Models

1250fps POWER!



BT65RB-Elite



- 10- shot, manual loading, rear bolt action, pre-charged pneumatic (PCP) air rifle.
- Precision rifled choked barrel for accuracy, threaded for 1/2" UNF sound moderator & fitted muzzle cap.
- Available in .177 (4.5mm), .22 (5.5mm) and .25 (6.35mm) caliber.
- Ambidextrous & ergonomic design synthetic stock with thumbhole.
- Spare magazine carrying slot in the stock for 2 spare magazines
- 3 picatinny rails beneath and on the sides of the forearm.
- Soft rubber inlays on forearm for better control and feel.
- Checkering on grip
- Elevation adjustable comb.
- Stock length of pull, elevation & fit angle adjustable rubber butt pad.
- Detachable 10-shot rotary magazine in .177 (4.5mm) and .22 (5.5mm) calibers and 9-shot rotary magazine in 25 (6.35mm) caliber.
- Comes with 3 magazines
- Detachable aluminum air cylinder tube (255cc). Spare cylinders are available.
- Built-in pressure gauge on the air cylinder to monitor the cylinder pressure.
- Includes quick-fill nozzle & air cylinder discharging cap
- Dovetail groove receiver for both 11mm and 22mm scope mounts.
- Overall blued finish, black anodized receiver.
- Manual Safety
- "Anti-double pellet feed" mechanism preventing more than one pellet loading into barrel.
- Patented anti-knock system to prevent gas wastage when rifle is knocked or bounced.
- Adjustable rear & front sight with Truglo fiber optics.
- Quattro Trigger: 2-stage full adjustable match trigger for trigger travel and trigger load.
- Gold plated metal trigger & metal trigger guard.
- Fitted sling swivels
- Packed in its hard case with a sling, bipod, flashlight and Optima 3-12x44AOE scope



Plastic case included.

Model	Caliber	Max. Muzzle Velocity (*)	Energy (*)		Magazine Capacity	Air Tube Volume	Fill Pressure	Shots per fill	Stock	Overall Length	Barrel Length	Weight	Fiber Optic Sights Diameters	
			Joules	ft.lbs									Rear Sight	Front Sight
BT65RB-Elite (Rear Bolt)	4.5mm / .177cal	380m/s (1250fps)	40	30	10	255cc	200 BAR	70	Advanced polymer, thumbhole, montecarlo cheekpiece, adjustable butt pad & adjustable comb	1080mm (42.5")	585mm (23")	4.23kg (9.3lbs)	0.9mm (.035") green	1.5mm (.060") red
	5.5mm / .22cal	360m/s (1180fps)	61	45	10	255cc	200 BAR	70						
	6.35mm / .25cal	330m/s (1090fps)	71	52	9	255cc	200 BAR	65						

* Above maximum muzzle velocity figures may differ depending on the pellet weight & shape.

* The energy restriction of a particular country can be achieved by the reduction in the muzzle velocity. The above maximum velocity figures are obtained when there is no energy restriction on the air rifle and when measured at optimum pressure value in the air tube. As a nature of PCP air rifles the velocity starts low at maximum pressure level in the air tube, then starts to increase and gets to the maximum at optimum pressure value in the air tube; and then it starts to decrease again as the pressure in the air cylinder gets too low.



- Rear bolt action
- Spare magazine carrying slot for 2 spare magazine
- Manual Safety
- Scope mount rail for both 11mm and 22mm scope mounts
- 10-shot magazine (9-shot magazine in .25 /6.35mm caliber)
- Micro adjustable rear sight with Truglo fiber optics
- Quattro Trigger: 2-stage full adjustable match trigger for trigger travel and trigger load.
- Gold plated trigger blade



Elevation adjustable comb. Stock length of pull, elevation & fit angle adjustable rubber butt pad.



3 picatinny rails beneath and on the sides the forearm.



TRUGLO
Adjustable front sight

1/2" UNF threaded muzzle and fitted muzzle cap. Detachable 255cc air cylinder for 200 bar fill pressure with built in pressure gauge.



Includes a sling, bipod, flashlight and Optima 3-12x44AOE scope.



Serious. Solid. Impact.

10-Shot, Side Bolt Models



1250fps POWER!

BT65 SB-W



- 10- shot, manual loading, side bolt action, pre-charged pneumatic (PCP) air rifle.
- Precision rifled choked barrel for accuracy, threaded for 1/2" UNF sound moderator & fitted muzzle cap.
- Available in .177 (4.5mm), .22 (5.5mm) and .25 (6.35mm) caliber.
- Genuine Turkish walnut ambidextrous stock with montecarlo cheekpiece
- Elevation adjustable comb.
- Stock length of pull, elevation & fit angle adjustable rubber butt pad.
- Detachable 10-shot rotary magazine in .177 (4.5mm) and .22 (5.5mm) calibers and 9-shot rotary magazine in 25 (6.35mm) caliber.
- Includes one additional magazine.
- Detachable steel air cylinder tube (180cc). Spare cylinders are available.
- Built-in pressure gauge on the air cylinder to monitor the cylinder pressure.
- Includes quick-fill nozzle & air cylinder discharging cap.
- Dovetail groove receiver for both 11mm and 22mm scope mounts.
- Overall blued finish, black anodized receiver.
- Manual Safety.
- "Anti-double pellet feed" mechanism preventing more than one pellet loading into barrel.
- Patented anti-knock system to prevent gas wastage when rifle is knocked or bounced.
- Adjustable rear & front sight with Truglo fiber optics.
- Quattro Trigger: 2-stage full adjustable match trigger for trigger travel and trigger load.
- Gold plated metal trigger & metal trigger guard.
- Fitted sling swivels.
- Includes a sling.

Model	Caliber	Max. Muzzle Velocity (*)	Energy (*)		Magazine Capacity	Air Tube Volume	Fill Pressure	Shots per fill	Stock	Overall Length	Barrel Length	Weight	Fiber Optic Sights Diameters	
			Joules	ft.lbs									Rear Sight	Front Sight
BT65 SB-W (Side Bolt)	4.5mm / .177cal	380m/s (1250fps)	40	30	10	255cc	200 BAR	70	Genuine Turkish walnut, montecarlo cheekpiece, adjustable butt pad & adjustable comb	1080mm (42.5")	585mm (23")	4.3kg (9.4lbs)	0.9mm (.035") green	1.5mm (.060") red
	5.5mm / .22cal	360m/s (1180fps)	61	45	10	255cc	200 BAR	70						
	6.35mm / .25cal	330m/s (1090fps)	71	52	9	255cc	200 BAR	65						

* Above maximum muzzle velocity figures may differ depending on the pellet weight & shape.
 * The energy restriction of a particular country can be achieved by the reduction in the muzzle velocity. The above maximum velocity figures are obtained when there is no energy restriction on the air rifle and when measured at optimum pressure value in the air tube. As a nature of PCP air rifles the velocity starts low at maximum pressure level in the air tube, then starts to increase and gets to the maximum at optimum pressure value in the air tube; and then it starts to decrease again as the pressure in the air cylinder gets too low.



- Side bolt action
- Manual Safety
- Scope mount rail for both 11mm and 22mm scope mounts
- 10-shot magazine (9-shot magazine in .25 /6.35mm caliber)
- Micro adjustable rear sight with Truglo fiber optics

- Quattro Trigger: 2-stage full adjustable match trigger for trigger travel and trigger load.
- Gold plated trigger blade



Elevation adjustable comb. Stock length of pull, elevation & fit angle adjustable rubber butt pad.



TRUGLO Adjustable front sight
1/2" UNF threaded muzzle and fitted muzzle cap. Detachable 255cc air cylinder for 200 bar fill pressure with built in pressure gauge.



Sling included.



10-Shot, Side Bolt Models

Serious. Solid. Impact.



1250fps POWER!

BT65 SB



Bipod included.

- 10-shot, manual loading, side bolt action, pre-charged pneumatic (PCP) air rifle.
- Precision rifled choked barrel for accuracy, threaded for 1/2" UNF sound moderator & fitted muzzle cap.
- Available in .177 (4.5mm), .22 (5.5mm) and .25 (6.35mm) caliber.
- Ambidextrous & ergonomic design synthetic stock.
- Integrated picatinny rail beneath the forearm.
- Soft rubber inlays on grip and forearm for better control and feel.
- Elevation adjustable comb which can be easily adjusted by a coin.
- Stock length of pull, elevation & fit angle adjustable rubber butt pad.
- Detachable 10-shot rotary magazine in .177 (4.5mm) and .22 (5.5mm) calibers and 9-shot rotary magazine in 25 (6.35mm) caliber.
- Includes one additional magazine.
- Detachable aluminum air cylinder tube (255cc). Spare cylinders are available.

- Built-in pressure gauge on the air cylinder to monitor the cylinder pressure.
- Includes quick-fill nozzle & air cylinder discharging cap supplied in the box.
- Dovetail groove receiver for both 11mm and 22mm scope mounts.
- Overall blued finish, black anodized receiver.
- Manual Safety
- "Anti-double pellet feed" mechanism preventing more than one pellet loading into barrel.
- Patented anti-knock system to prevent gas wastage when rifle is knocked or bounced.
- Adjustable rear & front sight with Truglo fiber optics.
- Quattro Trigger: 2-stage full adjustable match trigger for trigger travel and trigger load.
- Gold plated metal trigger & metal trigger guard.
- Fitted sling swivels.
- Includes a sling & bipod.



Sling included.

- Side bolt action
- Manual Safety
- Scope mount rail for both 11mm and 22mm scope mounts
- 10-shot magazine (9-shot magazine in .25 /6.35mm caliber)
- Micro adjustable rear sight with Truglo fiber optics



- Quattro Trigger: 2-stage full adjustable match trigger for trigger travel and trigger load.
- Gold plated trigger blade



Elevation adjustable comb. Stock length of pull, elevation & fit angle adjustable rubber butt pad.



TRUGLO Adjustable front sight

1/2" UNF threaded muzzle and fitted muzzle cap. Detachable 255cc air cylinder for 200 bar fill pressure with built in pressure gauge.



BT65 SB - CAMO
Mossy Oak Break Up camo version

BT65 SB - MW
Luxurious walnut woodgrain camo version

Model	Caliber	Max. Muzzle Velocity (*)	Energy (*)		Magazine Capacity	Air Tube Volume	Fill Pressure	Shots per fill	Stock	Overall Length	Barrel Length	Weight	Fiber Optic Sights Diameters	
			Joules	ft.lbs									Rear Sight	Front Sight
BT65 SB (Side Bolt)	4.5mm / .177cal	380m/s (1250fps)	40	30	10	255cc	200 BAR	70	Advanced polymer, montecarlo cheekpiece, adjustable butt pad & adjustable comb	1080mm (42.5")	585mm (23")	4.1kg (9lbs)	0.9mm (.035") green	1.5mm (.060") red
	5.5mm / .22cal	360m/s (1180fps)	61	45	10	255cc	200 BAR	70						
	6.35mm / .25cal	330m/s (1090fps)	71	52	9	255cc	200 BAR	65						

* Above maximum muzzle velocity figures may differ depending on the pellet weight & shape.

* The energy restriction of a particular country can be achieved by the reduction in the muzzle velocity. The above maximum velocity figures are obtained when there is no energy restriction on the air rifle and when measured at optimum pressure value in the air tube. As a nature of PCP air rifles the velocity starts low at maximum pressure level in the air tube, then starts to increase and gets to the maximum at optimum pressure value in the air tube; and then it starts to decrease again as the pressure in the air cylinder gets too low.



Serious. Solid. Impact.

10-Shot, Rear Bolt Models



1250fps POWER!

BT65 RB-W



- 10- shot, manual loading, rear bolt action, pre-charged pneumatic (PCP) air rifle.
- Precision rifled choked barrel for accuracy, threaded for 1/2" UNF sound moderator & fitted muzzle cap.
- Available in .177 (4.5mm), .22 (5.5mm) and .25 (6.35mm) caliber.
- Genuine Turkish walnut ambidextrous stock with montecarlo cheekpiece
- Elevation adjustable comb.
- Stock length of pull, elevation & fit angle adjustable rubber butt pad.
- Detachable 10-shot rotary magazine in .177 (4.5mm) and .22 (5.5mm) calibers and 9-shot rotary magazine in 25 (6.35mm) caliber.
- Includes one additional magazine.
- Detachable aluminum air cylinder tube (255cc). Spare cylinders are available.
- Built-in pressure gauge on the air cylinder to monitor the cylinder pressure.
- Includes quick-fill nozzle & air cylinder discharging cap supplied in the box.
- Dovetail groove receiver for both 11mm and 22mm scope mounts.
- Overall blued finish, black anodized receiver.
- Manual Safety
- "Anti-double pellet feed" mechanism preventing more than one pellet loading into barrel.
- Patented anti-knock system to prevent gas wastage when rifle is knocked or bounced.
- Adjustable rear & front sight with Truglo fiber optics.
- Quattro Trigger: 2-stage full adjustable match trigger for trigger travel and trigger load.
- Gold plated metal trigger & metal trigger guard.
- Fitted sling swivels.
- Includes a sling.



- Rear bolt action
- Manual Safety
- Scope mount rail for both 11mm and 22mm scope mounts
- 10-shot magazine (9-shot magazine in .25/6.35mm caliber)
- Micro adjustable rear sight with Truglo fiber optics

- Quattro Trigger: 2-stage full adjustable match trigger for trigger travel and trigger load.
- Gold plated trigger blade.



Elevation adjustable comb. Stock length of pull, elevation & fit angle adjustable rubber butt pad.



TRUGLO
Adjustable front sight

1/2" UNF threaded muzzle and fitted muzzle cap.
Detachable 255cc air cylinder for 200 bar fill pressure with built in pressure gauge.



Sling included.

Model	Caliber	Max. Muzzle Velocity (*)	Energy (*)		Magazine Capacity	Air Tube Volume	Fill Pressure	Shots per fill	Stock	Overall Length	Barrel Length	Weight	Fiber Optic Sights Diameters	
			Joules	ft.lbs									Rear Sight	Front Sight
BT65 RB-W (Rear Bolt)	4.5mm / .177cal	380m/s (1250fps)	40	30	10	255cc	200 BAR	70	Genuine Turkish walnut, montecarlo cheekpiece, adjustable butt pad & adjustable comb	1080mm (42.5")	585mm (23")	4.3kg (9.4lbs)	0.9mm (.035") green	1.5mm (.060") red
	5.5mm / .22cal	360m/s (1180fps)	61	45	10	255cc	200 BAR	70						
	6.35mm / .25cal	330m/s (1090fps)	71	52	9	255cc	200 BAR	65						


* Above maximum muzzle velocity figures may differ depending on the pellet weight & shape.

* The energy restriction of a particular country can be achieved by the reduction in the muzzle velocity. The above maximum velocity figures are obtained when there is no energy restriction on the air rifle and when measured at optimum pressure value in the air tube. As a nature of PCP air rifles the velocity starts low at maximum pressure level in the air tube, then starts to increase and gets to the maximum at optimum pressure value in the air tube; and then it starts to decrease again as the pressure in the air cylinder gets too low.



Serious. Solid. Impact.

10-Shot, Rear Bolt Models

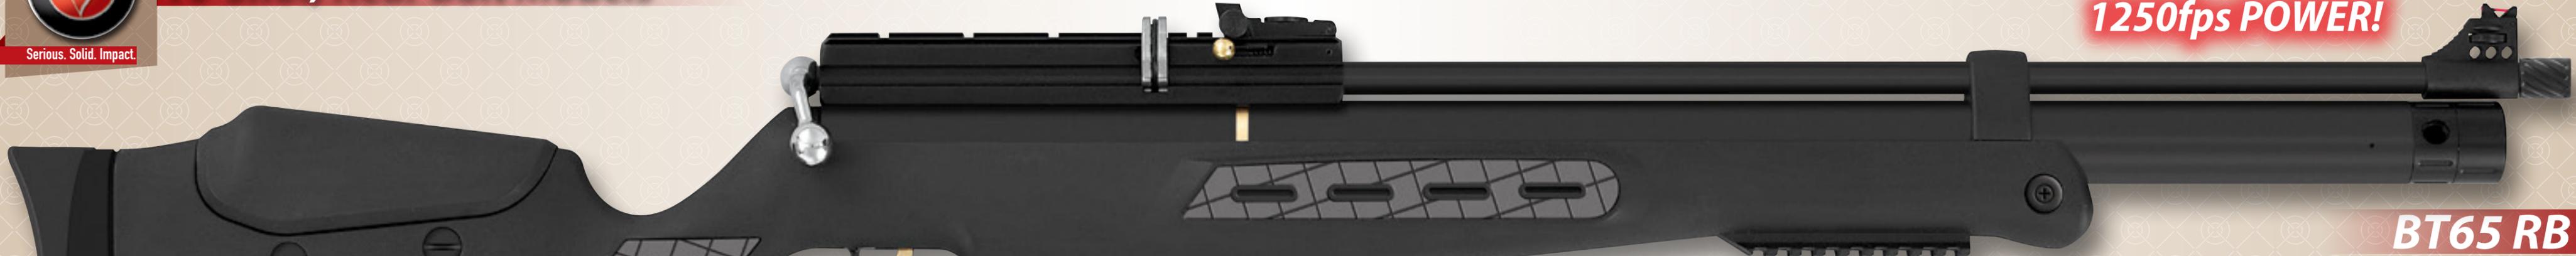

1250fps POWER!

BT65 RB



Bipod included.



- Rear bolt action
- Manual Safety
- Scope mount rail for both 11mm and 22mm scope mounts
- 10-shot magazine (9-shot magazine in .25 /6.35mm caliber)
- Micro adjustable rear sight with Truglo fiber optics

- Quattro Trigger: 2-stage full adjustable match trigger for trigger travel and trigger load.
- Gold plated trigger blade

- 10- shot, manual loading, rear bolt action, pre-charged pneumatic (PCP) air rifle.
- Precision rifled choked barrel for accuracy, threaded for 1/2" UNF sound moderator & fitted muzzle cap.
- Available in .177 (4.5mm), .22 (5.5mm) and .25 (6.35mm) caliber.
- Ambidextrous & ergonomic design synthetic stock.
- Integrated picatinny rail beneath the forearm.
- Soft rubber inlays on grip and forearm for better control and feel.
- Elevation adjustable comb which can be easily adjusted by a coin.
- Stock length of pull, elevation & fit angle adjustable rubber butt pad.
- Detachable 10-shot rotary magazine in .177 (4.5mm) and .22 (5.5mm) calibers and 9-shot rotary magazine in 25 (6.35mm) caliber.
- Includes one additional magazine.
- Detachable aluminum air cylinder tube (255cc). Spare cylinders are available.

- Built-in pressure gauge on the air cylinder to monitor the cylinder pressure.
- Includes quick-fill nozzle & air cylinder discharging cap supplied in the box.
- Dovetail groove receiver for both 11mm and 22mm scope mounts.
- Overall blued finish, black anodized receiver.
- Manual Safety
- "Anti-double pellet feed" mechanism preventing more than one pellet loading into barrel.
- Patented anti-knock system to prevent gas wastage when rifle is knocked or bounced.
- Adjustable rear & front sight with Truglo fiber optics.
- Quattro Trigger: 2-stage full adjustable match trigger for trigger travel and trigger load.
- Gold plated metal trigger & metal trigger guard.
- Fitted sling swivels.
- Includes a sling.



Sling included.

Model	Caliber	Max. Muzzle Velocity (*)	Energy (*)		Magazine Capacity	Air Tube Volume	Fill Pressure	Shots per fill	Stock	Overall Length	Barrel Length	Weight	Fiber Optic Sights Diameters	
			Joules	ft.lbs									Rear Sight	Front Sight
BT65 RB (Rear Bolt)	4.5mm / .177cal	380m/s (1250fps)	40	30	10	255cc	200 BAR	70	Advanced polymer, montecarlo cheekpiece, adjustable butt pad & adjustable comb	1080mm (42.5")	585mm (23")	4.1kg (9lbs)	0.9mm (.035") green	1.5mm (.060") red
	5.5mm / .22cal	360m/s (1180fps)	61	45	10	255cc	200 BAR	70						
	6.35mm / .25cal	330m/s (1090fps)	71	52	9	255cc	200 BAR	65						

* Above maximum muzzle velocity figures may differ depending on the pellet weight & shape.
 * The energy restriction of a particular country can be achieved by the reduction in the muzzle velocity. The above maximum velocity figures are obtained when there is no energy restriction on the air rifle and when measured at optimum pressure value in the air tube. As a nature of PCP air rifles the velocity starts low at maximum pressure level in the air tube, then starts to increase and gets to the maximum at optimum pressure value in the air tube; and then it starts to decrease again as the pressure in the air cylinder gets too low.



Elevation adjustable comb. Stock length of pull, elevation & fit angle adjustable rubber butt pad.



TRUGLO Adjustable front sight

1/2" UNF threaded muzzle and fitted muzzle cap. Detachable 255cc air cylinder for 200 bar fill pressure with built in pressure gauge.



BT65 RB - CAMO
Mossy Oak Break Up camo version

BT65 RB - MW
Luxurious walnut woodgrain camo version



Serious. Solid. Impact.

10-Shot, Side Lever Models



1070fps POWER!

AT44W-10



- 10- shot, manual loading, side lever action, pre-charged pneumatic (PCP) air rifle.
- Precision rifled choked barrel for accuracy, threaded for 1/2" UNF sound moderator & fitted muzzle cap.
- Available in .177 (4.5 mm), .22 (5.5 mm) and .25 (6.35 mm) caliber.
- Genuine Turkish walnut ambidextrous stock with montecarlo cheekpiece.
- Elevation & fit angle adjustable rubber butt pad.
- Detachable 10-shot rotary magazine in .177 (4.5 mm) and .22 (5.5 mm) calibers and 9-shot rotary magazine in 25 (6.35 mm) caliber.
- Includes one additional magazine.
- Detachable steel air cylinder tube (180cc). Spare cylinders are available.
- Built-in pressure gauge on the air cylinder to monitor the cylinder pressure.
- Includes quick-fill nozzle & air cylinder discharging cap supplied in the box.

- Dovetail groove receiver for both 11 mm and 22 mm scope mounts.
- Overall blued finish, black anodized receiver.
- Manual & Automatic Safety.
- "Anti-double pellet feed" mechanism preventing more than one pellet loading into barrel.
- Patented anti-knock system to prevent gas wastage when rifle is knocked or bounced.
- Adjustable rear & front sight with Truglo fiber optics.
- Quattro Trigger: 2-stage full adjustable match trigger for trigger travel and trigger load.
- Gold plated metal trigger & metal trigger guard.
- **Long version available (AT44W-10 Long) with 230 cc air cylinder tube, 58 cm barrel and 100 fps (30 m/s) more muzzle velocity.**



- Manual & Auto Safety.
- Scope mount rail for both 11 mm and 22 mm scope mounts.
- 10-shot magazine (9-shot magazine in .25/6.35mm caliber)
- Micro adjustable rear sight.

- Quattro Trigger: 2-stage full adjustable match trigger for trigger travel and trigger load.
- Gold plated trigger blade



Elevation & fit angle adjustable rubber butt pad.



TRUGLO Adjustable front sight

1/2" UNF threaded muzzle and fitted muzzle cap.

Detachable 180cc air cylinder for 200 bar fill pressure with built in pressure gauge. (230cc air cylinder in long version).



AT44WX-10

Fixed sound moderator equipped version with no sights. Hatsan recommends Optima 3-12x44AOE scope with AT44WX-10.

AT44W-10 Long

Long version with 230 cc air cylinder tube, 58 cm barrel and 100 fps (30 m/s) more muzzle velocity.

Model	Caliber	Max. Muzzle Velocity (*)	Energy (*)		Magazine Capacity	Air Tube Volume	Fill Pressure	Shots per fill	Stock	Overall Length	Barrel Length	Weight	Fiber Optic Sights Diameters	
			Joules	ft.lbs									Rear Sight	Front Sight
AT44W-10	4.5mm / .177cal	325m/s (1070fps)	30	22	10	180cc	200 BAR	80	Genuine Turkish walnut, montecarlo cheekpiece, adjustable butt pad.	990mm (39")	490mm (19.3")	3.6kg (7.9lbs)	0.9mm (.035") green	1.5mm (.060") red
	5.5mm / .22cal	295m/s (970fps)	42	31	10	180cc	200 BAR	70						
	6.35mm / .25cal	265m/s (870fps)	46	34	9	180cc	200 BAR	60						
AT44W-10 Long	4.5mm / .177cal	355m/s (1170fps)	36	27	10	230cc	200 BAR	80	Genuine Turkish walnut, montecarlo cheekpiece, adjustable butt pad.	1085mm (42.7")	585mm (23")	4kg (8.8lbs)	0.9mm (.035") green	1.5mm (.060") red
	5.5mm / .22cal	325m/s (1070fps)	51	38	10	230cc	200 BAR	70						
	6.35mm / .25cal	295m/s (970fps)	57	42	9	230cc	200 BAR	60						


* Above maximum muzzle velocity figures may differ depending on the pellet weight & shape.

* The energy restriction of a particular country can be achieved by the reduction in the muzzle velocity. The above maximum velocity figures are obtained when there is no energy restriction on the air rifle and when measured at optimum pressure value in the air tube. As a nature of PCP air rifles the velocity starts low at maximum pressure level in the air tube, then starts to increase and gets to the maximum at optimum pressure value in the air tube; and then it starts to decrease again as the pressure in the air cylinder gets too low.



Serious. Solid. Impact.

10-Shot, Side Lever Models

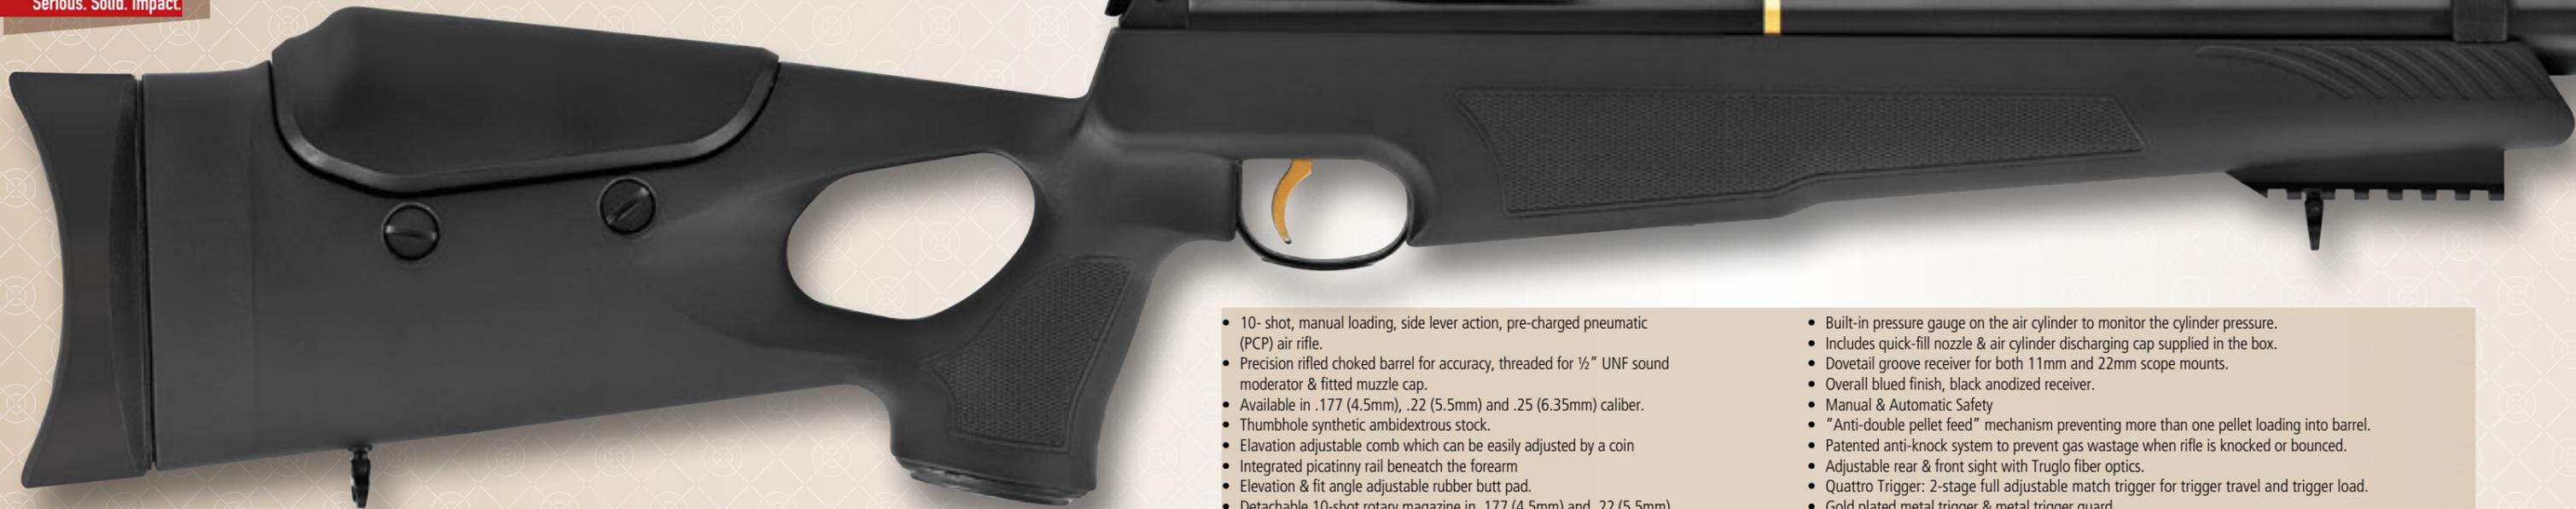

1070fps POWER!

AT44-10

- 10-shot, manual loading, side lever action, pre-charged pneumatic (PCP) air rifle.
- Precision rifled choked barrel for accuracy, threaded for 1/2" UNF sound moderator & fitted muzzle cap.
- Available in .177 (4.5mm), .22 (5.5mm) and .25 (6.35mm) caliber.
- Thumbhole synthetic ambidextrous stock.
- Elevation adjustable comb which can be easily adjusted by a coin
- Integrated picatinny rail beneath the forearm
- Elevation & fit angle adjustable rubber butt pad.
- Detachable 10-shot rotary magazine in .177 (4.5mm) and .22 (5.5mm) calibers and 9-shot rotary magazine in 25 (6.35mm) caliber.
- Includes one additional magazine.
- Detachable steel air cylinder tube (180cc). Spare cylinders are available.

- Built-in pressure gauge on the air cylinder to monitor the cylinder pressure.
- Includes quick-fill nozzle & air cylinder discharging cap supplied in the box.
- Dovetail groove receiver for both 11mm and 22mm scope mounts.
- Overall blued finish, black anodized receiver.
- Manual & Automatic Safety
- "Anti-double pellet feed" mechanism preventing more than one pellet loading into barrel.
- Patented anti-knock system to prevent gas wastage when rifle is knocked or bounced.
- Adjustable rear & front sight with Truglo fiber optics.
- Quattro Trigger: 2-stage full adjustable match trigger for trigger travel and trigger load.
- Gold plated metal trigger & metal trigger guard.
- Fitted sling swivels
- **Long version (AT44-10 Long) available with 230cc air cylinder tube, 58cm barrel and 100fps (30m/s) more muzzle velocity.**



- Manual & Auto Safety.
- Scope mount rail for both 11 mm and 22 mm scope mounts.
- 10-shot magazine (9-shot magazine in .25 /6.35mm caliber)
- Micro adjustable rear sight.



- Quattro Trigger: 2-stage full adjustable match trigger for trigger travel and trigger load.
- Gold plated trigger blade



- Elevation adjustable comb which can be easily adjusted by a coin.
- Elevation & fit angle adjustable rubber butt pad.



TRUGLO
Adjustable front sight

1/2" UNF threaded muzzle and fitted muzzle cap.

Detachable 180cc air cylinder for 200 bar fill pressure with built in pressure gauge. (230cc air cylinder in long version).



AT44X-10

Fixed sound moderator equipped version with no sights. Hatsan recommends Optima 3-12x44AOE scope with AT44X-10. Available in Camo and MW finish versions.



AT44-10 CAMO

Mossy Oak New Break Up camo version.



AT44-10 MW

Stock luxurious walnut woodgrain camo version.



AT44-10 Long

Long version with 230cc air cylinder tube, 58cm barrel and 100fps (30m/s) more muzzle velocity. Available in Camo and MW finish versions.

Model	Caliber	Max. Muzzle Velocity (*)	Energy (*)		Magazine Capacity	Air Tube Volume	Fill Pressure	Shots per fill	Stock	Overall Length	Barrel Length	Weight	Fiber Optic Sights Diameters	
			Joules	ft.lbs									Rear Sight	Front Sight
AT44-10	4.5mm / .177cal	325m/s (1070fps)	30	22	10	180cc	200 BAR	80	Advanced polymer, thumbhole, elevation adjustable comb, adjustable butt pad.	990mm (39")	490mm (19.3")	3.3kg (7.3lbs)	0.9mm (.035") green	1.5mm (.060") red
	5.5mm / .22cal	295m/s (970fps)	42	31	10	180cc	200 BAR	70						
	6.35mm / .25cal	265m/s (870fps)	46	34	9	180cc	200 BAR	60						
AT44-10 Long	4.5mm / .177cal	355m/s (1170fps)	36	27	10	230cc	200 BAR	80	Advanced polymer, thumbhole, elevation adjustable comb, adjustable butt pad.	1085mm (42.7")	585mm (23")	3.70kg (8.1lbs)	0.9mm (.035") green	1.5mm (.060") red
	5.5mm / .22cal	325m/s (1070fps)	51	38	10	230cc	200 BAR	70						
	6.35mm / .25cal	295m/s (970fps)	57	42	9	230cc	200 BAR	60						


* Above maximum muzzle velocity figures may differ depending on the pellet weight & shape.

* The energy restriction of a particular country can be achieved by the reduction in the muzzle velocity. The above maximum velocity figures are obtained when there is no energy restriction on the air rifle and when measured at optimum pressure value in the air tube. As a nature of PCP air rifles the velocity starts low at maximum pressure level in the air tube, then starts to increase and gets to the maximum at optimum pressure value in the air tube; and then it starts to decrease again as the pressure in the air cylinder gets too low.



Serious. Solid. Impact.

10-Shot, Side Lever Models

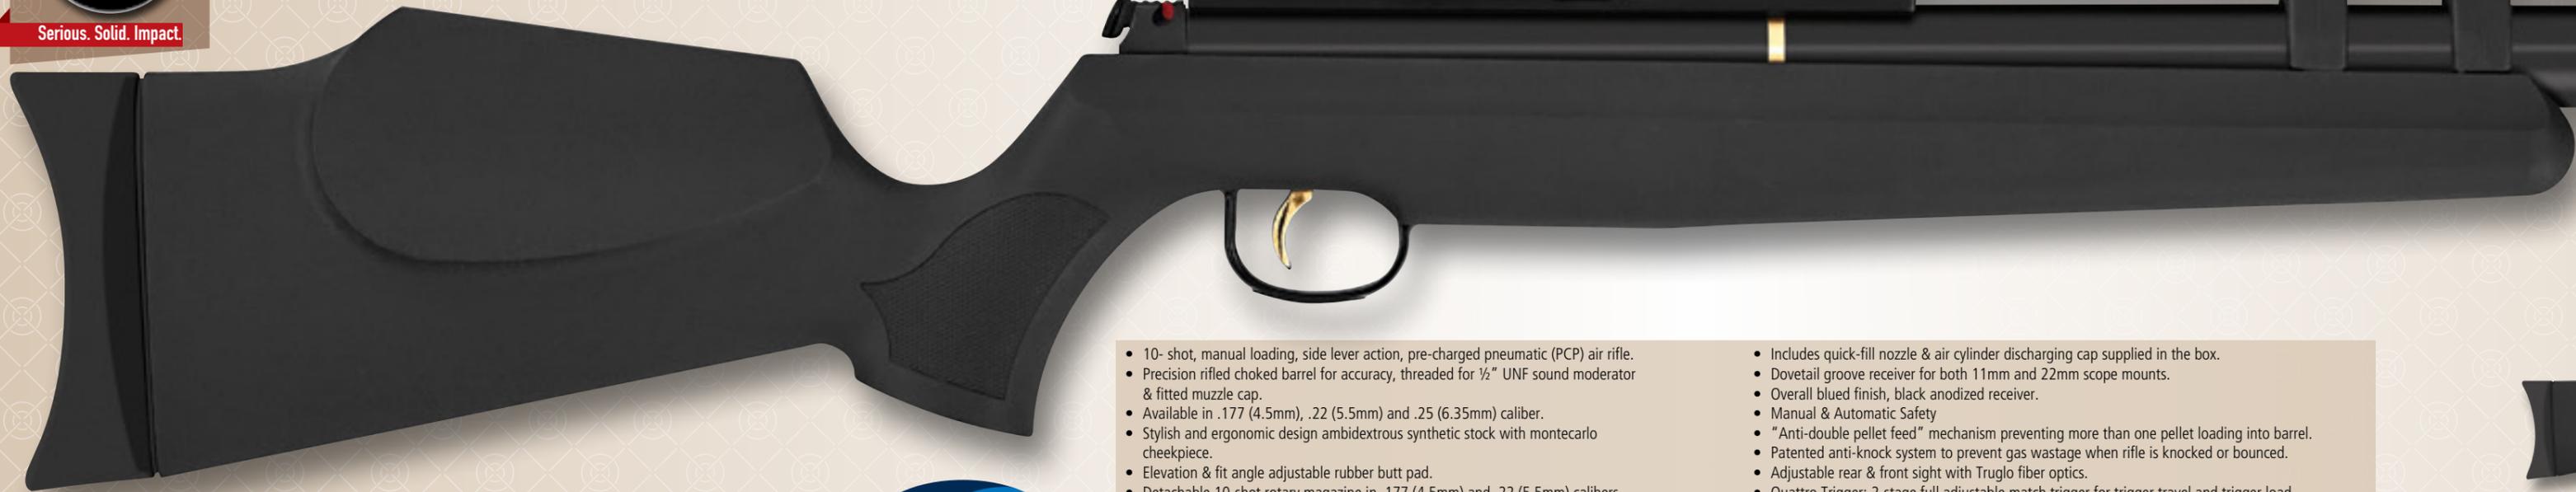

1070fps POWER!

AT44S-10

- 10-shot, manual loading, side lever action, pre-charged pneumatic (PCP) air rifle.
- Precision rifled choked barrel for accuracy, threaded for 1/2" UNF sound moderator & fitted muzzle cap.
- Available in .177 (4.5mm), .22 (5.5mm) and .25 (6.35mm) caliber.
- Stylish and ergonomic design ambidextrous synthetic stock with montecarlo cheekpiece.
- Elevation & fit angle adjustable rubber butt pad.
- Detachable 10-shot rotary magazine in .177 (4.5mm) and .22 (5.5mm) calibers and 9-shot rotary magazine in 25 (6.35mm) caliber.
- Includes one additional magazine.
- Detachable steel air cylinder tube (180cc). Spare cylinders are available.
- Built-in pressure gauge on the air cylinder to monitor the cylinder pressure.

- Includes quick-fill nozzle & air cylinder discharging cap supplied in the box.
- Dovetail groove receiver for both 11mm and 22mm scope mounts.
- Overall blued finish, black anodized receiver.
- Manual & Automatic Safety
- "Anti-double pellet feed" mechanism preventing more than one pellet loading into barrel.
- Patented anti-knock system to prevent gas wastage when rifle is knocked or bounced.
- Adjustable rear & front sight with Truglo fiber optics.
- Quattro Trigger: 2-stage full adjustable match trigger for trigger travel and trigger load.
- Gold plated metal trigger & metal trigger guard.
- **Long version (AT44S-10 Long) available with 230cc air cylinder tube, 58cm barrel and 100fps (30m/s) more muzzle velocity.**



AT44SX-10

Fixed sound moderator equipped version with no sights. Hatsan recommends Optima 3-12X44ADE scope with AT44SX-10. Available in Camo and MW finish versions.



AT44S-10 CAMO

Mossy Oak New Break Up camo version.



AT44S-10 MW

Stock luxurious walnut woodgrain camo version.



AT44S-10 Long

Long version with 230cc air cylinder tube, 58cm barrel and 100fps (30m/s) more muzzle velocity. Available in Camo and MW finish versions.



- Manual & Auto Safety.
- Scope mount rail for both 11 mm and 22 mm scope mounts.
- 10-shot magazine (9-shot magazine in .25 (6.35mm) caliber)
- Micro adjustable rear sight.

- Quattro Trigger: 2-stage full adjustable match trigger for trigger travel and trigger load.
- Gold plated trigger blade



Elevation & fit angle adjustable rubber butt pad.



TRUGLO Adjustable front sight

1/2" UNF threaded muzzle and fitted muzzle cap.

Detachable 180cc air cylinder for 200 bar fill pressure with built in pressure gauge. (230cc air cylinder in long version).

Model	Caliber	Max. Muzzle Velocity (*)	Energy (*)		Magazine Capacity	Air Tube Volume	Fill Pressure	Shots per fill	Stock	Overall Length	Barrel Length	Weight	Fiber Optic Sights Diameters	
			Joules	ft.lbs									Rear Sight	Front Sight
AT44S-10	4.5mm / .177cal	325m/s (1070fps)	30	22	10	180cc	200 BAR	80	Advanced polymer, montecarlo cheekpiece, adjustable butt pad.	990mm (39")	490mm (19.3")	3.2kg (7lbs)	0.9mm (.035") green	1.5mm (.060") red
	5.5mm / .22cal	295m/s (970fps)	42	31	10	180cc	200 BAR	70						
	6.35mm / .25cal	265m/s (870fps)	46	34	9	180cc	200 BAR	60						
AT44S-10 Long	4.5mm / .177cal	355m/s (1170fps)	36	27	10	230cc	200 BAR	80	Advanced polymer, montecarlo cheekpiece, adjustable butt pad.	1085mm (42.7")	585mm (23")	3.6kg (7.9lbs)	0.9mm (.035") green	1.5mm (.060") red
	5.5mm / .22cal	325m/s (1070fps)	51	38	10	230cc	200 BAR	70						
	6.35mm / .25cal	295m/s (970fps)	57	42	9	230cc	200 BAR	60						

* Above maximum muzzle velocity figures may differ depending on the pellet weight & shape.

* The energy restriction of a particular country can be achieved by the reduction in the muzzle velocity. The above maximum velocity figures are obtained when there is no energy restriction on the air rifle and when measured at optimum pressure value in the air tube. As a nature of PCP air rifles the velocity starts low at maximum pressure level in the air tube, then starts to increase and gets to the maximum at optimum pressure value in the air tube; and then it starts to decrease again as the pressure in the air cylinder gets too low.



Serious. Solid. Impact.

10-Shot, Pump Action Models

1070fps POWER!



AT44 PA



AT44PAX

Fixed sound moderator equipped version with no sights. Hatsan recommends Optima 3-12x44AOE scope with AT44PAX.



AT44PA Long

Long version with 230cc air cylinder tube, 58cm barrel and 100fps (30m/s) more muzzle velocity.

Model	Caliber	Max. Muzzle Velocity (*)	Energy (*)		Magazine Capacity	Air Tube Volume	Fill Pressure	Shots per fill	Stock	Overall Length	Barrel Length	Weight	Fiber Optic Sights Diameters	
			Joules	ft.lbs									Rear Sight	Front Sight
AT44 PA	4.5mm / .177cal	325m/s (1070fps)	30	22	10	180cc	200 BAR	80	Advanced polymer, thumbhole, montecarlo cheekpiece, adjustable butt pad.	990mm (39")	490mm (19.3")	3.8kg (8.4lbs)	0.9mm (.035") green	1.5mm (.060") red
	5.5mm / .22cal	295m/s (970fps)	42	31	10	180cc	200 BAR	70						
	6.35mm / .25cal	265m/s (870fps)	46	34	9	180cc	200 BAR	60						
AT44 PA Long	4.5mm / .177cal	355m/s (1170fps)	36	27	10	230cc	200 BAR	80	Advanced polymer, thumbhole, montecarlo cheekpiece, adjustable butt pad.	1085mm (42.7")	585mm (23")	4.4kg (9.7lbs)	0.9mm (.035") green	1.5mm (.060") red
	5.5mm / .22cal	325m/s (1070fps)	51	38	10	230cc	200 BAR	70						
	6.35mm / .25cal	295m/s (970fps)	57	42	9	230cc	200 BAR	60						

* Above maximum muzzle velocity figures may differ depending on the pellet weight & shape.

* The energy restriction of a particular country can be achieved by the reduction in the muzzle velocity. The above maximum velocity figures are obtained when there is no energy restriction on the air rifle and when measured at optimum pressure value in the air tube. As a nature of PCP air rifles the velocity starts low at maximum pressure level in the air tube, then starts to increase and gets to the maximum at optimum pressure value in the air tube; and then it starts to decrease again as the pressure in the air cylinder gets too low.

- 10-shot, manual loading, pump action, pre-charged pneumatic (PCP) air rifle.
- Precision rifled choked barrel for accuracy, threaded for 1/2" UNF sound moderator & fitted muzzle cap.
- Available in .177 (4.5mm), .22 (5.5mm) and .25 (6.35mm) caliber.
- Thumbhole synthetic ambidextrous stock with montecarlo cheekpiece.
- Elevation & fit angle adjustable rubber butt pad.
- Detachable 10-shot rotary magazine in .177 (4.5mm) and .22 (5.5mm) calibers and 9-shot rotary magazine in 25 (6.35mm) caliber.
- Includes one additional magazine.
- Detachable steel air cylinder tube (180cc). Spare cylinders are available.
- Built-in pressure gauge on the air cylinder to monitor the cylinder pressure.
- Includes quick-fill nozzle & air cylinder discharging cap supplied in the box.
- Dovetail groove receiver for both 11mm and 22mm scope mounts.
- Overall blued finish, black anodized receiver.
- Manual Safety
- "Anti-double pellet feed" mechanism preventing more than one pellet loading into barrel.
- Patented anti-knock system to prevent gas wastage when rifle is knocked or bounced.
- Adjustable rear & front sight with Truglo fiber optics.
- Quattro Trigger: 2-stage full adjustable match trigger for trigger travel and trigger load.
- Gold plated metal trigger & metal trigger guard.
- **Long version (AT44-10 Long) available with 230cc air cylinder tube, 58cm barrel and 100fps (30m/s) more muzzle velocity.**



TRUGLO Adjustable front sight. 1/2" UNF threaded muzzle and fitted muzzle cap.

Detachable 180cc air cylinder for 200 bar fill pressure with built in pressure gauge. (230cc air cylinder in long version).



Serious. Solid. Impact.

Single Shot, Side Lever Models

1070fps POWER!



AT44 W



AT44WX

Fixed sound moderator equipped version with no sights. Hatsan recommends Optima 3-12x44AOE scope with AT44WX.



AT44W Long

Long version with 230cc air cylinder tube, 58cm barrel and 100fps (30m/s) more muzzle velocity.

Model	Caliber	Max. Muzzle Velocity (*)	Energy (*)		Magazine Capacity	Air Tube Volume	Fill Pressure	Shots per fill	Stock	Overall Length	Barrel Length	Weight	Fiber Optic Sights Diameters	
			Joules	ft.lbs									Rear Sight	Front Sight
AT44 W	4.5mm / .177cal	325m/s (1070fps)	30	22	1	180cc	200 BAR	80	Genuine Turkish walnut, montecarlo cheekpiece, adjustable butt pad.	990mm (39")	490mm (19.3")	3.4kg (7.5lbs)	0.9mm (.035") green	1.5mm (.060") red
	5.5mm / .22cal	295m/s (970fps)	42	31	1	180cc	200 BAR	70						
	6.35mm / .25cal	265m/s (870fps)	46	34	1	180cc	200 BAR	60						
AT44 W Long	4.5mm / .177cal	355m/s (1170fps)	36	27	1	230cc	200 BAR	80	Genuine Turkish walnut, montecarlo cheekpiece, adjustable butt pad.	1085mm (42.7")	585mm (23")	3.8kg (8.3lbs)	0.9mm (.035") green	1.5mm (.060") red
	5.5mm / .22cal	325m/s (1070fps)	51	38	1	230cc	200 BAR	70						
	6.35mm / .25cal	295m/s (970fps)	57	42	1	230cc	200 BAR	60						

* Above maximum muzzle velocity figures may differ depending on the pellet weight & shape.

* The energy restriction of a particular country can be achieved by the reduction in the muzzle velocity. The above maximum velocity figures are obtained when there is no energy restriction on the air rifle and when measured at optimum pressure value in the air tube. As a nature of PCP air rifles the velocity starts low at maximum pressure level in the air tube, then starts to increase and gets to the maximum at optimum pressure value in the air tube; and then it starts to decrease again as the pressure in the air cylinder gets too low.

- Single shot, manual loading, side lever action, pre-charged pneumatic (PCP) air rifle.
- Precision rifled choked barrel for accuracy, threaded for 1/2" UNF sound moderator & fitted muzzle cap.
- Available in .177 (4.5mm), .22 (5.5mm) and .25 (6.35mm) caliber.
- Genuine Turkish walnut ambidextrous stock with montecarlo cheekpiece.
- Elevation & fit angle adjustable rubber butt pad.
- Detachable steel air cylinder tube (180cc). Spare cylinders are available.
- Built-in pressure gauge on the air cylinder to monitor the cylinder pressure.
- Includes quick-fill nozzle & air cylinder discharging cap supplied in the box.
- Dovetail groove receiver for both 11mm and 22mm scope mounts.
- Overall blued finish, black anodized receiver.
- Manual & Automatic Safety
- "Anti-double pellet feed" mechanism preventing more than one pellet loading into barrel.
- Patented anti-knock system to prevent gas wastage when rifle is knocked or bounced.
- Adjustable rear & front sight with Truglo fiber optics.
- Quattro Trigger: 2-stage full adjustable match trigger for trigger travel and trigger load.
- Gold plated metal trigger & metal trigger guard.
- **Long version available (AT44W Long) with 230cc air cylinder tube, 58cm barrel and 100fps (30m/s) more muzzle velocity.**



• Manual & Auto Safety.
• Scope mount rail for both 11mm and 22mm scope mounts.
• Micro adjustable rear sight.

• Quattro Trigger: 2-stage full adjustable match trigger for trigger travel and trigger load.
• Gold plated trigger blade



Serious. Solid. Impact.

Single Shot, Side Lever Models



1070fps POWER!

AT44

- Single shot, manual loading, side lever action, pre-charged pneumatic (PCP) air rifle.
- Precision rifled choked barrel for accuracy, threaded for 1/2" UNF sound moderator & fitted muzzle cap.
- Available in .177 (4.5mm), .22 (5.5mm) and .25 (6.35mm) caliber.
- Thumbhole synthetic ambidextrous stock.
- Elevation adjustable comb which can be easily adjusted by a coin.
- Elevation & fit angle adjustable rubber butt pad.
- Detachable steel air cylinder tube (180cc). Spare cylinders are available.
- Built-in pressure gauge on the air cylinder to monitor the cylinder pressure.
- Includes quick-fill nozzle & air cylinder discharging cap supplied in the box.

- Dovetail groove receiver for both 11mm and 22mm scope mounts.
- Overall blued finish, black anodized receiver.
- Manual & Automatic Safety
- "Anti-double pellet feed" mechanism preventing more than one pellet loading into barrel.
- Patented anti-knock system to prevent gas wastage when rifle is knocked or bounced.
- Adjustable rear & front sight with Truglo fiber optics.
- Quattro Trigger: 2-stage full adjustable match trigger for trigger travel and trigger load.
- Gold plated metal trigger & metal trigger guard.
- **Long version (AT44 Long) available with 230cc air cylinder tube, 58cm barrel and 100fps (30m/s) more muzzle velocity.**



AT44X

Fixed sound moderator equipped version with no sights. Hatsan recommends Optima 3-12x44AOE scope with AT44X. Available in Camo and MW finish versions.



AT44 CAMO

Mossy Oak New Break Up camo version.



AT44 MW

Stock luxurious walnut woodgrain camo version.



AT44 Long

Long version with 230cc air cylinder tube, 58cm barrel and 100fps (30m/s) more muzzle velocity. Available in Camo and MW finish versions.

Model	Caliber	Max. Muzzle Velocity (*)	Energy (*)		Magazine Capacity	Air Tube Volume	Fill Pressure	Shots per fill	Stock	Overall Length	Barrel Length	Weight	Fiber Optic Sights Diameters	
			Joules	ft.lbs									Rear Sight	Front Sight
AT44	4.5mm / .177cal	325m/s (1070fps)	30	22	1	180cc	200 BAR	80	Advanced polymer, thumbhole, elevation adjustable comb, adjustable butt pad.	990mm (39")	490mm (19.3")	3.1kg (6.8lbs)	0.9mm (.035") green	1.5mm (.060") red
	5.5mm / .22cal	295m/s (970fps)	42	31	1	180cc	200 BAR	70						
	6.35mm / .25cal	265m/s (870fps)	46	34	1	180cc	200 BAR	60						
AT44 Long	4.5mm / .177cal	355m/s (1170fps)	36	27	1	230cc	200 BAR	80	Advanced polymer, thumbhole, elevation adjustable comb, adjustable butt pad.	1085mm (42.7")	585mm (23")	3.5kg (7.7lbs)	0.9mm (.035") green	1.5mm (.060") red
	5.5mm / .22cal	325m/s (1070fps)	51	38	1	230cc	200 BAR	70						
	6.35mm / .25cal	295m/s (970fps)	57	42	1	230cc	200 BAR	60						

* Above maximum muzzle velocity figures may differ depending on the pellet weight & shape.

* The energy restriction of a particular country can be achieved by the reduction in the muzzle velocity. The above maximum velocity figures are obtained when there is no energy restriction on the air rifle and when measured at optimum pressure value in the air tube. As a nature of PCP air rifles the velocity starts low at maximum pressure level in the air tube, then starts to increase and gets to the maximum at optimum pressure value in the air tube; and then it starts to decrease again as the pressure in the air cylinder gets too low.



- Manual & Auto Safety.
- Scope mount rail for both 11 mm and 22 mm scope mounts.
- Micro adjustable rear sight.

- Quattro Trigger: 2-stage full adjustable match trigger for trigger travel and trigger load.
- Gold plated trigger blade



- Elevation adjustable comb which can be easily adjusted by a coin.
- Elevation & fit angle adjustable rubber butt pad.



TRUGLO
Adjustable front sight

1/2" UNF threaded muzzle and fitted muzzle cap.

Detachable 180cc air cylinder for 200 bar fill pressure with built in pressure gauge. (230cc air cylinder in long version).



Serious. Solid. Impact.

Single Shot, Side Lever Models



1070fps POWER!

AT44S

- Single shot, manual loading, side lever action, pre-charged pneumatic (PCP) air rifle.
- Precision rifled choked barrel for accuracy, threaded for 1/2" UNF sound moderator & fitted muzzle cap.
- Available in .177 (4.5mm), .22 (5.5mm) and .25 (6.35mm) caliber.
- Stylish and ergonomic design ambidextrous synthetic stock with montecarlo cheekpiece.
- Elevation & fit angle adjustable rubber butt pad.
- Detachable steel air cylinder tube (180cc). Spare cylinders are available.
- Built-in pressure gauge on the air cylinder to monitor the cylinder pressure.

- Standard quick-fill nozzle & air cylinder discharging cap supplied in the box.
- Dovetail groove receiver for both 11mm and 22mm scope mounts.
- Overall blued finish, black anodized receiver.
- Manual & Automatic Safety
- "Anti-double pellet feed" mechanism preventing more than one pellet loading into barrel.
- Patented anti-knock system to prevent gas wastage when rifle is knocked or bounced.
- Adjustable rear & front sight with Truglo fiber optics.
- Quattro Trigger: 2-stage full adjustable match trigger for trigger travel and trigger load.
- Gold plated metal trigger & metal trigger guard.
- **Long version (AT44S-10 Long) available with 230cc air cylinder tube, 58cm barrel and 100fps (30m/s) more muzzle velocity.**

- Manual & Auto Safety.
- Scope mount rail for both 11 mm and 22 mm scope mounts.
- Micro adjustable rear sight.



- Quattro Trigger: 2-stage full adjustable match trigger for trigger travel and trigger load.
- Gold plated trigger blade



Elevation & fit angle adjustable rubber butt pad.



TRUGLO Adjustable front sight

1/2" UNF threaded muzzle and fitted muzzle cap.

Detachable 180cc air cylinder for 200 bar fill pressure with built in pressure gauge. (230cc air cylinder in long version).



AT44SX

Fixed sound moderator equipped version with no sights. Hatsan recommends Optima 3-12x44AOE scope with AT44SX. Available in Camo and MW finish versions.



AT44S CAMO

Mossy Oak New Break Up camo version.



AT44S MW

Stock luxurious walnut woodgrain camo version.



AT44S Long

Long version with 230cc air cylinder tube, 58cm barrel and 100fps (30m/s) more muzzle velocity. Available in Camo and MW finish versions.

Model	Caliber	Max. Muzzle Velocity (*)	Energy (*)		Magazine Capacity	Air Tube Volume	Fill Pressure	Shots per fill	Stock	Overall Length	Barrel Length	Weight	Fiber Optic Sights Diameters	
			Joules	ft.lbs									Rear Sight	Front Sight
AT44 S	4.5mm / .177cal	325m/s (1070fps)	30	22	1	180cc	200 BAR	80	Advanced polymer, montecarlo cheekpiece, adjustable butt pad.	990mm (39")	490mm (19.3")	3kg (6.6lbs)	0.9mm (.035") green	1.5mm (.060") red
	5.5mm / .22cal	295m/s (970fps)	42	31	1	180cc	200 BAR	70						
	6.35mm / .25cal	265m/s (870fps)	46	34	1	180cc	200 BAR	60						
AT44 S Long	4.5mm / .177cal	355m/s (1170fps)	36	27	1	230cc	200 BAR	80	Advanced polymer, montecarlo cheekpiece, adjustable butt pad.	1085mm (42.7")	585mm (23")	3.4kg (7.5lbs)	0.9mm (.035") green	1.5mm (.060") red
	5.5mm / .22cal	325m/s (1070fps)	51	38	1	230cc	200 BAR	70						
	6.35mm / .25cal	295m/s (970fps)	57	42	1	230cc	200 BAR	60						

* Above maximum muzzle velocity figures may differ depending on the pellet weight & shape.

* The energy restriction of a particular country can be achieved by the reduction in the muzzle velocity. The above maximum velocity figures are obtained when there is no energy restriction on the air rifle and when measured at optimum pressure value in the air tube. As a nature of PCP air rifles the velocity starts low at maximum pressure level in the air tube, then starts to increase and gets to the maximum at optimum pressure value in the air tube; and then it starts to decrease again as the pressure in the air cylinder gets too low.



Serious. Solid. Impact.

PCP Accessories



Sound Moderator

- Reduces the sound significantly.
- 1/2" UNF threaded and easily mountable on the muzzle.
- Made of aluminum alloy and light in weight.



Extended Muzzle Break

- Extended & ported muzzle break for a different look.
- 1/2" UNF threaded and easily mountable on the muzzle.



Air Stripper

Air stripper helps to get better accuracy and grouping by decreasing the air turbulence at the muzzle as the pellet leaves the muzzle.



Hatsan Hand Pump

- The most convenient and affordable way to charge your PCP air rifle.
- Maximum 200 bar fill pressure.
- Ergonomically designed handle with synthetic cover.
- Built-in moisture trap embedded in the handle which traps the moisture and protects your pump & air rifle.
- Built-in particle filter embedded in the handle which traps the dust & dirt and protects your pump & air rifle.
- Additional compartment in the other handle where you can put spare parts and O-rings of the pump or small belongings.
- Built-in precise pressure gauge embedded in the frame which protects it from external impacts.
- Easily demountable design.
- Specialist design wide foot plate with adjustable pumping angle.
- Comes with hose and connector.

Additional Compartment

Built-in moisture trap & particle filter



PCP Bipod

- Elevation adjustable legs
- Integrated picatinny rail mount
- Fits all Hatsan PCP air rifles having picatinny rail beneath the forearm



Air Tube Cylinder

- Detachable air cylinder
- Maximum fill pressure 200 bar.
- Easily screws in to the all Hatsan AT44 PCP series air rifles.
- Possibility of refilling the air tube while on the rifle or detached.



Hatsan Charging Kit

Designed to fill air into the air cylinder of your PCP from scuba tanks. The quickest method to fill your PCP.



Hatsan PCP Bag

Special design bag fitting all Hatsan PCP air rifles. Made of quality and waterproof material and can carry your air rifle with scope mounted.



Galatian Magazine

Spare magazines for Galatian PCP air rifles are available in 16 shot in .177 (4.5mm), 14 shot in .22 (5.5mm) and 13 shot in .25 (6.35mm) caliber.

10-shot Magazine

- Easily mounts to all AT44 & BT65 10-shot PCP series air rifles.
- Light in weight and made of aluminum.
- Spare 10-shot magazines are available in 177 (4.5mm) and .22 (5.5mm) calibers.
- Spare 9-shot magazines are available in .25 (6.35mm) caliber

Hatsan Pointed Head Pellets

High performance, accurate and precise for pest control and precision shooting at larger distances. Pointed head & waisted design lead pellets providing maximum penetration on the target. Hatsan pointed head pellets are available in .177 (4.5mm), .22 (5.5mm) and .25 (6.35mm) calibers.




- .177 (4.5mm) caliber Hatsan pointed head pellets. 200 pellets per tin. Weight: 0.545grams / 8.41grains.
- .22 (5.5mm) caliber Hatsan pointed head pellets. 300 pellets per tin. Weight: 0.910 grams / 14grains.
- .25 (6.35mm) caliber Hatsan pointed head pellets. 200 pellets per tin. Weight: 1,61grams / 24,85 grains.



Hatsan Plastic Case

Designed for Hatsan PCP air rifles.



Red illuminated reticle

OPTIMA 3-12x44AOE Scope

- Adjustable objective, red illuminated reticle, aluminum frame scope. Comes with 11mm ring mounts.

Model	Magnification OBJ.DIA.	Objective Diameter	Tube Diameter	Exit Pupil	Field of View	Eye Relief	Length	Weight
Optima 3-12x44AOE Scope	3X-12X	44 mm 1.7"	25.4 mm 1"	14.6 - 3.67 0.57" - 0.14"	7.32' - 33.63'	82-87 mm 3.22"-3.4"	330 mm 12.9"	500 grams 17.6 ounce

Hatsan Torpedo Pellets

Outmost penetrative and bullet shaped design providing supremely accurate results on target. The large dome makes a larger hole while the thinner body ensures less friction so the pellet will penetrate further for the same amount of power. 26% better penetrative power than a domed pellet and 14% better than a pointed diabolo pellet. Hatsan Torpedo pellets are available in .177 (4.5 mm) and .22 (5.5 mm).



- .177 (4.5mm) caliber Hatsan Torpedo pellets. 450 pellets per box. Weight: 0.62grams / 9.5grains.
- .22 (5.5mm) caliber Hatsan Torpedo pellets. 350 pellets per box. Weight: 1.323 grams / 20.5grains.

Serious. Solid. Impact.



HATSAN PCP AIR RIFLES



facebook.com/hatsan.com.tr



twitter.com/hatsan_arms



youtube.com/hatsanarms



HATSAN
ARMS COMPANY

Serious. Solid. Impact.

Izmir - Ankara Karayolu 26. km. No. 289

OSB Kemalpaşa, 35170 Izmir - TURKEY

Tel: +90 (232) 878 91 00

Fax: +90 (232) 878 91 02 - 878 97 23

info@hatsan.com.tr



www.hatsan.com.tr