

Superpoly STP345 - 24/Vfk

STP340 - 24/Vfk

STP335 - 24/Vfk



345 Watt

DOUBLE GLASS SOLAR MODULE



Features



High module conversion efficiency

Module efficiency up to 17.7% achieved through advanced cell technology and manufacturing capabilities



PID Free

Potential induced degradation (PID) free guaranteed



Positive tolerance

Guaranteed positive tolerance of 5 W delivers higher output



Suntech current sorting process

System output maximized by reducing mismatch losses up to 2% with modules sorted & packaged by amperage



Extended wind and snow load tests

Module certified to withstand extreme wind (2400 Pascal) and snow loads (2400 Pascal) *



High system voltage Compatible

Maximum 1500 V DC system voltage reduces total system cost

Certifications and standards:
IEC 61215, IEC 61730, conformity to CE



Trust Suntech to Deliver Reliable Performance Over Time

- World-class manufacturer of crystalline silicon photovoltaic modules
- Unrivaled manufacturing capacity and world-class technology
- Rigorous quality control meeting the highest international standards: ISO 9001: 2008, ISO 14001: 2004 and ISO17025: 2005
- Regular independently checked production process from international accredited institute/company
- Long-term reliability tests
- 2 x 100% EL inspection ensuring defect-free modules

Special distributed junction box design, reduce line losses.



Left




Middle



Right

Industry-leading Warranty based on nominal power

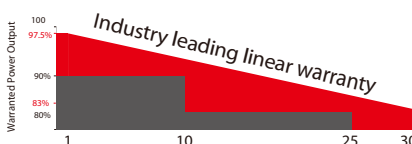

- 97.5% in the first year, thereafter, for years two (2) through thirty (30), 0.5% maximum decrease from MODULE's nominal power output per year, ending with the 83% in the 30th year after the defined WARRANTY STARTING DATE.**
- 12-year product warranty
- 30-year linear performance warranty

IP68

IP68 Rated Junction Box


The Suntech IP68 rated junction box ensures an outstanding waterproof level, supports installations in all orientations and reduces stress on the cables. High reliable performance, low resistance connectors ensure maximum output for the highest energy production.

* Please refer to Suntech Double Glass Module Installation Manual for details.

** Please refer to Suntech Product Near-coast Installation Manual for details.

*** Please refer to Suntech Product Warranty for details.

Superpoly STP345 - 24/Vfk STP340 - 24/Vfk STP335 - 24/Vfk

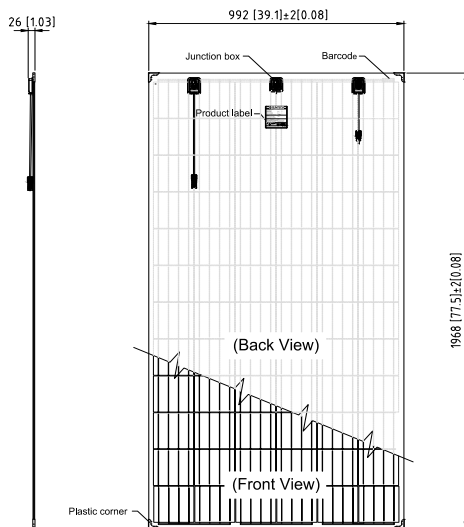

Electrical Characteristics


STC	STP345-24/Vfk	STP340-24/Vfk	STP335-24/Vfk
Maximum Power at STC (Pmax)	345 W	340 W	335 W
Optimum Operating Voltage (Vmp)	38.1 V	37.9 V	37.7 V
Optimum Operating Current (Imp)	9.06 A	8.98 A	8.89 A
Open Circuit Voltage (Voc)	46.9 V	46.8 V	46.5 V
Short Circuit Current (Isc)	9.69 A	9.63 A	9.51 A
Module Efficiency	17.7%	17.4%	17.2%
Operating Module Temperature	-40 °C to +85 °C		
Maximum System Voltage	1500 V DC (IEC)		
Maximum Series Fuse Rating	20 A		
Power Tolerance	0/+5 W		

STC: Irradiance 1000 W/m², module temperature 25 °C, AM=1.5;
Best in Class AAA solar simulator (IEC 60904-9) used, power measurement uncertainty is within +/- 3%

NOCT	STP345-24/Vfk	STP340-24/Vfk	STP335-24/Vfk
Maximum Power at NOCT (Pmax)	254.5 W	251.0 W	247.1 W
Optimum Operating Voltage (Vmp)	34.7 V	34.5 V	34.4 V
Optimum Operating Current (Imp)	7.33 A	7.28 A	7.19 A
Open Circuit Voltage (Voc)	43.2 V	43.1 V	42.8 V
Short Circuit Current (Isc)	7.86 A	7.81 A	7.71 A

NOCT: Irradiance 800 W/m², ambient temperature 20 °C, AM=1.5, wind speed 1 m/s;
Best in Class AAA solar simulator (IEC 60904-9) used, power measurement uncertainty is within +/- 3%

Current-Voltage & Power-Voltage Curve (345)

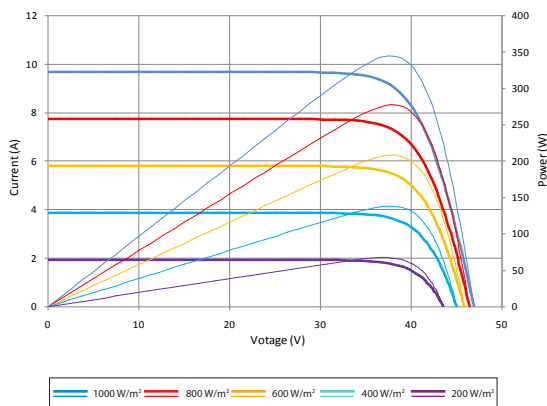


Temperature Characteristics

Nominal Operating Cell Temperature (NOCT)	45±2°C
Temperature Coefficient of Pmax	-0.41 %/°C
Temperature Coefficient of Voc	-0.33 %/°C
Temperature Coefficient of Isc	0.067 %/°C

Mechanical Characteristics

Solar Cell	Polycrystalline silicon 6 inches
No. of Cells	72 (6 × 12)
Dimensions	1968 × 992 × 6 mm
Weight	28.5 kgs
Front/Back Glass	2.5 mm tempered glass
Junction Box	IP68 rated
Output Cables	4.0 mm ² (0.006 inches ²), unsymmetrical lengths (-) 350mm (13.78 inches) and (+) 160 mm (6.3 inches)
Connectors	MC4 compatible

Dealer information



Product specification is subjected to change for improvement.
Information on how to install and operate this product is available in the installation instruction. All values indicated in this data sheet are subject to change without prior announcement. The specifications may vary slightly. All specifications are in accordance with standard EN 50380. Color differences of the modules relative to the figures as well as discolorations of/in the modules which do not impair their proper functioning are possible and do not constitute a deviation from the specification.

Packing Configuration

Container	20' GP	40' HC
Pieces per pallet	33	33
Pallets per container	5	22
Pieces per container	165	726