

wineo

THAT'S FLOORING



DESIGN FLOORING

NEW!
Now with
wineo 400

**CONFIDENT IN STYLE.
LIVING AND WORKING.**

THAT'S FLOORING

CONTENTS

Product advantages	06
Application areas	08
Product composition	10
Formats	14
Surfaces	16

Collections

wineo 400	18
wineo 600	30
wineo 800	42

Accessories	60
Service	62
Awards & Quality	64

Collection overview	66
Symbols	69

wineo 400

NEW!

CONFIDENT IN STYLE. FEELING AT HOME.

With the wineo 400, you can incorporate the latest global trends into your very own home – with unique designs and formats, as well as wood and stone styling options. For unlimited design possibilities and a personalised atmosphere in your home. The wineo 400 wood XL's special feature is that it is the first HDF XL Multi-Layer variant with a registered embossed surface on the market.



CONFIDENT IN STYLE.

Where do we find inspiration? Where can we feel the spirit of the times? Our designers were looking for the latest trends - with the aim of creating extraordinary collections that are characterised in particular: by confidence in style.

The design flooring by wineo gives every room a special flair. It derives its inspiration from the warmth of nature or the cool concrete facades of fascinating cities. It convinces with its design and functionality for residential and commercial buildings.



PRODUCT ADVANTAGES

The permanently elastic wineo Design Flooring is impressively functional. Offering numerous product advantages and ease of use, it is a true favourite.



DURABLE

wineo Design Flooring is **non-staining**. Even furniture and chair castors leave no trace.



EASY CARE

Thanks to the sealed finish, the design flooring is very **easy to clean**.



QUIET

The soft surface ensures **pleasant room acoustics**.



WARM TO THE FEET

The design flooring feels **pleasantly warm** and is ideally suitable for lying, playing and living on.



SUITABLE FOR UNDERFLOOR HEATING

Installed on underfloor heating, the design flooring conveys an extra sense of **cosy warmth**.



SUITABLE FOR DAMP AREAS

All wineo Design Flooring for gluing or clicking in are perfectly suitable for damp rooms, such as the kitchen or bathroom, as they **do not swell on contact with water**.



GENTLE ON THE ANKLES

Thanks to the **elastic surface**, the joints are protected.



SLIP-RESISTANT


The **tested surface** is reliably safe with every step.

APPLICATION AREAS

The wineo Design Flooring for gluing and clicking in, with utilisation classes between 23 and 42, is always the right choice – for domestic areas as much as for public buildings or the light industrial sector. Product thicknesses of 2 mm to 9 mm make it possible to install the design floor on virtually any technically adequate subsurface.

i

All wineo Design Flooring is ideal for damp areas.

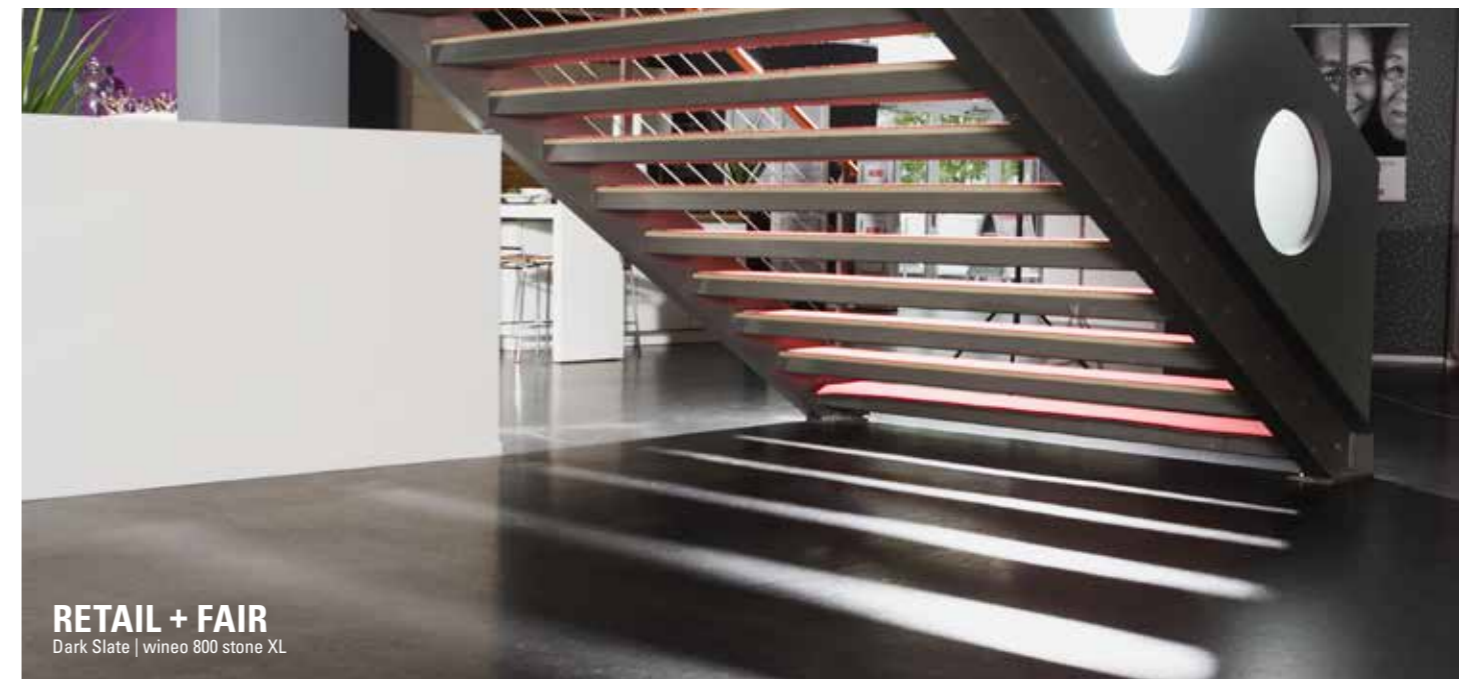




PRODUCT COMPOSITION

Design flooring from wineo is just as varied as your requirements. Whether you are looking for flooring for a new building, renovation, at home or for commercial use – wineo has the right product for you.

DESIGN FLOORING FOR GLUING



- very elastic
- minimal thickness of 2 mm to 2.5 mm
- particularly durable and long-lasting
- ideal for refurbishment work and damp areas

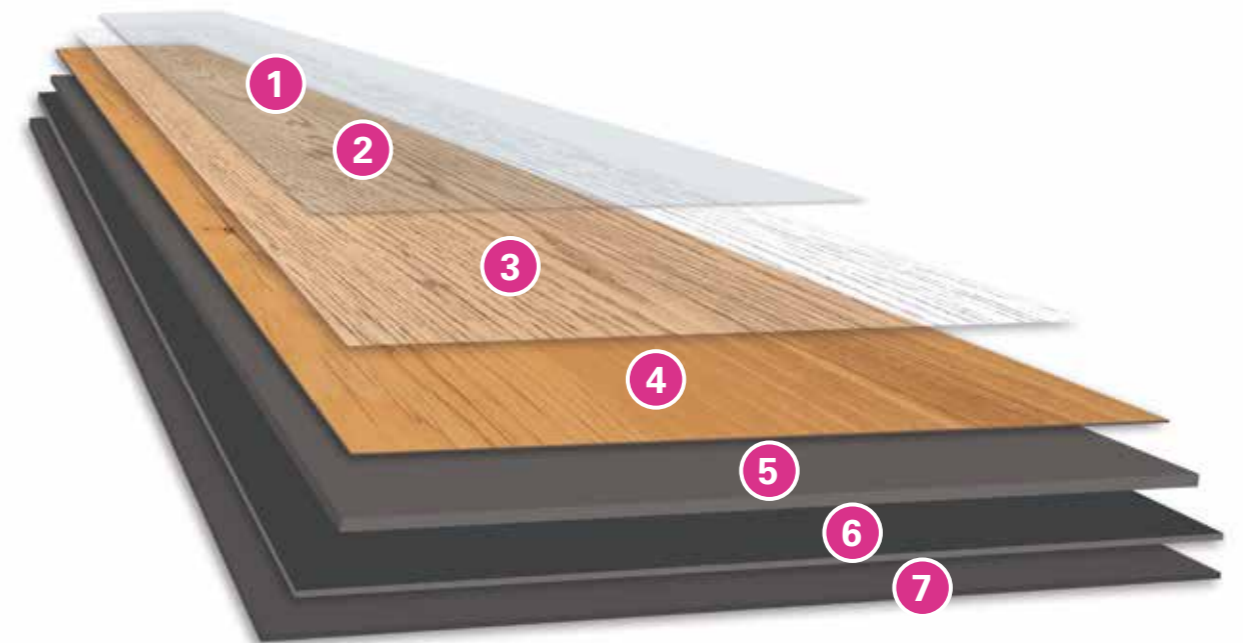


- 1 Surface seal**
Protects the product and enables easy cleaning and maintenance.
- 2 Surface texture**
A range of surface textures ensure an authentic feel and appearance.
- 3 Wear layer**
Guarantees a high level of durability and is the basis for categorising flooring into the respective application areas.
- 4 Design**
The decor film offers a host of design options.
- 5 Base layer**
Lends the product a high level of dimensional stability and optimum point-load resistance.
- 6 Backing**
With its waffle back texture, it is used to help ensure balance and optimal installation.
- 7 Insulation mat**
Available separately: the silentPREMIUM self-adhesive insulation mat for bridging any unevenness and reducing walking and impact noise levels.

DESIGN FLOORING FOR CLICKING IN



- very elastic
- available in a thickness of 4.5 mm to 5 mm
- connect locking for a particularly quick and tidy installation

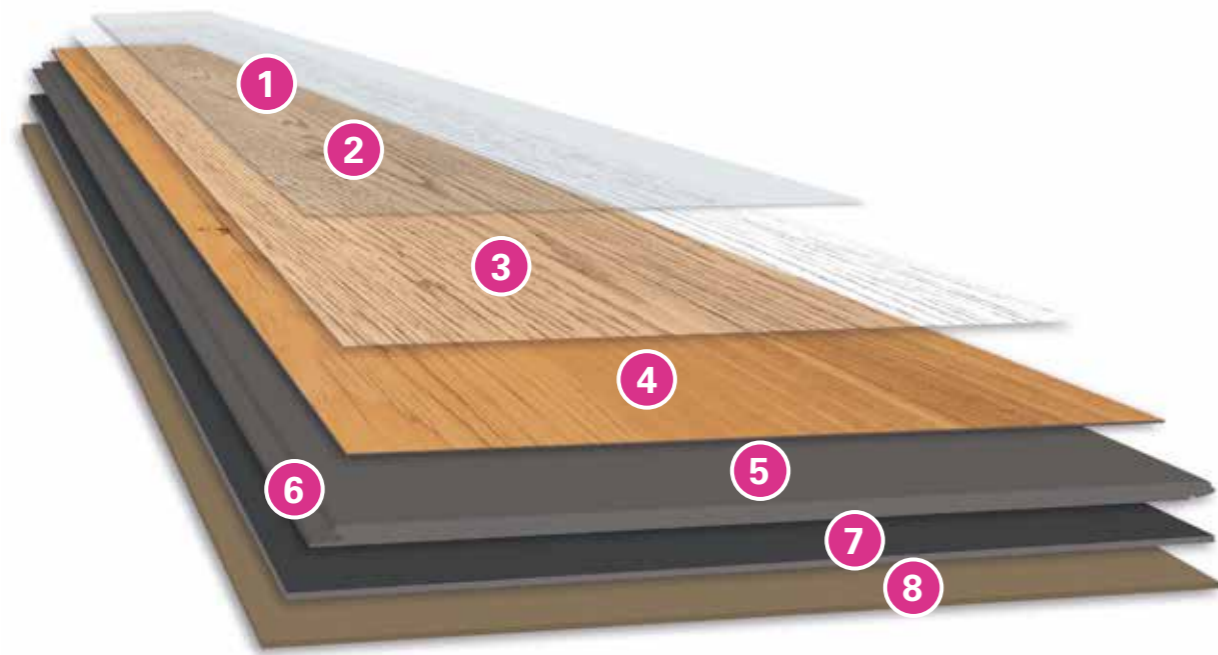

1 Surface seal

Protects the product and enables easy cleaning and maintenance.

2 Surface texture

A range of surface textures ensure an authentic feel and appearance.

3 Wear layer

Guarantees a high level of durability and is the basis for categorising flooring into the respective application areas.

4 Design

The decor film offers a host of design options.

5 Base layer with glass fibre reinforcement

Lends the product an especially high level of dimensional stability and optimum point-load resistance.

6 Profile connection

The Connect locking system was specially developed for elastic design flooring and enables planks to be clicked into each other without any problems.

7 Backing

With its waffle back texture, it is used to help ensure balance and optimal installation.


8 Insulation mat

Available separately: the silentCOMFORT insulation mat with non-slip effect for bridging any unevenness and reducing walking and impact noise levels.

MULTI-LAYER DESIGN FLOORING FOR CLICKING IN



- design flooring surface on Aqua-Protect® HDF core board
- 9 mm thick for optimally bridging any unevenness in the substrate
- ideal for refurbishment work and damp areas
- particularly heat-resistant and dimensionally stable
- integrated Sound-Protect insulation mat for reducing walking and impact sound levels
- LocTec® locking for easy installation

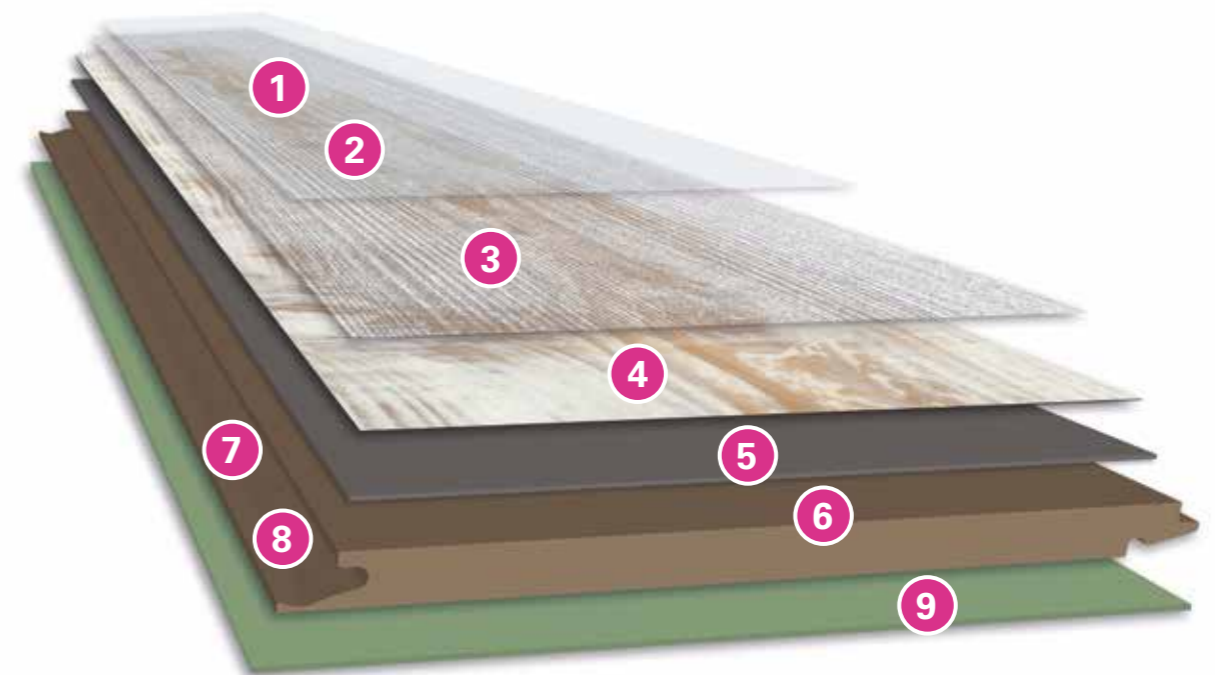

1 Surface seal

Protects the product and enables easy cleaning and maintenance.

2 Surface texture

A range of surface textures ensure an authentic feel and appearance.

3 Wear layer

Guarantees a high level of durability and is the basis for categorising flooring into the respective application areas.

4 Design

The decor film offers a host of design options.

5 Base layer

Lends the product a high level of dimensional stability and optimum point-load resistance.

6 Core board

The HDF Aqua-Protect® core board is swell-resistant.

7 Profile connection

Thanks to the tried-and-tested LocTec® locking system, planks can be clicked into one other without any problems.

8 Profile seal




A special profile seal protects the entire connection system from moisture.

9 Insulation mat




The walking and impact sound reducing system Sound-Protect Eco is already securely integrated into wineo Multi-Layer flooring.

FORMATS

wood

	Glue	1200 × 180 mm
	Click	1212 × 187 mm
	Multi-Layer	1222 × 182 mm

wood XL

	Glue	1505 × 235 mm
	Click	1507 × 235 mm
	Multi-Layer	1520 × 230 mm

wood




	Glue	1200 × 180 mm
	Click	1212 × 187 mm

DLC00011: 1212 × 185 mm

wood XL



	Glue	1505 × 235 mm
	Click	1505 × 237 mm

stone



	Glue	609.6 × 304.8 mm
	Click	600 × 316 mm
	Multi-Layer	601 × 310 mm

wineo 600

stone

	Glue	609.6 × 304.8 mm
	Click	600 × 317 mm

stone XL

	Glue	900 × 450 mm
	Click	914 × 480 mm



wood

	Glue	1200 × 180 mm
	Click	1212 × 185 mm

wood XL


	Glue	1505 × 235 mm
	Click	1505 × 237 mm


stone XL

	Glue	914.4 × 457.2 mm
	Click	914 × 480 mm

wineo 800


tile

	Glue	457.2 × 457.2 mm
---	------	------------------

	Glue	914.4 × 457.2 mm
---	------	------------------

	Glue	914.4 × 914.4 mm
---	------	------------------

craft

	Glue	457.2 × 457.2 mm
---	------	------------------

	Glue	914.4 × 101.6 mm
---	------	------------------

SURFACES

wineo Design Flooring comes in different surfaces, which are designed to suit the decors. Wood structures, for example, ensure that your floor feels particularly authentic. (Please refer to the labelling under the design pictures.)



Fine wooden pore



Rough wood structure



Exclusive wood structure



Sand structure



Rough sawn surface



Stone structure



Slate structure



Travertine



Registered embossed surface



Brushed structure



Handscraped I



Glossy surface

i

Designs with a registered embossed surface look especially authentic, as the surface structure is in sync with the wood grain. The expression of knots and lines in the wood gives the floor its unique originality.

3-in-1

wineo 400

CONFIDENT IN STYLE. FEELING AT HOME.

The wineo 400 is a true all-rounder for your home: every design is available for gluing, clicking in or as a Multi-Layer variant for clicking in – for maximum creative freedom. Discover 18 wood and 10 stone designs as well as 12 wood designs in XL with a high-quality registered embossed surface. The collection is the stylistically assured entry-level variant in the field of design flooring and is ideal for private use.



Dream Pine Light Glue: DB00105
 1 strip | Rough wood structure Click: DLC00105
 Skirting board 19/58: 30060435 (white) Click (Multi-Layer): MLD00105



Moonlight Pine Pale Glue: DB00104
 1 strip | Rough wood structure Click: DLC00104
 Skirting board 19/58: 30060435 (white) Click (Multi-Layer): MLD00104



Inspiration Oak Clear Glue: DB00113
 1 strip | Rough wood structure Click: DLC00113
 Skirting board 19/58: 30060568 Click (Multi-Layer): MLD00113



Compassion Oak Tender Glue: DB00109
 1 strip | Rough wood structure Click: DLC00109
 Skirting board 19/58: 30060435 (white) Click (Multi-Layer): MLD00109



Desire Oak Light Glue: DB00108
 1 strip | Rough wood structure Click: DLC00108
 Skirting board 19/58: 30060563 Click (Multi-Layer): MLD00108



Grace Oak Smooth Glue: DB00106
 1 strip | Rough wood structure Click: DLC00106
 Skirting board 19/58: 30060561 Click (Multi-Layer): MLD00106



Paradise Oak Essential Glue: DB00112
 1 strip | Rough wood structure Click: DLC00112
 Skirting board 19/58: 30060567 Click (Multi-Layer): MLD00112



Energy Oak Warm Glue: DB00114
 1 strip | Rough wood structure Click: DLC00114
 Skirting board 19/58: 30060569 Click (Multi-Layer): MLD00114



Embrace Oak Grey Glue: DB00110
 1 strip | Rough wood structure Click: DLC00110
 Skirting board 19/58: 30060565 Click (Multi-Layer): MLD00110



Spirit Oak Silver Glue: DB00115
 1 strip | Rough wood structure Click: DLC00115
 Skirting board 19/58: 30060570 Click (Multi-Layer): MLD00115



Adventure Oak Rustic Glue: DB00111
 1 strip | Rough wood structure Click: DLC00111
 Skirting board 19/58: 30060566 Click (Multi-Layer): MLD00111



Summer Oak Golden Glue: DB00118
 1 strip | Rough wood structure Click: DLC00118
 Skirting board 19/58: 30060573 Click (Multi-Layer): MLD00118



Starlight Oak Soft Glue: DB00116
 1 strip | Rough wood structure Click: DLC00116
 Skirting board 19/58: 30060571 Click (Multi-Layer): MLD00116



Miracle Oak Dry Glue: DB00117
 1 strip | Rough wood structure Click: DLC00117
 Skirting board 19/58: 30060572 Click (Multi-Layer): MLD00117



Soul Apple Mellow Glue: DB00107
 1 strip | Rough wood structure Click: DLC00107
 Skirting board 19/58: 30060562 Click (Multi-Layer): MLD00107



Romance Oak Brilliant Glue: DB00119
 1 strip | Rough wood structure Click: DLC00119
 Skirting board 19/58: 30060574 Click (Multi-Layer): MLD00119



Eternity = various plank colours in one box



Eternity Oak Grey
1 strip | Rough wood structure
Skirting board 19/58: 30060435 (white)

Glue: DB00121
Click: DLC00121
Click (Multi-Layer): MLD00121



Eternity Oak Brown
1 strip | Rough wood structure
Skirting board 19/58: 30060435 (white)

Glue: DB00120
Click: DLC00120
Click (Multi-Layer): MLD00120



Eternity Oak Grey
wineo 400 wood | DB00121
wineo 400 wood | DLC00121
wineo 400 wood | MLD00121

wineo 400 wood XL

WITH REGISTERED EMBOSSED SURFACE



Emotion Oak Rustic
1 strip | **Registered embossed surface**
Skirting board 19/58: 30060576
Glue: DB00123
Click: DLC00123
Click (Multi-Layer): MLD00123



Luck Oak Sandy
1 strip | **Registered embossed surface**
Skirting board 19/58: 30060580
Glue: DB00127
Click: DLC00127
Click (Multi-Layer): MLD00127



Silence Oak Beige
1 strip | **Registered embossed surface**
Skirting board 19/58: 30060577
Glue: DB00124
Click: DLC00124
Click (Multi-Layer): MLD00124



Kindness Oak Pure
1 strip | **Registered embossed surface**
Skirting board 19/58: 30060578
Glue: DB00125
Click: DLC00125
Click (Multi-Layer): MLD00125



Ambition Oak Calm
1 strip | **Registered embossed surface**
Skirting board 19/58: 30060575
Glue: DB00122
Click: DLC00122
Click (Multi-Layer): MLD00122



Wish Oak Smooth
1 strip | **Registered embossed surface**
Skirting board 19/58: 30060584
Glue: DB00131
Click: DLC00131
Click (Multi-Layer): MLD00131



Liberation Oak Timeless
1 strip | **Registered embossed surface**
Skirting board 19/58: 30060581
Glue: DB00128
Click: DLC00128
Click (Multi-Layer): MLD00128



Joy Oak Tender
1 strip | **Registered embossed surface**
Skirting board 19/58: 30060579
Glue: DB00126
Click: DLC00126
Click (Multi-Layer): MLD00126



Memory Oak Silver
1 strip | **Registered embossed surface**
Skirting board 19/58: 30060585
Glue: DB00132
Click: DLC00132
Click (Multi-Layer): MLD00132



Valour Oak Smokey
1 strip | **Registered embossed surface**
Skirting board 19/58: 30060586
Glue: DB00133
Click: DLC00133
Click (Multi-Layer): MLD00133



Comfort Oak Mellow
1 strip | **Registered embossed surface**
Skirting board 19/58: 30060582
Glue: DB00129
Click: DLC00129
Click (Multi-Layer): MLD00129



Intuition Oak Brown
1 strip | **Registered embossed surface**
Skirting board 19/530060583
Glue: DB00130
Click: DLC00130
Click (Multi-Layer): MLD00130



Harmony Stone Sandy Glue: DB00134
 Sand structure Click: DLC00134 (real joint)
 Skirting board 19/58: 30060435 (white) Click (Multi-Layer): MLD00134



Magic Stone Cloudy Glue: DB00136
 Travertine Click: DLC00136 (real joint)
 Skirting board 19/58: 30060435 (white) Click (Multi-Layer): MLD00136



Patience Concrete Pure Glue: DB00139
 Travertine Click: DLC00139 (real joint)
 Skirting board 19/58: 30060435 (white) Click (Multi-Layer): MLD00139



Wisdom Concrete Dusky Glue: DB00140
 Sand structure Click: DLC00140 (real joint)
 Skirting board 19/58: 30060435 (white) Click (Multi-Layer): MLD00140



Fairytale Stone Pale Glue: DB00142
 Sand structure Click: DLC00142 (real joint)
 Skirting board 19/58: 30060435 (white) Click (Multi-Layer): MLD00142



Fortune Stone Rusty Glue: DB00143
 Travertine Click: DLC00143 (real joint)
 Skirting board 19/58: 30060435 (white) Click (Multi-Layer): MLD00143



Vision Concrete Chill Glue: DB00135
 Sand structure Click: DLC00135 (real joint)
 Skirting board 19/58: 30060435 (white) Click (Multi-Layer): MLD00135



Courage Stone Grey Glue: DB00137
 Sand structure Click: DLC00137 (real joint)
 Skirting board 19/58: 30060435 (white) Click (Multi-Layer): MLD00137



Glamour Concrete Modern Glue: DB00141
 Sand structure Click: DLC00141 (real joint)
 Skirting board 19/58: 30060435 (white) Click (Multi-Layer): MLD00141



Hero Stone Gloomy Glue: DB00138
 Sand structure Click: DLC00138 (real joint)
 Skirting board 19/58: 30060435 (white) Click (Multi-Layer): MLD00138



wineo 600

CONFIDENT IN STYLE. DISPLAYING VARIETY.

With a wear layer of 0.4 mm, wineo 600 for gluing or clicking in is suitable for a broad range of applications. The 24 wood designs and 8 stone looks, some of which have real joints, are not only suitable for commercial property but also for private customers, who appreciate resilient flooring in trendy designs.



Patchwork
2 strip | Rough sawn surface
Skirting board 19/58: 30060435 (white)

Glue: DB00011
Click: DLC00011



Chateau White
1 strip | Rough sawn surface
Skirting board 19/58: 30060448

Glue: DB00001
Click: DLC00001



Polaris
1 strip | Handscraped I
Skirting board 19/58: 30060435 (white)

Glue: DB00012
Click: DLC00012



Chateau Grey
1 strip | Rough sawn surface
Skirting board 19/58: 30060450

Glue: DB00003
Click: DLC00003



Toscany Pine Grey
1 strip | Rough wood structure
Skirting board 19/58: 30060454

Glue: DB00008
Click: DLC00008



Aurelia Grey
1 strip | **Registered embossed surface**
Skirting board 19/58: 30060452

Glue: DB00005
Click: DLC00005



Venero Oak Brown
1 strip | Rough sawn surface
Skirting board 19/58: 30060451

Glue: DB00014
Click: DLC00014



Aurelia Provence
1 strip | **Registered embossed surface**
Skirting board 19/58: 30060451

Glue: DB00004
Click: DLC00004



Toscany Pine
1 strip | Rough wood structure
Skirting board 19/58: 30060454

Glue: DB00007
Click: DLC00007



Calm Oak Nature
1 strip | Handscraped I
Skirting board 19/58: 30060456

Glue: DB00009
Click: DLC00009



Chateau Brown
1 strip | Rough sawn surface
Skirting board 19/58: 30060449

Glue: DB00002
Click: DLC00002



Venero Oak Beige
1 strip | Rough sawn surface
Skirting board 19/58: 30060458

Glue: DB00013
Click: DLC00013



Calm Oak Cream
1 strip | Handscraped I
Skirting board 19/58: 30060457

Glue: DB00010
Click: DLC00010



Aurelia Cream
1 strip | **Registered embossed surface**
Skirting board 19/58: 30060453

Glue: DB00006
Click: DLC00006

wineo 600 wood XL



Aumera Oak Grey*
1 strip | **Registered embossed surface**
Skirting board 19/58: 30060466

Glue: DB00029
Click: DLC00029



Scandic Grey
1 strip | Rough wood structure
Skirting board 19/58: 30060462

Glue: DB00025
Click: DLC00025



Scandic White
1 strip | Rough wood structure
Skirting board 19/58: 30060463

Glue: DB00026
Click: DLC00026



Victoria Oak White*
1 strip | **Registered embossed surface**
Skirting board 19/58: 30060469

Glue: DB00032
Click: DLC00032



Woodstock Cream
1 strip | Rough wood structure
Skirting board 19/58: 30060461

Glue: DB00024
Click: DLC00024



Victoria Oak Native*
1 strip | **Registered embossed surface**
Skirting board 19/58: 30060458

Glue: DB00031
Click: DLC00031



Aumera Oak Native*
1 strip | **Registered embossed surface**
Skirting board 19/58: 30060467

Glue: DB00028
Click: DLC00028



Victoria Oak Grey*
1 strip | **Registered embossed surface**
Skirting board 19/58: 30060467

Glue: DB00030
Click: DLC00030



Woodstock Honey
1 strip | Rough wood structure
Skirting board 19/58: 30060460

Glue: DB00023
Click: DLC00023



Aumera Oak Dark*
1 strip | **Registered embossed surface**
Skirting board 19/58: 30060464

Glue: DB00027
Click: DLC00027



Lava Grey
wineo 600 stone | DB00015
wineo 600 stone | DLC00015



Polar Travertine
Sand structure



Silver Slate
Sand structure
Glue: DB00018
Click: DLC00018 (real joint)



Lava Grey
Sand structure



Lava Black
Sand structure
Glue: DB00016
Click: DLC00016

Glue: DB00017
Click: DLC00017 (real joint)

Glue: DB00015
Click: DLC00015

wineo 600 stone XL



Navajo Cream
Stone structure

Glue: DB00019
Click: DLC00019



Navajo Grey
Stone structure

Glue: DB00020
Click: DLC00020




Brooklyn Day
Stone structure

Glue: DB00021
Click: DLC00021



Brooklyn Night
Stone structure

Glue: DB00022
Click: DLC00022

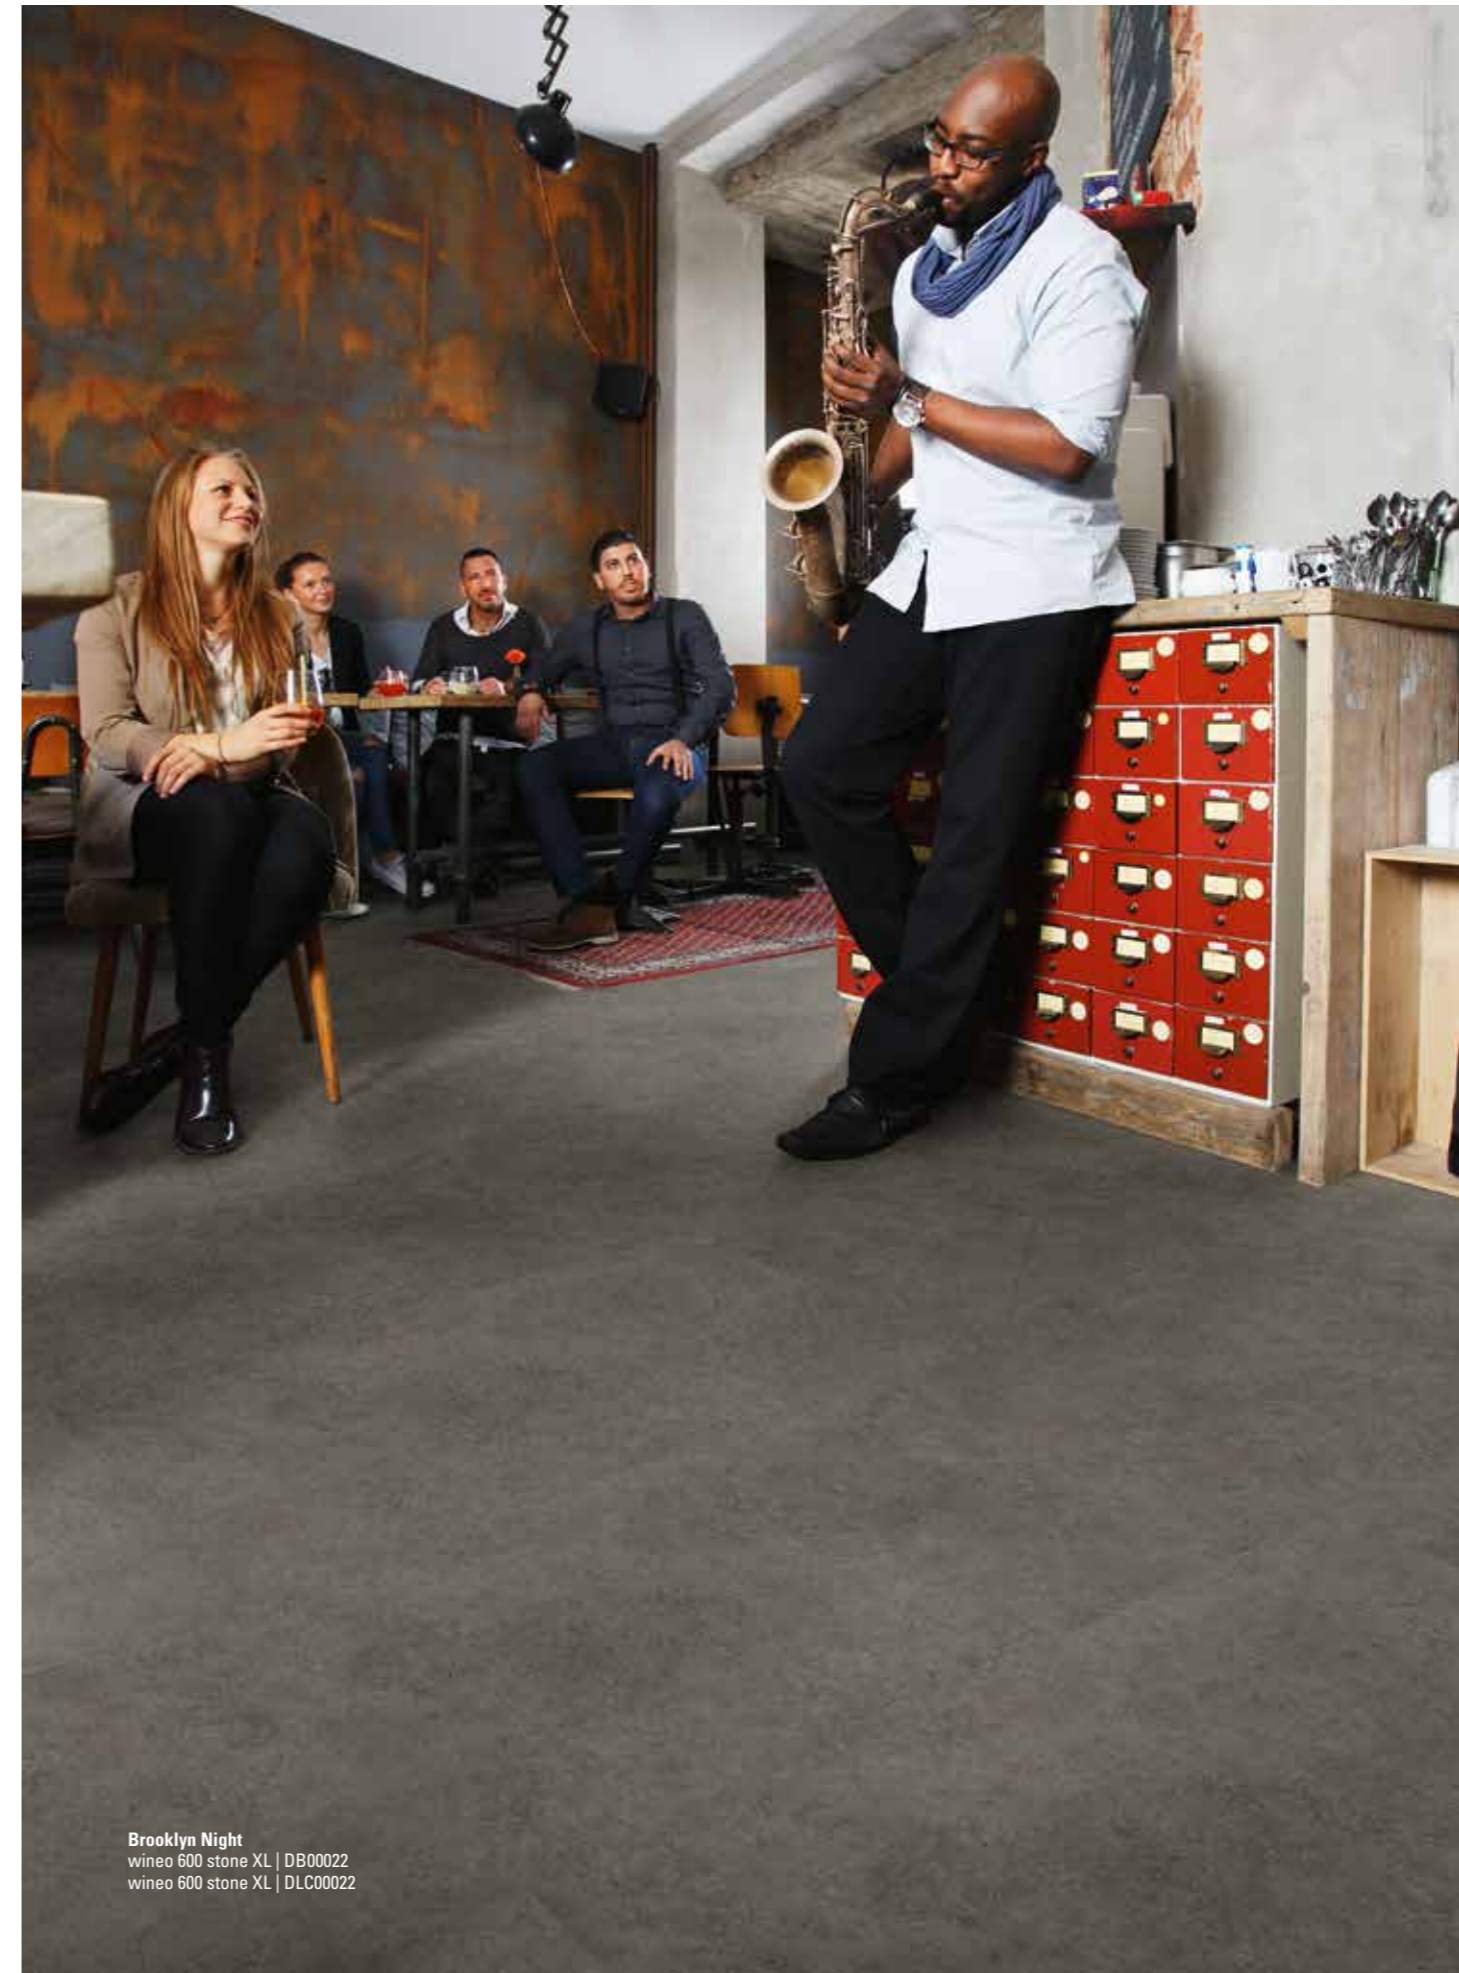

Brooklyn Night
wineo 600 stone XL | DB00022
wineo 600 stone XL | DLC00022


Anna, Stylist

»As a stylist, I am on my feet all day long. So I appreciate every single minute of being on an elastic design flooring, which is gentle on the joints.«


**wineo 800****CONFIDENT IN STYLE.
MAKING AN IMPACT.**

Developed with the help of trend scouts, wineo 800 provides plenty of impressive new inspiration. The collection offers 42 innovative designs for gluing or clicking in, in a total of 8 different formats. With a wear layer of 0.55 mm, wineo 800 is a premium design covering and is therefore ideal for commercial property and discerning private customers.

Infinity Light Mixed
wineo 800 craft | DB00072

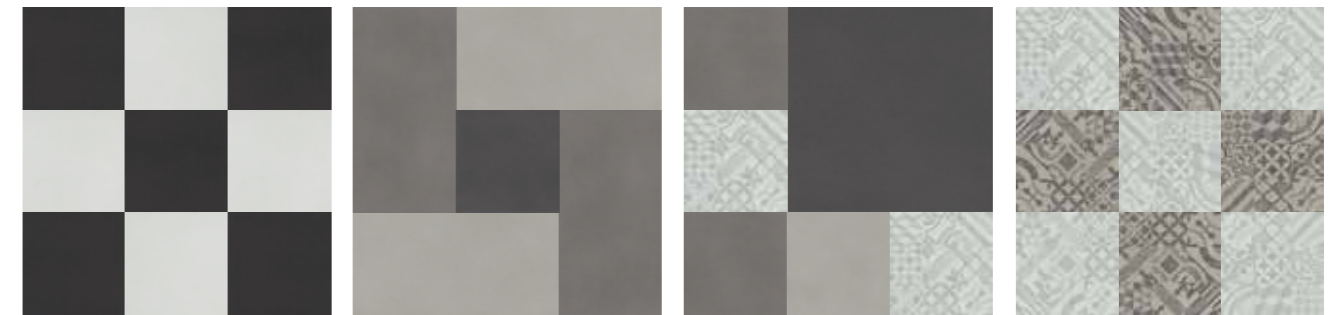

tile L tile L | tile XL tile L | tile XXL | craft craft

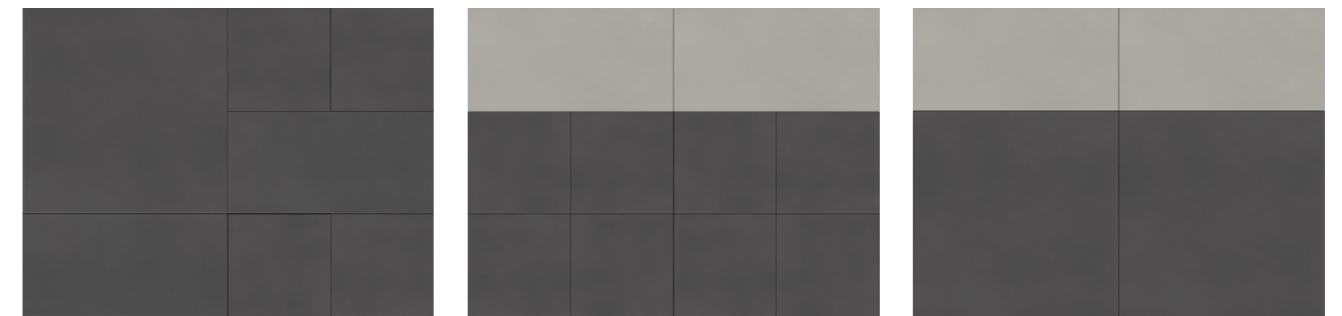

tile L | tile XL | tile XXL tile L | tile XL tile L | tile XXL



wood | tile wood | craft tile L | craft



tile XL tile XL wood | craft



craft craft wood | craft

COMBINATIONS

wineo 800, in particular, offers plenty of opportunities for creatively combining various decors and formats for gluing. This means that any floor can be transformed, making it truly distinctive and unique.

wineo 800 wood | wood XL

Installation type:	Glue
Product thickness:	2.5 mm 2.5 mm
Wear layer:	0.55 mm 0.55 mm
Planks / box:	16/3.46 m ² 12/4.24 m ²
Installation type:	Click
Product thickness:	5 mm 5 mm
Wear layer:	0.55 mm 0.55 mm
Planks / box:	8/1.79 m ² 6/2.14 m ²



1200 × 180 mm

XL
1505 × 235 mm

1212 × 185 mm

XL
1505 × 237 mm

wood XL with registered
embossed surface

Mona, Gallery Owner

»For my exhibitions, it is important that the flooring provides a stage for the works of art so that their full effect can be appreciated. In the background, high-quality and hard-wearing. That's precisely what flooring should be.«



Helsinki Rustic Oak
wineo 800 wood XL | DB00068
wineo 800 wood XL | DLC0068

SCANDINAVIAN LIGHT WOOD

NATURAL WARM WOOD



Copenhagen Frosted Pine
1 strip | Handscraped I
Skirting board 19/58: 30060550

Glue: DB00076
Click: DLC00076



Gothenburg Calm Oak
1 strip | Exclusive wood structure
Skirting board 19/58: 30060556

Glue: DB00077
Click: DLC00077



Salt Lake Oak
1 strip | Exclusive wood structure
Skirting board 19/58: 30060549

Glue: DB00079
Click: DLC00079



Wheat Golden Oak
1 strip | Exclusive wood structure
Skirting board 19/58: 30060552

Glue: DB00080
Click: DLC00080



Riga Vibrant Pine
1 strip | Exclusive wood structure
Skirting board 19/58: 30060554

Glue: DB00082
Click: DLC00082



Honey Warm Maple
1 strip | Exclusive wood structure
Skirting board 19/58: 30060553

Glue: DB00081
Click: DLC00081



Clay Calm Oak
1 strip | **Registered embossed surface**
Skirting board 19/58: 30060540

Glue: DB00062
Click: DLC00062



Helsinki Rustic Oak
1 strip | **Registered embossed surface**
Skirting board 19/58: 30060546

Glue: DB00068
Click: DLC00068



Lund Dusty Oak
1 strip | **Registered embossed surface**
Skirting board 19/58: 30060543

Glue: DB00065
Click: DLC00065




Corn Rustic Oak
1 strip | **Registered embossed surface**
Skirting board 19/58: 30060542

Glue: DB00064
Click: DLC00064



Mud Rustic Oak
1 strip | **Registered embossed surface**
Skirting board 19/58: 30060541

Glue: DB00063
Click: DLC00063

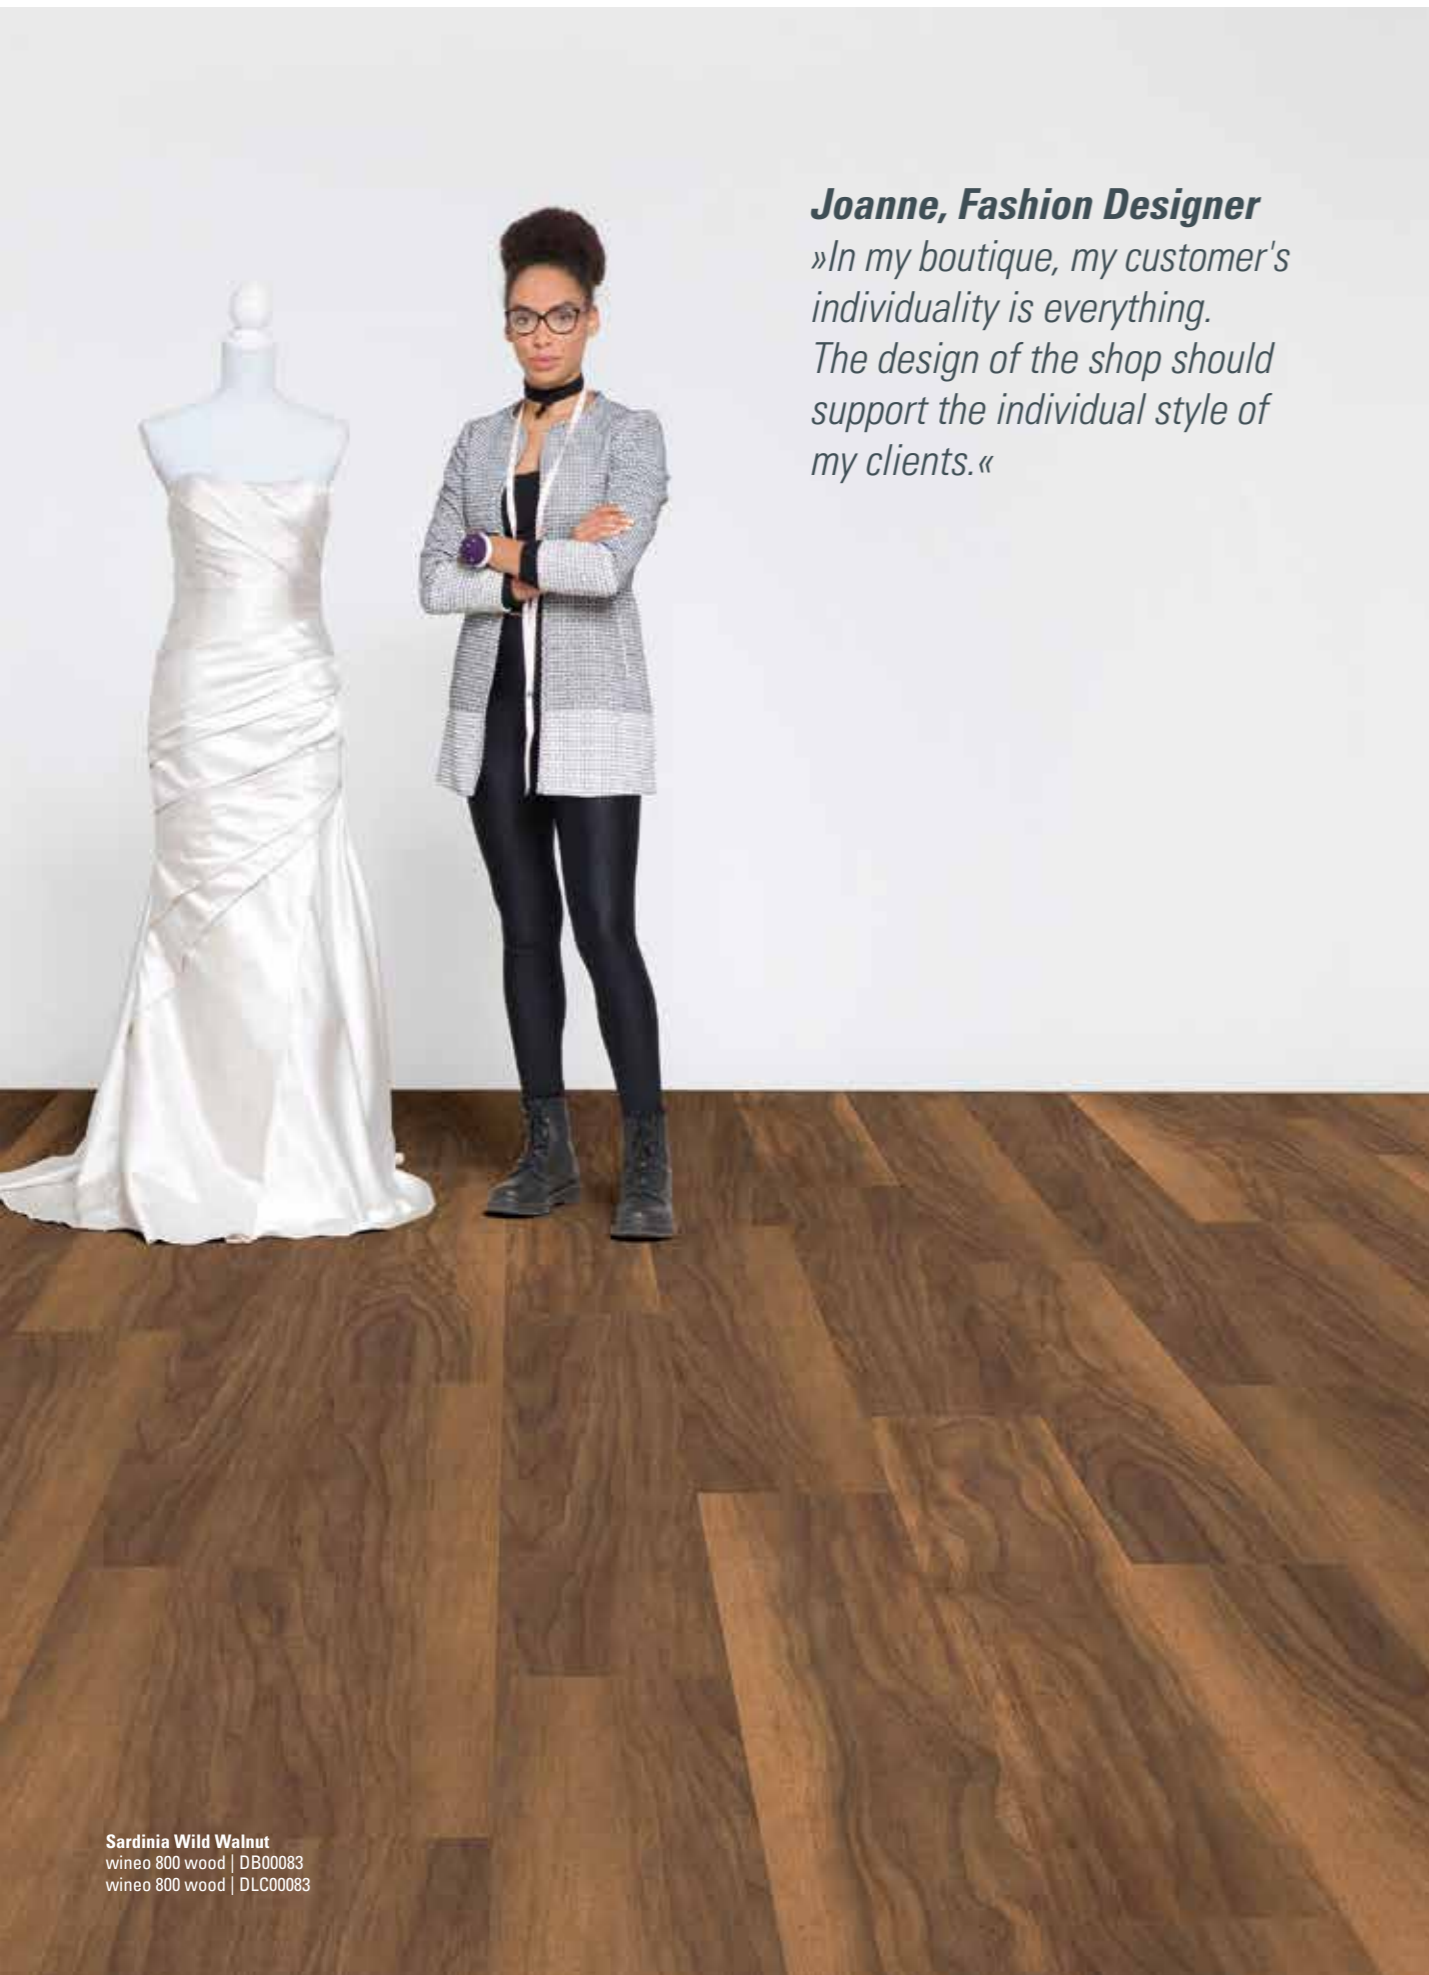

Joanne, Fashion Designer
»In my boutique, my customer's individuality is everything. The design of the shop should support the individual style of my clients.«

Sardinia Wild Walnut
 wineo 800 wood | DB00083
 wineo 800 wood | DLC00083

MEDITERRANEAN DARK WOOD



Balearic Wild Oak
 1 strip | Exclusive wood structure
 Skirting board 19/58: 30060557

Glue: DB00078
 Click: DLC00078



Crete Vibrant Oak
 1 strip | Exclusive wood structure
 Skirting board 19/58: 30060558

Glue: DB00075
 Click: DLC00075



Sardinia Wild Walnut
 1 strip | Exclusive wood structure
 Skirting board 19/58: 30060555

Glue: DB00083
 Click: DLC00083



Cyprus Dark Oak
 1 strip | **Registered embossed surface**
 Skirting board 19/58: 30060544

Glue: DB00066
 Click: DLC00066

XL



Santorini Deep Oak
 1 strip | **Registered embossed surface**
 Skirting board 19/58: 30060539

Glue: DB00061
 Click: DLC00061

XL



Ponza Smoky Oak
 1 strip | **Registered embossed surface**
 Skirting board 19/58: 30060545

Glue: DB00067
 Click: DLC00067


XL



Sicily Dark Oak
 1 strip | **Registered embossed surface**
 Skirting board 19/58: 30060547

Glue: DB00069
 Click: DLC00069

XL

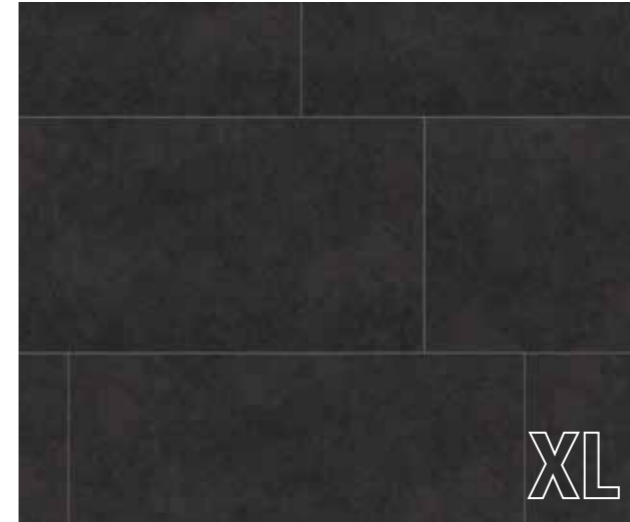

Dark Slate
1-strip | Slate structure
Skirting board 19/58: 30060435 (white)

Glue: DB00085
Click: DLC00085 (real joint)



Silver Slate
1-strip | Slate structure
Skirting board 19/58: 30060435 (white)

Glue: DB00087
Click: DLC00087 (real joint)



Raw Concrete
1 strip | Sand structure
Skirting board 19/58: 30060435 (white)

Glue: DB00088
Click: DLC00088



Rough Concrete
1 strip | Sand structure
Skirting board 19/58: 30060435 (white)

Glue: DB00089
Click: DLC00089



Copper Slate
1-strip | Stone structure
Skirting board 19/58: 30060435 (white)

Glue: DB00091
Click: DLC00091 (real joint)



Light Sand
1-strip | Stone structure
Skirting board 19/58: 30060435 (white)

Glue: DB00095
Click: DLC00095 (real joint)



Calm Concrete
1 strip | Sand structure
Skirting board 19/58: 30060435 (white)

Glue: DB00094
Click: DLC00094



Heavy Metal
1 strip | Glossy surface
Skirting board 19/58: 30060435 (white)

Glue: DB00084
Click: DLC00084 (real joint)



Art Concrete
1 strip | Sand structure
Skirting board 19/58: 30060435 (white)

Glue: DB00086
Click: DLC00086 (real joint)




White Marble
1 strip | Sand structure
Skirting board 19/58: 30060435 (white)


Glue: DB00090
Click: DLC00090

John, Architect


»Today's requirements are high. Flooring is a design element, which has to fulfill two major requirements: functionality and design – both to a very high quality.«

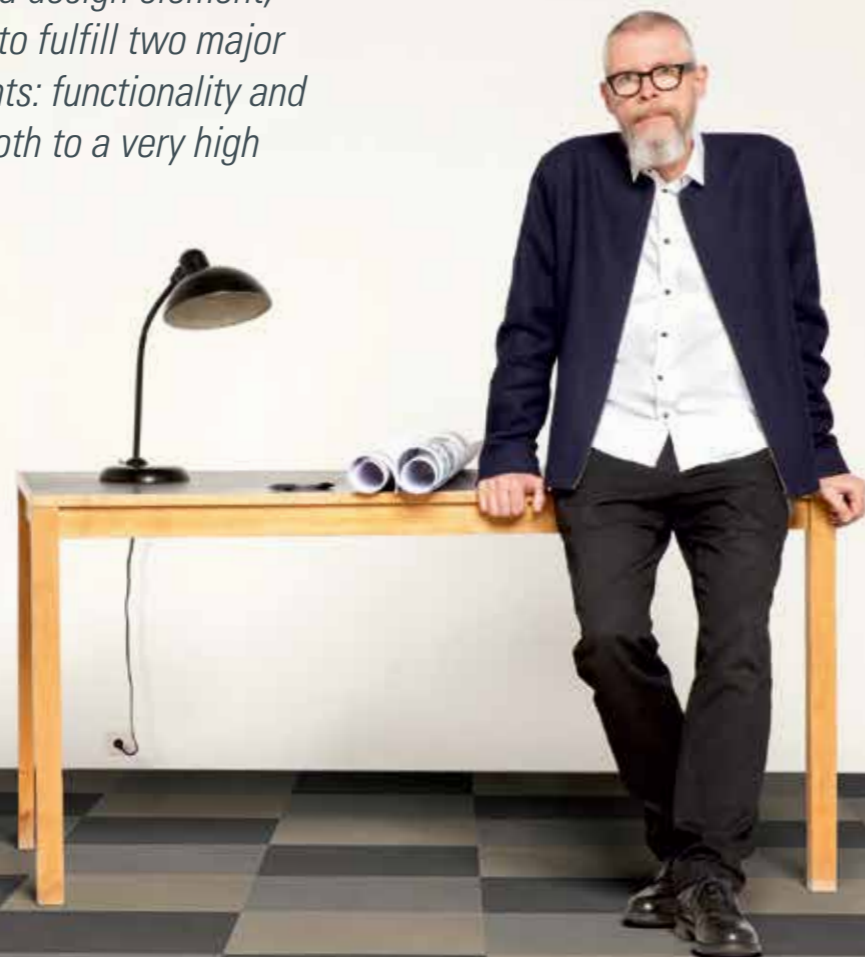


Solid Dark | Solid Grey | Solid Umbra
 wineo 800 tile | DB00096-1
 wineo 800 tile | DB00097-1
 wineo 800 tile | DB00098-1

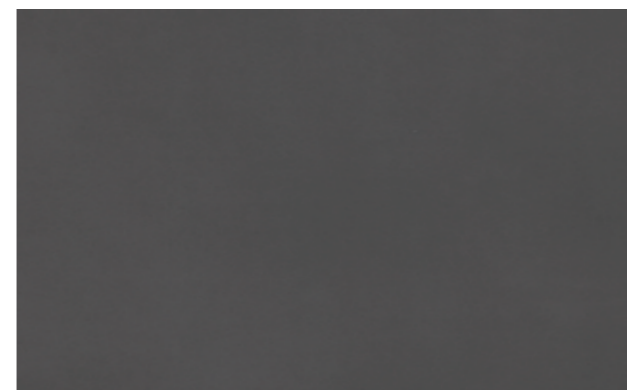**Solid Dark**


Sand structure
 Skirting board 19/58: 30060435 (white)

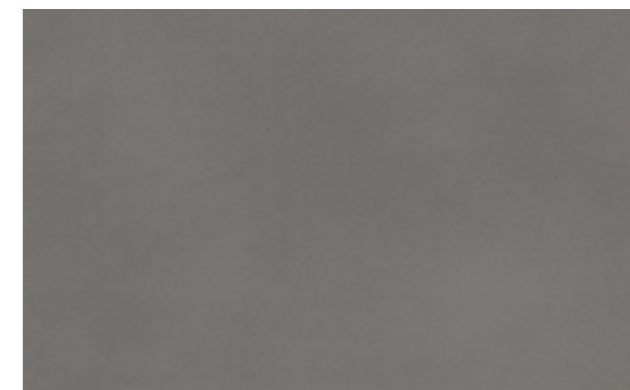Glue: DB00096-1 (XXL)**Glue:** DB00096-2 (XL)**Glue:** DB00096-3 (L)**Solid Grey**


Sand structure
 Skirting board 19/58: 30060435 (white)

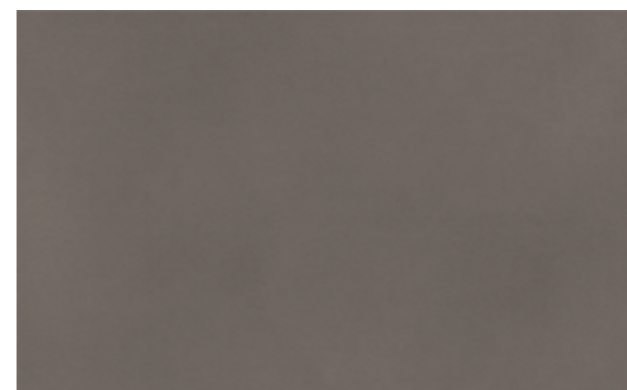Glue: DB00097-1 (XXL)**Glue:** DB00097-2 (XL)**Glue:** DB00097-3 (L)**Solid Taupe**

Sand structure
 Skirting board 19/58: 30060435 (white)

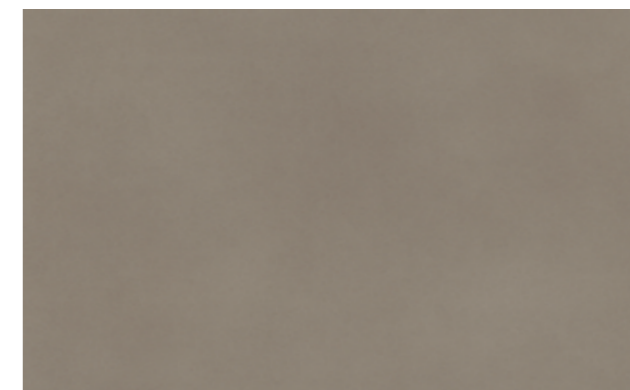Glue: DB00099-1 (XXL)**Glue:** DB00099-2 (XL)**Glue:** DB00099-3 (L)**Solid Umbra**

Sand structure
 Skirting board 19/58: 30060435 (white)

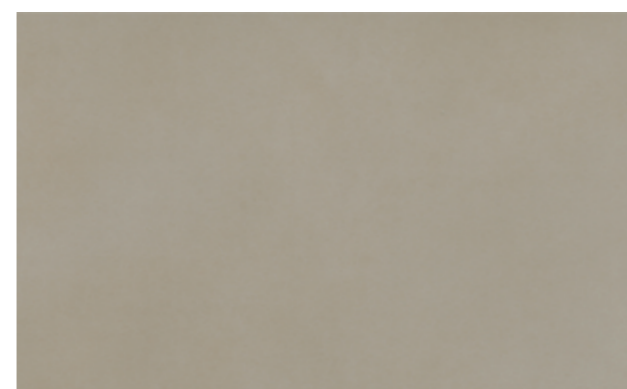Glue: DB00098-1 (XXL)**Glue:** DB00098-2 (XL)**Glue:** DB00098-3 (L)**Solid Sand**

Sand structure
 Skirting board 19/58: 30060435 (white)

Glue: DB00100-1 (XXL)**Glue:** DB00100-2 (XL)**Glue:** DB00100-3 (L)**Solid Light**

Sand structure
 Skirting board 19/58: 30060435 (white)

Glue: DB00101-1 (XXL)**Glue:** DB00101-2 (XL)**Glue:** DB00101-3 (L)**Solid White**

Sand structure
 Skirting board 19/58: 30060435 (white)

Glue: DB00102-1 (XXL)**Glue:** DB00102-2 (XL)**Glue:** DB00102-3 (L)**Solid Black**

Sand structure
 Skirting board 19/58: 30060435 (white)

Glue: DB00103-1 (XXL)**Glue:** DB00103-2 (XL)**Glue:** DB00103-3 (L)



Mosaic Dark
1 strip | Sand structure
Skirting board 19/58: 30060435 (white)

Glue: DB00093



Mosaic Light
1 strip | Sand structure
Skirting board 19/58: 30060435 (white)

Glue: DB00092



Infinity Dark Solid
1-strip | Exclusive wood structure
Skirting board 19/58: 30060548

Glue: DB00073



Infinity Light Solid
1-strip | Exclusive wood structure
Skirting board 19/58: 30060549

Glue: DB00074



Infinity Dark Mixed*
1-strip | Exclusive wood structure
Skirting board 19/58: 30060435 (white)


Glue: DB00071



Infinity Light Mixed*
1-strip | Exclusive wood structure
Skirting board 19/58: 30060435 (white)

Glue: DB00072

* Mixed = various plank colours in one box

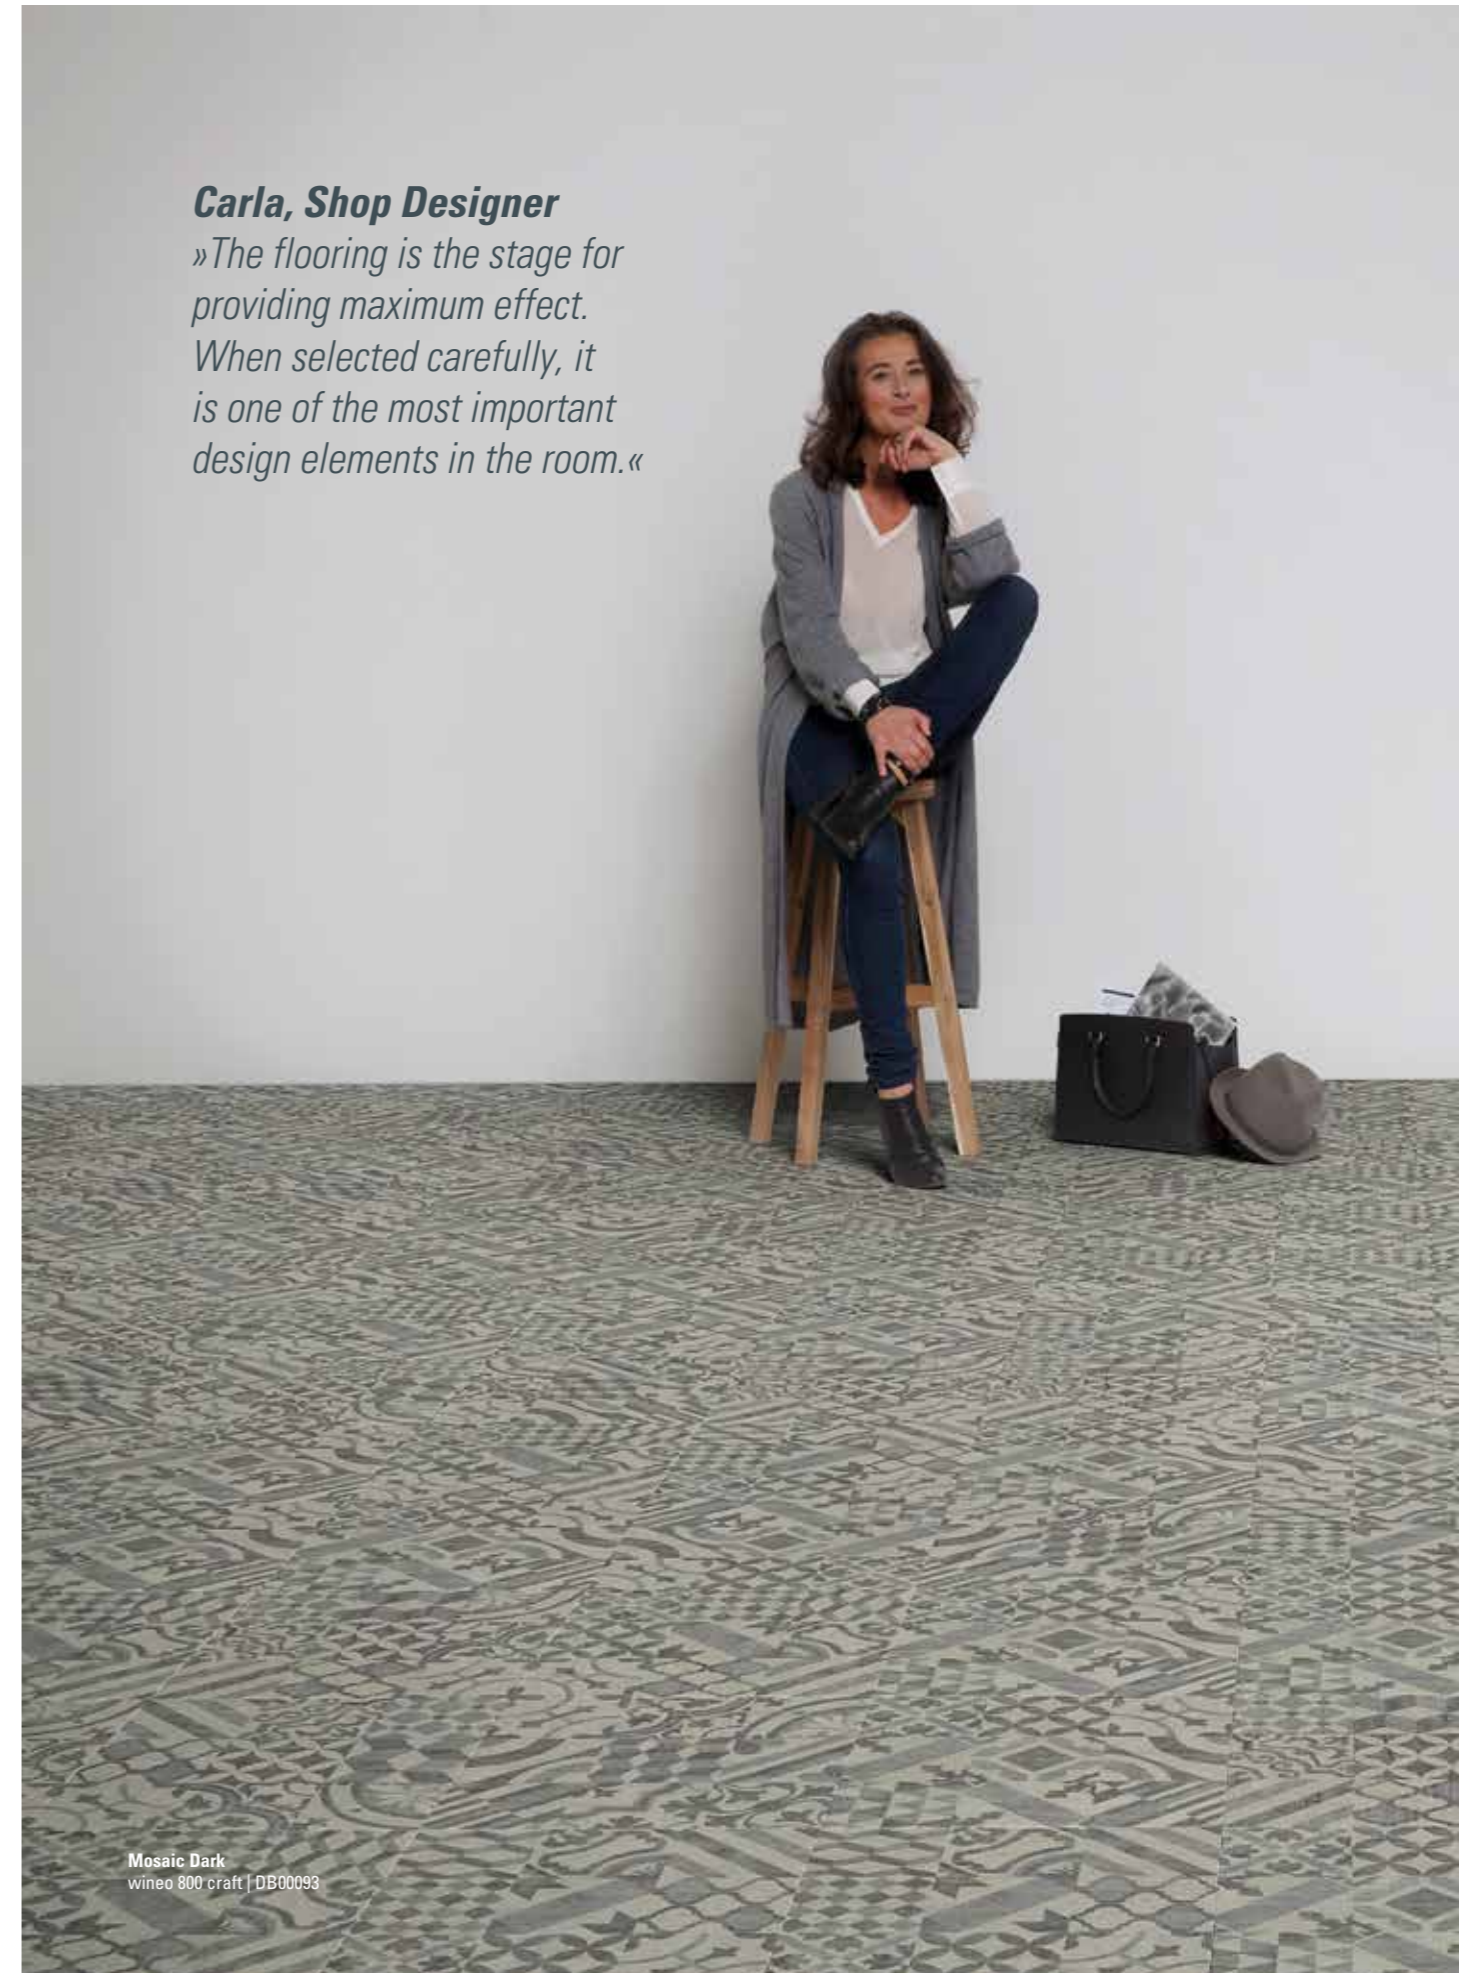

Carla, Shop Designer
»The flooring is the stage for providing maximum effect. When selected carefully, it is one of the most important design elements in the room.«

Mosaic Dark
wineo 800 craft | DB00093

ACCESSORIES

COLOUR-MATCHING AND PLAIN-COLOURED SKIRTING BOARDS

Our range of accessories includes suitable skirting boards which perfectly match the decors of the wineo Design Flooring. Plain skirting, which can be universally combined with all designs, is also available. You can find advice on suitable skirting boards on the preceding collection pages and in our accessories brochure.



Skirting board 19 / 58
MDF base
19 x 58 x 2400 mm
PU = 4 units



All white skirting boards can be painted!

CLIPHOLDER FASTENING SYSTEM

In order to install wineo skirting boards quickly and easily, we recommend using the Clipholder fastening system. This system enables cables to be invisibly routed and can be removed without any problems whenever you would like to paint or wallpaper the walls.



Clipholder | Art.-no. 30020241
PU = 30 clips / approx. 15 metres
Minimum order size = 1 PU

FEATURE STRIPS

wineo feature strips (width 5 mm) can be used on all design flooring for gluing to enhance the natural plank or tile look. The format of the individual elements is emphasised, creating a joint effect.



You can find more detailed information in our Accessories Brochure, which you can also view online:

www.wineo.de/en/service/downloads

UNDERLAY MATERIAL

We recommend using our silentPREMIUM or silentCOMFORT insulation mats with wineo Design Flooring – the ideal underlay material made **from up to 90% natural raw materials** for even more comfort and optimum acoustics.

- outstanding and long-lasting impact sound qualities
- punctual conformability
- increased ease of installation
- perfect for underfloor heating
- **silentPREMIUM: no additional adhesive material necessary due to the self-adhesive surface**

wineo silentPREMIUM insulation mat for wineo Design Flooring for gluing



wineo silentCOMFORT insulation mat for wineo Design Flooring for clicking in



ALUMINIUM PROFILES

wineo profiles are ideal for creating a neat finish between floors and walls, adjacent thresholds or other components. They form a smooth transition, close expansion gaps and are available in classic metal looks as well as in various wood designs. You can see an overview of all the available transition, adjustment and end profiles in the Accessories Brochure.

TRANSITION PROFILES



ADJUSTMENT PROFILES



END PROFILES



SERVICE

We work with distributors, architects, property developers and anyone who appreciates great floor coverings. That's why we offer a wide range of services. If you would like to be kept regularly up to date, just take a look at YouTube, Facebook, Twitter or Pinterest.



TECHNICAL SUPPORT

Do you have any questions about our products, where they can be used or regarding installation? Do not hesitate to contact your distributor. They will be happy to help you!



MARKETING SUPPORT

We have a **wide range of samples and printed materials** to help with product presentation and sales promotion at the POS. You can get an overview of all our presentation tools, from brochures to displays, in our **"ADVERTISING WITH WINEO"** sales promotion brochure. Of course we can also coordinate with you to fulfil your **individual requirements**. Don't hesitate to get in touch!




NEWSLETTER

Stay in touch with us: it's easy to sign up for the wineo newsletter on our website. This will guarantee that you don't miss out on anything and will always be kept up to date.

COMPANY BLOG

Get some inspiration and find out even more about our products, references and events. Discover it now at:

blog.wineo.de/en

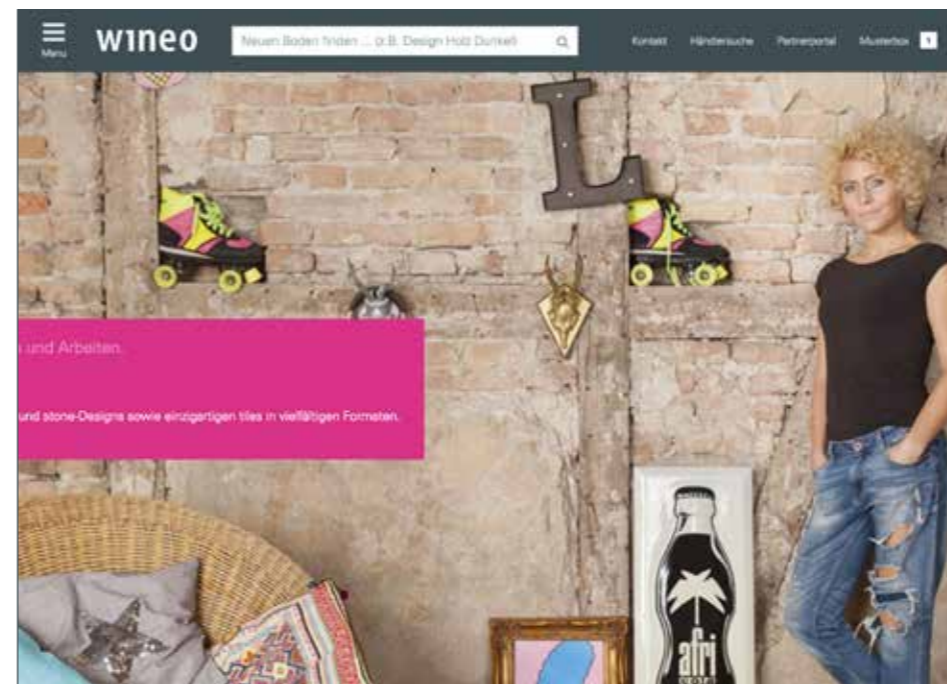

EN.WINEO.DE

- information and references as well as relevant downloads on the products
- product search by characteristic, colour, format, installation height and utilisation class
- find a retailer
- video portal with plenty of tips and tricks, such as installation instructions

QUALITY

wineo – That's flooring. We meet requirements head on and come up with great ideas. That's what makes us the ideal choice when it comes to creating a comfortable lifestyle, dealing with demanding projects and creating successful businesses. Our business focuses on quality, service and the power of innovation.


Tested quality

Since wineo flooring has to fulfill the highest requirements, it must undergo a strict quality control process. From worldwide suppliers of raw materials right through to the finished and packaged product, our floorings are subjected to a 7-stage quality control process subject to the highest standards. This means that we can guarantee that our quality products, which have been recognised by several awards, continue to set standards in the future.

High level of responsibility


As a family business in the third generation, we have a high level of social and ecological responsibility. Consistent availability of goods, intense user and marketing support, expert advice and permanent product improvement as well as development are what make wineo stand out and ensure the trust and security of our market partners worldwide.

wineo



CE marking

The CE marking confirms that our product has been tested and that it meets all EU requirements in terms of safety, healthcare and environmental protection.



A+

Just like the "Blue Angel" in Germany, the A+ seal identifies our products as ecological, healthy and user friendly in the French market.



PEFC (valid for Multi-Layer)

The PEFC quality seal is based on very strict guidelines for managing our forests in a sustainable manner and guarantees that timber is used from verified cultivation sources. The entire product manufacturing process - from the raw materials through to the ready-to-use end product - is certified and verified by independent assessors.



TFI-TÜV PROFICERT PREMIUM

The TFI (Textiles & Flooring Institute GmbH) and TÜV Hessen evaluate products from a quality, health and ecological point of view. Essentially, products can only be certified if they present no health risk.



COLLECTION OVERVIEW

Collection	wineo 400 wood			wineo 400 wood XL			wineo 400 stone			wineo 600 wood		wineo 600 wood XL		wineo 600 stone		wineo 600 stone XL		wineo 800 wood		wineo 800 wood XL		wineo 800 stone XL		wineo 800 tile			wineo 800 craft			
	Multi-Layer			Multi-Layer			Multi-Layer															L	XL	XXL						
Installation type	Glue	Click	Click	Glue	Click	Click	Glue	Click	Click	Glue	Click	Glue	Click	Glue	Click	Glue	Click	Glue	Click	Glue	Click	Glue	Click	Glue	Click	Glue	Click	Glue	Click	
Core board	-	-	Aqua-Protect®	-	-	Aqua-Protect®	-	-	Aqua-Protect®	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	
Format	1200 × 180 mm	1212 × 187 mm	1222 × 182 mm	1505 × 235 mm	1507 × 235 mm	1520 × 230 mm	609.6 × 304.8 mm	600 × 316 mm	601 × 310 mm	1200 × 180 mm	1212 × 187 mm 1212 × 185 mm (DLC00011)	1505 × 235 mm	1505 × 237 mm	609.6 × 304.8 mm	600 × 317 mm	900 × 450 mm	914 × 480 mm	1200 × 180 mm	1212 × 185 mm	1505 × 235 mm	1505 × 237 mm	914.4 × 457.2 mm	914 × 480 mm	457.2 × 457.2 mm	914.4 × 457.2 mm	914.4 × 914.4 mm	457.2 × 457.2 mm	914.4 × 914.4 mm	457.2 × 457.2 mm	914.4 × 101.6 mm
Product thickness	2 mm	4.5 mm	9 mm	2 mm	4.5 mm	9 mm	2 mm	4.5 mm	9 mm	2 mm	5 mm	2 mm	5 mm	2 mm	5 mm	2 mm	5 mm	2.5 mm	5 mm	2.5 mm	5 mm	2.5 mm	5 mm	2.5 mm	5 mm	2.5 mm	5 mm	2.5 mm	5 mm	2.5 mm
Wear layer	0.3 mm	0.3 mm	0.3 mm	0.3 mm	0.3 mm	0.3 mm	0.3 mm	0.3 mm	0.3 mm	0.4 mm	0.4 mm	0.4 mm	0.4 mm	0.4 mm	0.4 mm	0.4 mm	0.4 mm	0.55 mm	0.55 mm	0.55 mm	0.55 mm	0.55 mm	0.55 mm	0.55 mm	0.55 mm	0.55 mm	0.55 mm	0.55 mm	0.55 mm	
Planks or tiles / box	18/3.89 m²	10/2.27 m²	9/2.00 m²	12/4.24 m²	6/2.12 m²	6/2.10 m²	18/3.34 m²	12/2.28 m²	9/1.68 m²	18/3.89 m²	8/1.81 m² 8/1.79 m² (DLC00011)	12/4.24 m²	6/2.14 m²	18/3.34 m²	10/1.90 m²	12/4.86 m²	6/2.63 m²	16/3.46 m²	8/1.79 m²	12/4.24 m²	6/2.14 m²	10/4.18 m²	6/2.63 m²	16/3.34 m²	10/4.18 m²	6/5.02 m²	16/3.34 m²	20/1.86 m²		
Boxes / pallet	60/233.40 m²	48/108.96 m²	44/88.00 m²	64/271.36 m²	52/110.24 m²	52/109.20 m²	60/200.40 m²	48/109.44 m²	60/100.80 m²	60/233.40 m²	64/115.84 m² 64/114.56 m² (DLC00011)	64/271.36 m²	56/119.84 m²	72/240.48 m²	60/114.00 m²	50/243.00 m²	44/115.72 m²	75/259.50 m²	64/114.56 m²	60/254.40 m²	56/119.84 m²	40/167.20 m²	44/115.72 m²	52/173.68 m²	40/167.20 m²	37/185.74 m²	52/173.68 m²	135/251.10 m²		
Surface treatment	PU	PU	PU	PU	PU	PU	PU	PU	PU	PU	PU	PU/UV	PU/UV	PU	PU	PU	PU	PU	PU	PU	PU	PU	PU	PU	PU	PU	PU	PU	PU	
Bevelled edge	■	■	-	■	■	-	-	-	-	-	-	-	-	-	-	-	-	■	■	■	■	-	■	■	■	■	■	■	■	
Real joint	-	-	-	-	-	-	-	■	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-		
Utilisation classes EN ISO 10874	23/31	23/31	23/31	23/31	23/31	23/31	23/31	23/31	23/31	23/31	23/32/41	23/32/41	23/32/41	23/32/41	23/32/41	23/32/41	23/32/41	23/33/42	23/33/42	23/33/42	23/33/42	23/33/42	23/33/42	23/33/42	23/33/42	23/33/42	23/33/42	23/33/42	23/33/42	
Binder content EN ISO 10582	Type I																													
Reaction to fire EN 13501-1	B _n - s1	B _n - s1	B _n - s1	B _n - s1	B _n - s1	B _n - s1	B _n - s1	B _n - s1	B _n - s1	B _n - s1	B _n - s1	B _n - s1	B _n - s1	B _n - s1	B _n - s1	B _n - s1	B _n - s1	B _n - s1	B _n - s1	B _n - s1	B _n - s1	B _n - s1	B _n - s1	B _n - s1	B _n - s1	B _n - s1	B _n - s1	B _n - s1		
Anti slip category DIN 51130	R 9																													
Slip resistance EN 13893	μ ≥ 0.30 - DS																													
Anti-static properties EN 1815	≤ 2 kV																													
Staining / Chemical resistance EN ISO 26987	High resistance level depending on concentration and exposure time.																													
Light fastness EN ISO 105-B02 (procedure 2)	≥ 6																													
Residual indentation EN ISO 24343-1 in combination with silentPREMIUM	≤ 0.1 mm ~ 0.17 mm	≤ 0.1 mm -	≤ 0.1 mm -	≤ 0.1 mm ~ 0.17 mm	≤ 0.1 mm -	≤ 0.1 mm -	≤ 0.1 mm ~ 0.17 mm	≤ 0.1 mm -	≤ 0.1 mm -	≤ 0.1 mm ~ 0.17 mm	≤ 0.1 mm -	≤ 0.1 mm ~ 0.17 mm	≤ 0.1 mm -	≤ 0.1 mm ~ 0.17 mm	≤ 0.1 mm -	≤ 0.1 mm ~ 0.17 mm	≤ 0.1 mm -	≤ 0.1 mm ~ 0.17 mm	≤ 0.1 mm -	≤ 0.1 mm ~ 0.17 mm	≤ 0.1 mm -	≤ 0.1 mm ~ 0.17 mm	≤ 0.1 mm -	≤ 0.1 mm ~ 0.17 mm	≤ 0.1 mm ~ 0.17 mm	≤ 0.1 mm ~ 0.17 mm	≤ 0.1 mm ~ 0.17 mm	≤ 0.1 mm ~ 0.17 mm		
Castor chair test ISO 4918	25000 revolutions, no damage with rolls type W																													
Suitability for underfloor heating	Suitable for all conventional hot water underfloor heating and electrical systems regulated up to a surface temperature of 27° C.																													
Thermal resistance (m²K)/W EN 12667 in combination with silentCOMFORT in combination with silentPREMIUM	~ 0.011 - ***	~ 0.012 ~ 0.022 -	≤ 0.058 - -	~ 0.011 - ***	~ 0.012 ~ 0.022 -	≤ 0.058 - -	~ 0.011 - ***	~ 0.012 ~ 0.022 -	≤ 0.058 - -	≤ 0.011 - ***	≤ 0.021 ≤ 0.031 -	≤ 0.011 - -	≤ 0.021 ≤ 0.031 -	≤ 0.011 - -	≤ 0.021 ≤ 0.031 -	≤ 0.011 - -	≤ 0.021 ≤ 0.031 -	≤ 0.015 - -	≤ 0.021 ≤ 0.031 -	≤ 0.015 - -	≤ 0.021 ≤ 0.031 -	≤ 0.015 - -	≤ 0.021 ≤ 0.031 -	≤ 0.015 - -	≤ 0.021 ≤ 0.031 -	≤ 0.015 - -	≤ 0.021 ≤ 0.031 -	≤ 0.015 - -		
Impact sound reduction EN ISO 16251-1 in combination with silentCOMFORT	~ 4 dB -	~ 7 dB ≤ 14 dB	*** -	~ 4 dB -	~ 7 dB ≤ 14 dB	*** -	~ 4 dB -	~ 7 dB ≤ 14 dB	*** -	~ 4 dB -	~ 7 dB ≤ 14 dB	*** -	~ 4 dB -	~ 7 dB ≤ 14 dB	*** -	~ 4 dB -	~ 7 dB ≤ 14 dB	~ 4 dB -	~ 7 dB ≤ 14 dB	~ 4 dB -	~ 7 dB ≤ 14 dB	~ 4 dB -	~ 7 dB ≤ 14 dB	~ 4 dB -	~ 7 dB ≤ 14 dB	~ 4 dB -	~ 7 dB ≤ 14 dB	~ 4 dB -		
Dimensional stability EN ISO 23999	***	***	***	***	***	***	***	***	***	~ 0.15 %	~ 0.1 %	~ 0.15 %	~ 0.1 %	~ 0.15 %	~ 0.1 %	~ 0.15 %	~ 0.1 %	~ 0.15 %	~ 0.1 %	~ 0.15 %	~ 0.1 %	~ 0.15 %	~ 0.1 %	~ 0.15 %	~ 0.1 %	~ 0.15 %	~ 0.1 %	~ 0.15 %		
Guarantee for private use according to Windmüller warranty conditions	15 years	15 years	15 years	15 years	15 years	15 years	15 years	15 years	15 years	20 years	20 years	20 years	20 years	20 years	20 years	20 years	20 years	25 years	25 years	25 years	25 years	25 years	25 years	25 years	25 years	25 years	25 years	25 years	25 years	
Designs	18			12			10			14		10		4		4		9		9		10		8			2		4	
Page	22 – 25			26 – 27			28 – 29			34 – 35		36 – 37		38 – 39		40 – 41		48 – 51		48 – 51		54 – 55		56 – 57			58 – 59			

SYMBOLS

INSTALLATION TYPES



Glue (Dryback)



Click (Connect locking system)



Click (LocTec® locking system)

PRODUCT FEATURES



Resistance to staining



Suitability for chair castors



Suitability for underfloor heating



Suitability for damp areas



Bevelled edge



Real joint



PU surface coating



UV surface coating



Insulation mat Sound-Protect Eco

UTILISATION CLASSES



Utilisation class 23:
Heavy-duty use
in the domestic area




Utilisation class 31:
Medium use
in the commercial sector




Utilisation class 32:
Normal use
in the commercial sector



Utilisation class 33:
Heavy-duty use
in the commercial sector



Utilisation class 41:
Medium use
in the light industrial sector
(vehicular traffic excluded)



Utilisation class 42:
Normal use
in the light industrial sector

GUARANTEE



15 year guarantee (for private application)



20 year guarantee (for private application)



25 year guarantee (for private application)

Windmüller GmbH

Nord-West-Ring 21

D-32832 Augustdorf

Tel.: +49 (0) 52 37 609 - 0

Fax: +49 (0) 52 37 609 - 309

info@wineo.de

www.wineo.de

Handed over by:

Product no. 20090846 | 04/2018

wineo