


Mono **Poly**

## LP156\*156-P-72

### Rated Power 320-340W

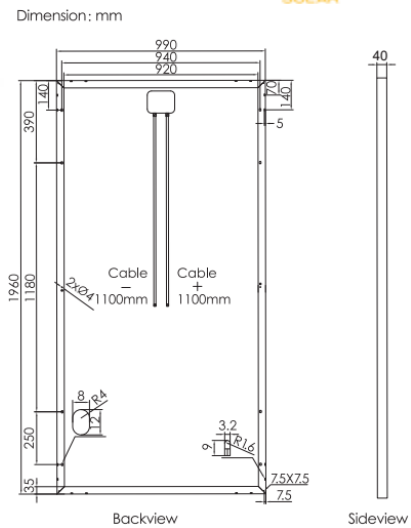


Product Series	LP156*156-P-72				
Power	320W	325W	330W	335W	340W
Open Circuit Voltage	45.80V	46.00V	46.20V	46.40V	46.60V
Short Circuit Current	9.07A	9.16A	9.25A	9.34A	9.43A
Maximum Power Voltage	37.40V	37.60V	37.80V	38.00V	38.20V
Maximum Power Current	8.56A	8.64A	8.73A	8.82A	8.90A
Module Efficiency	16.5%	16.7%	17.0%	17.3%	17.5%



**•10-YEAR 90% Maximum Output**  
**•25-YEAR 80% Maximum Output**

Product Characteristics			
Weight	21.5kg	Junction Box	IP67
Module Size	1960*990*40mm	Frame	Aluminum Alloy
Cell Amount	72 pcs	Cable	4mm <sup>2</sup> ,Length1100mm
Cell Size	156.75*156.75mm	Connection	(Compatible with)MC4
Maximum System Voltage	1000/1500V	Application Level	Class A



- Salt Spray Certificate
- IEC61701 (Salt Mist Corrosion Test)

Packing Configuration			
Modules/Pallet	26 pieces	Modules/40' container	624 pieces
Packing Description	24 Pallets, Total=26 X 24=624		


- TUV PID Certificate

- TUV Certificate

Temperature Characteristics		Maximum Rating	
NOCT	45±2°C	Output Tolerance	0~+3%W
Temp Coefficient of ISC	+0.06%/°C	Operating Temperature	-40°C ~+85°C
Temp Coefficient of VOC	-0.30%/°C	Wind Load/Snow Load	2400pa/5400pa
Temp Coefficient of Pmax	-0.40%/°C	Fuse Current	15A

**320W**  
**340W**  
 •Output 320W-340W

Current - Voltage Curve at Various Light Levels

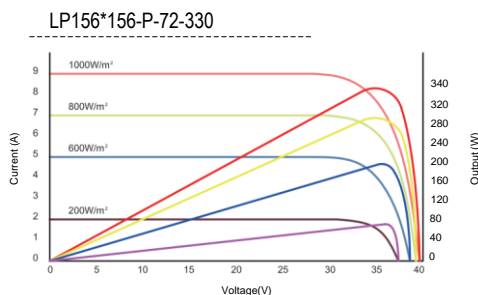

Output at Various Temperatures

