


15014 ED-S/MEDA

Field of application:

Larger electric tools, compressors, pumps, safety, gas welding Units, larger construction-site machines, el. welding. Extremely long lifetime. One CEE-31A-1ph.-socket, one CEE-16A-3ph.-socket, one Schuko-socket.

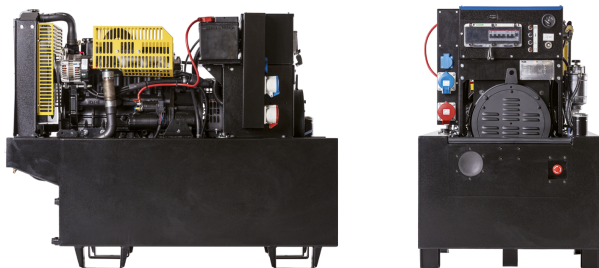

15014 ED-S/MEDA	987244
Alternator type	Synchronous
El. capacity: (3~) cos (phi) 0,8	15000 VA
El. capacity: (1~) cos (phi) 0,8	6000 VA
Voltage (3~)	400 V
Voltage (1~)	230 V
Voltage 3~	21,8 A
Max. sum. current (1~)	26 A
Current 1~ (CEE)	26 A
Current 1~ (Schuko)	16 A
max. starting current cos μ 0,6 (3~)	30 A
(with 20% voltage drop) (1~)	32 A
Frequency	50 Hz
Protection class alternator	IP 23
Engine Type	Mitsubishi S4L2
Number of cylinders	4
Torque-speed	1500 U min-1
Fuel Type	Diesel
Engine oli quantity	5,6 l
Engine power	13,6 kW
Weight	520 kg
Cooling engine/alternator	Water/Air
Length	1380 mm
Width	735 mm
Fuel capacity	210 l
Height	1095 mm
Noise power level	93 dB(A)
Operating time : full load	50 h
Noise pressure	65 dB(A)
Operating time : half load	85 h

