

EGO10


Door- or wall-mount air conditioners

COOLING CAPACITY

1000 W




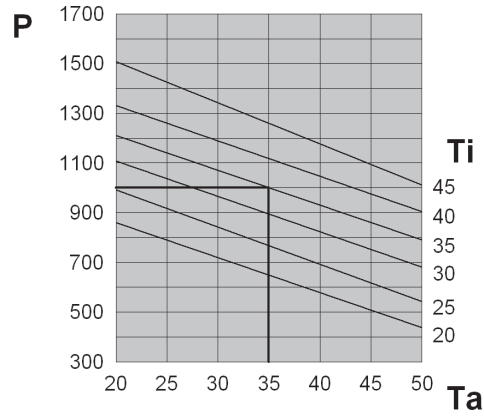

Performance



- P = Cooling capacity (W)
- Ta = Ambient Temperature (°C)
- Ti = Internal cabinet temperature (°C)

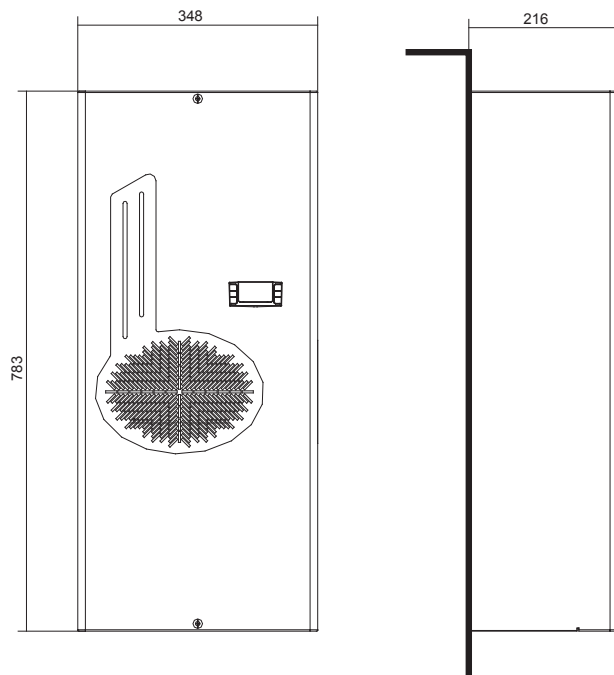Dimensions



Features	UoM	EGO10BT1B	EGO10BTVBX0000	EGO10CT1B	EGO10GT1B	EGO10KTVBX0000
Cooling capacity EN14511 - A35A35	W	1000	1000	1000	1000	1000
Cooling capacity EN14511 - A35A50	W	790	790	790	790	790
Power supply	V ~ Hz	230 1~ 50-60	230 1~ 50-60	115 1~ 50-60	400/440 2~ 50-60	400/460 2~ 50-60
Width	mm	348	348	348	348	348
Height	mm	783	783	783	783	783
Depth	mm	216	216	216+42**	216+58**	216+58**
Max current	A	3	3.1	6.7	2	2
Inrush current	A	10.5	10.5	23	8	8
T Fuse	A	6	6	10	4	4
Power draw EN14511 - A35A35	W	470	590	490	490	620
Power draw EN14511 -A35A50	W	560	670	580	580	710
Operating cycle	-	100%	100%	100%	100%	100%
Electrical connection	-	4-pin plug	4-pin plug	4-pin plug	4-pin plug	4-pin plug
R134a Refrigerant	kg	0.2	0.24	0.2	0.2	0.24
Max refrigeration circuit pressure	bar	25	28	25	25	28
External air fan capacity	m ³ /h	570	570	570	570	570
Cabinet air fan capacity	m ³ /h	330	330	330	330	330
Internal temperature range	°C	20-50	20-50	20-50	20-50	20-50
Temperature regulation	-	Electronic thermostat factory set to 35°C				
External temperature range	°C	20-55*	20-50	20-50	20-50	20-50
EN60529 ingress protection - cabinet side	-	IP55	IP55	IP55	IP55	IP55
EN60529 ingress protection - ambient side	-	IP34	IP34	IP34	IP34	IP34
Noise level	dB (A)	65	65	65	65	65
Weight	kg	28	28	29	29	29
Colour	-	RAL 7035 embossed effect				
Conformity	-	CE	CE 	CE	CE	CE 

* 50 °C at 60 Hz

** for external autotransformer dimensions

Accessories	
Pack of 5 fabric air filters	AAEFP10
Pack of 1 metal air filter	AAEFM10
Version "0", semi-recessed installation	
External stainless-steel framework	
Coating in non-standard colour	