

# EG008


Door- or wall-mount air conditioners

COOLING CAPACITY


820 W




## Performance

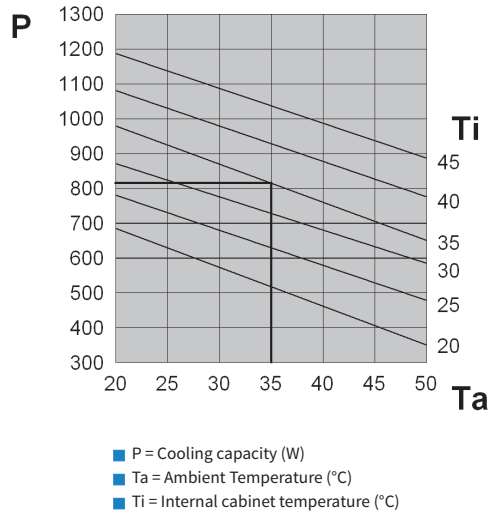

## Dimensions

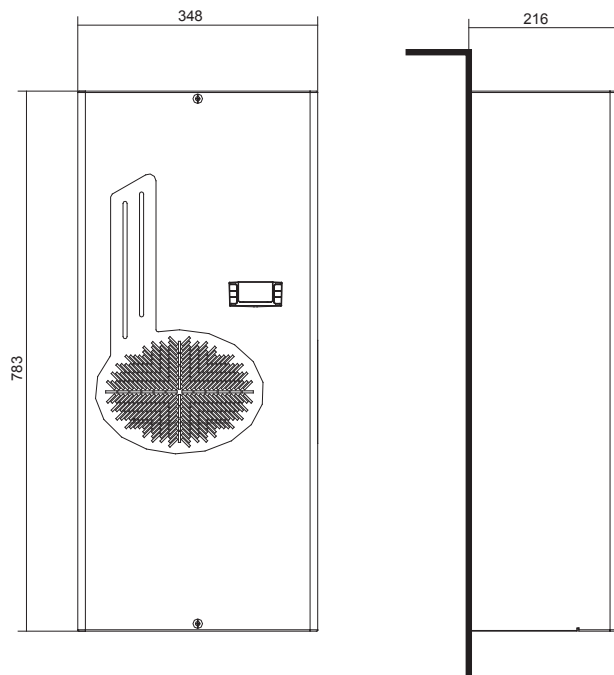

Features	UoM	EGO08BT1B	EGO08BTVBX0000	EGO08CT1B	EGO08GT1B
Cooling capacity EN14511 - A35A35	W	820	820	820	820
Cooling capacity EN14511 - A35A50	W	680	680	680	680
Power supply	V ~ Hz	230 1~ 50-60	230 1~ 50-60	115 1~ 50-60	400/440 2~ 50-60
Width	mm	348	348	348	348
Height	mm	783	783	783	783
Depth	mm	216	216	216+42**	216+58**
Max current	A	2.6	3.1	5.3	1.7
Inrush current	A	10.8	10.8	21.5	6.1
T Fuse	A	6	6	10	6
Power draw EN14511 - A35A35	W	410	440	420	420
Power draw EN14511 -A35A50	W	490	490	500	500
Operating cycle	-	100%	100%	100%	100%
Electrical connection	-	4-pin plug	4-pin plug	4-pin plug	4-pin plug
R134a Refrigerant	kg	0.21	0.21	0.21	0.21
Max refrigeration circuit pressure	bar	25	28	25	25
External air fan capacity	m <sup>3</sup> /h	570	570	570	570
Cabinet air fan capacity	m <sup>3</sup> /h	330	330	330	330
Internal temperature range	°C	20-50	20-50	20-50	20-50
Temperature regulation	-	Electronic thermostat factory set to 35°C			
External temperature range	°C	20-55*	20-55*	20-50	20-50
EN60529 ingress protection - cabinet side	-	IP55	IP55	IP55	IP55
EN60529 ingress protection - ambient side	-	IP34	IP34	IP34	IP34
Noise level	dB (A)	65	65	65	65
Weight	kg	27	27	28	28
Colour	-	RAL 7035 embossed effect			
Conformity	-	CE	CE 	CE	CE

\* 50 °C at 60 Hz

\*\* for external autotransformer dimensions

Accessories	
Pack of 5 fabric air filters	AAEFP10
Pack of 1 metal air filter	AAEFM10
Version "0", semi-recessed installation	
External stainless-steel framework	
Coating in non-standard colour	