

EMO04

Wall-mount air conditioners for outdoor applications

COOLING CAPACITY

380 W




| Accessories | |
|------------------------------------|---------|
| Pack of 5 fabric air filters | AAEFP04 |
| Pack of 1 metal air filter | AAEFM04 |
| External stainless-steel framework | |
| Coating in non-standard colour | |
| 48VDC evaporator fan | |
| Anti-tamper screw kit | |
| High temperature alarm | |
| Pressure alarms (low, high) | |

| Features | UoM | EMO04BM1B | EMO04CM1B |
|---|-------------------|---|--------------|
| Cooling capacity EN14511 - A35A35 | W | 380 | 380 |
| Cooling capacity EN14511 - A35A50 | W | 240 | 240 |
| Power supply | V ~ Hz | 230 1~ 50-60 | 115 1~ 50-60 |
| Width | mm | 300 | 300 |
| Height | mm | 572 | 572 |
| Depth | mm | 205 | 205+35*** |
| Max current | A | 1.6 | 3.2 |
| Inrush current | A | 6 | 11 |
| T Fuse | A | 4 | 6 |
| Power draw EN14511 - A35A35 | W | 230 | 240 |
| Power draw EN14511 - A35A50 | W | 260 | 270 |
| Operating cycle | - | 100% | 100% |
| Electrical connection | - | 4-pin plug | 4-pin plug |
| R134a Refrigerant | kg | 0.13 | 0.13 |
| Max refrigeration circuit pressure | bar | 26 | 26 |
| External air fan capacity | m ³ /h | 280 | 280 |
| Cabinet air fan capacity | m ³ /h | 280 | 280 |
| Internal temperature range | °C | +20 - +46 | +20 - +46 |
| Temperature regulation | - | Electromechanical thermostat, factory set to 35°C | |
| External temperature range | °C | -20 - +55** | -20 - +50 |
| EN60529 ingress protection - cabinet side | - | IP55 | IP55 |
| EN60529 ingress protection - ambient side | - | IP34* | IP34* |
| Noise level | dB (A) | 60 | 60 |
| Weight | kg | 17 | 18 |
| Colour | - | RAL 7035 embossed effect | |
| Conformity | - | CE | CE |

*** Due to external autotransformer dimensions ** 50 °C at 60 Hz

* IP54 rated exterior electrical connections

Performance

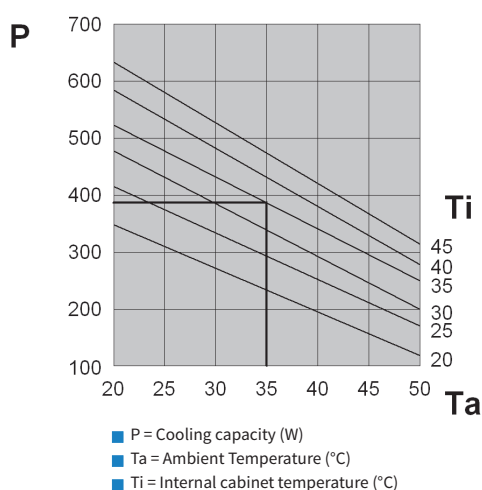

Dimensions

