

Specifications

Max. working pressure	250 bar
Weight	213 kg
Working volume	43 L
Total volume	47 L
Max. cyl. load (start tipping)	345 kN

Max. pump flow

With KO ¹	190 L/min
Without KO ¹	162 L/min
With KO ¹ below -20°C	133 L/min
Without KO ¹ below -20°C	113 L/min

Tipping time

With KO ¹	14 sec
Without KO ¹	16 sec
With KO ¹ below -20°C	20 sec
Without KO ¹ below -20°C	23 sec
Allowable lowering time	14 sec

Extension	1	2	3	4	5	6	7	Total
Effective diameter [mm]	137	118	99					3880
Stroke* [mm]	1280	1300	1300					

Technical notes

- This cylinder is a lifting device only.
- It should not be used as a structural member and should not be subjected to side loads.
- Tipping valve must have a pressure relief at the cylinder port set not higher than max. working pressure.
- Verify max. cyl. load.
- Working temperature range is between -40°C and +80°C.
- Max. duration of extension is 0.5 hours (excluded hard chromed stages).
- Cylinder is painted black (RAL9005) with a min. thickness conforming to the 480 hours neutral salt spray test as per ISO 9227.
- ¹ Hyva knock-off.


Related documentation

Bracket options: 015BRA10 & 015BRA12

Mounting instructions: CYL-0030

Oil specifications: OIL-0011
Spec sheet explanation: CYL-0041

Tipping weight

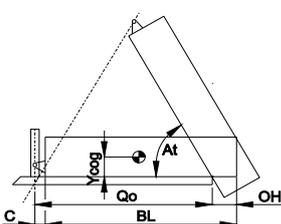

BL	body length
OH	rear overhang
Ycog	vert. pos. centre of gravity
Qo	pivot length
C	bracket length
At	tipping angle
	stroke x 60 / Qo

BL [mm]	5200			4900			4600		
OH [mm]	200	400	600	200	400	600	200	400	600
At [°]	44	46	48	47	49	51	50	52	55
Ycog [mm]									
400	52	55	60	53	58	64	56	61	68
700	56	61	67	58	64	73	62	70	80
1000	61	67	76	65	73	85	70	81	

Tipping weight [ton] at maximum pressure of 250 bar for a vertically mounted cylinder and C is 229 mm

For detailed tipping calculations please refer to: <https://tipper.hyva.com>

Alpha series - Front end cylinder with outer cover





FC A137-3-03880-000-K0343

Item no.

70125200


Pos.	Part no.	Description	Qty.
C01	71839030	DUST COVER FC LOW 15-241	1
C02	71709538	COVER 241-1315 PIN60 A340 FIX	1
C03	01702956 K	WASHER M48 DIN 125B ZP	1
C04	01702907 K	TOPNUT NYLOC M48x3 DIN 985 ZP	1
P01	70463511	PISTON MN2 S 099-1515-HC	1
P02	70209310 K	SLIDER MN 099 (2 x 1/2) A22	1
P03	70216099 K	OUTER STOPRING MN 099 A22	1
P04	70224099	BOTTOM PLATE PISTON MN 099	1
P05	01770580 K	CIRCLIP 90 DIN 472 (95.5x3.5)	1
P06	70260215 K	O-RING PISTON BOTTOM 099	1
P07	70232400	PISTON HEAD MN 099 MK2	1
P08	70260115 K	O-RING 82.14 X 3.53 MM	1

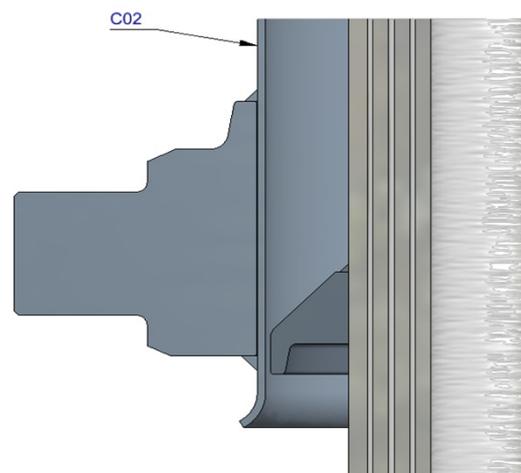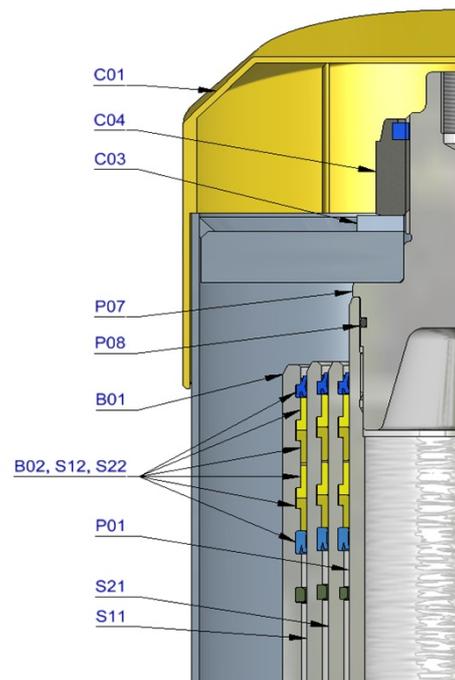

S21	70664510	STAGE MN2 118-1510	1
S22	70203118 K	PACKSET MN 118	1
S23	70209320 K	SLIDER MN 118 (2 x 1/2) A22	1
S24	70216118 K	OUTER STOPRING MN 118 A22	1
S25	70217118 K	LIFTRING MN 118 A22	1

S11	70665510	STAGE MN2 137-1510	1
S12	70203137 K	PACKSET MN 137	1
S13	70207137 K	SLIDER MN 137 A35	1
S14	70216137 K	OUTER STOPRING MN 137 A22	1
S15	70217137 K	LIFTRING MN 137 A22	1

B01	70366510R1215	BASE MN2 157-1549-4/4BSAE-190-C242	1
B02	70203157 K	PACKSET MN 157	1
B03	70225355	BOTTOM PLATE MN2 157	1
B04	70270157 K	SEAL BOTTOM PLATE MN 157	1
B05	70220157	LOCKING PLATE MN 157	3
B06	01732055 K	BOLT HEX M8X20X1.25 SET 6 PCS	1
B07	01732559 K	WASHER SPRING M8 SET 6 PCS	1

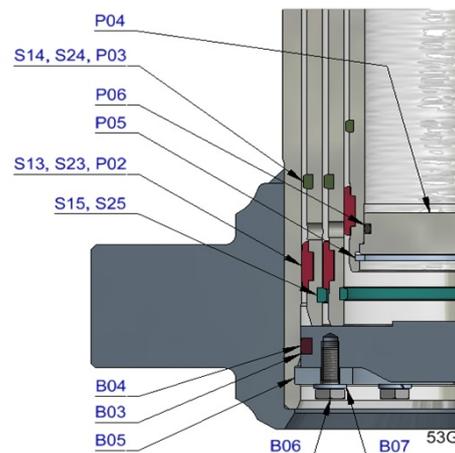

Seal kit complete

	71907530 K	Consists of all packsets with packset grease and O-rings	
--	------------	--	--

Notes

The inner stopring is pre-mounted in the grooves on spare bases and stages. Therefore, when ordering new tubes, it is not required to order inner stoprings separately.

For repair instructions see: CYL-0040. Serial no. is located on type plate and near type plate support.