

* incl. 20 [-5; +30] mm pull out

3D model is available on request

Specifications

Max. working pressure	250 bar
Weight	211 kg
Working volume	33 L
Total volume	37 L
Max. cyl. load (start tipping)	245 kN

Max. pump flow

With KO ¹	151 L/min
Without KO ¹	106 L/min
With KO ¹ below -20°C	106 L/min
Without KO ¹ below -20°C	74 L/min

Tipping time

With KO ¹	13 sec
Without KO ¹	19 sec
With KO ¹ below -20°C	19 sec
Without KO ¹ below -20°C	27 sec
Allowable lowering time	11 sec

Extension	1	2	3	4	5	6	7	Total
Effective diameter [mm]	118	99	80					4235
Stroke* [mm]	1395	1420	1420					

Technical notes

- This cylinder is a lifting device only.
- It should not be used as a structural member and should not be subjected to side loads.
- Tipping valve must have a pressure relief at the cylinder port set not higher than max. working pressure.
- Verify max. cyl. load.
- Working temperature range is between -40°C and +80°C.
- Max. duration of extension is 0.5 hours (excluded hard chromed stages).
- Cylinder is painted black (RAL9005) with a min. thickness conforming to the 480 hours neutral salt spray test as per ISO 9227.
- ¹ Hyva knock-off.


Related documentation

Bracket options: 015BRA10 & 015BRA12

Mounting instructions: CYL-0030

Oil specifications: OIL-0011
Spec sheet explanation: CYL-0041

Tipping weight

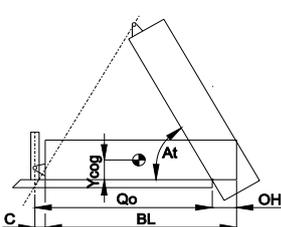

BL	body length
OH	rear overhang
Ycog	vert. pos. centre of gravity
Qo	pivot length
C	bracket length
At	tipping angle
	stroke x 60 / Qo

BL [mm]	5700			5450			5200		
OH [mm]	200	500	800	200	500	800	200	500	800
At [°]	44	47	50	46	49	52	49	52	56
Ycog [mm]									
600	34	38	44	35	40	47	37	42	50
900	37	42	50	39	44	54	40	48	60
1200	40	47	57	42	50		45	55	

Tipping weight [ton] at maximum pressure of 250 bar for a vertically mounted cylinder and C is 178 mm

For detailed tipping calculations please refer to: <https://tipper.hyva.com>

Alpha series - Front end cylinder with outer cover





FC A118-3-04235-000-K0343-HD

Item no.

70114250


Pos.	Part no.	Description	Qty.
C01	71839020	DUST COVER FC LOW 15-219	1
C02	71735632	COVER 219-1445 PIN60 A340 SPH LOCK	1
C03	01702956 K	WASHER M48 DIN 125B ZP	1
C04	01702907 K	TOPNUT NYLOC M48x3 DIN 985 ZP	1
C05	01791930	O-RING COVER D.219	1
C06	15014550 K	BOLT HSHC M12X30X1.75 Q8.8 DIN 912 ZP	1
P01	70471641	PISTON MN3 S 080-1645-HD-HC	1
P02	70207080 K	SLIDER MN 080 (2 x 1/2) A35	1
P03	70216080 K	OUTER STOPRING MN 080 A22	2
P04	70230080	BOTTOM PLATE PISTON MN 080 MK2 HD	1
P05	01745030 K	CIRCLIP 67 DIN 472 (71.5x2.5)	1
P06	70260210 K	O-RING PISTON BOTTOM 080	1
P07	70232305	PISTON HEAD 080 MN3 SOLID	1
P08	70260110 K	O-RING 63.09 X 3.53 MM	1

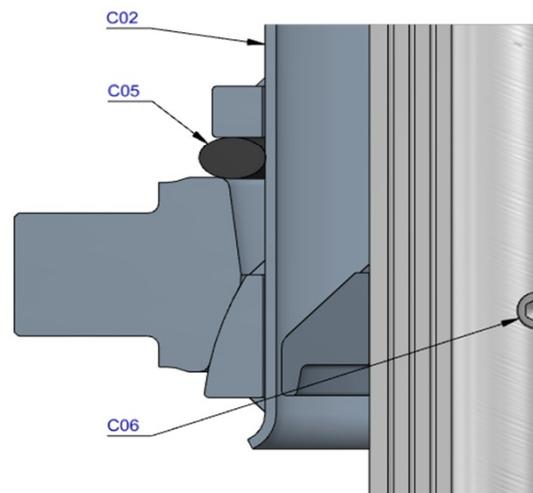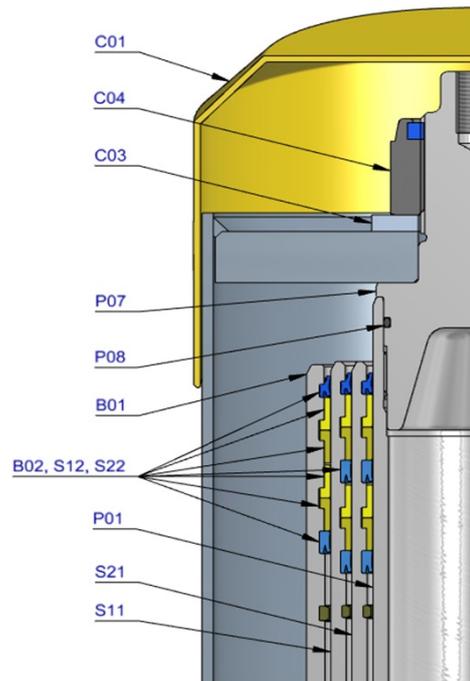

S21	70673640	STAGE MN2 099-1640-HD	1
S22	70202099 K	PACKSET MN 099 TANDEM SEAL	1
S23	70207099 K	SLIDER MN 099 (2 x 1/2) A35	1
S24	70216099 K	OUTER STOPRING MN 099 A22	2
S25	70217099 K	LIFTRING MN 099 A22	1

S11	70674640	STAGE MN2 118-1640-HD	1
S12	70202118 K	PACKSET MN 118 TANDEM SEAL	1
S13	70207118 K	SLIDER MN 118 (2 x 1/2) A35	1
S14	70216118 K	OUTER STOPRING MN 118 A22	1
S15	70217118 K	LIFTRING MN 118 A22	1

B01	70375640R1345	BASE MN2 137-1679-4/4BSAE-190-C219-HD	1
B02	70203137 K	PACKSET MN 137	1
B03	70225350	BOTTOM PLATE MN2 137	1
B04	70270137 K	SEAL BOTTOM PLATE MN 137	1
B05	70220137	LOCKING PLATE MN 137	3
B06	01732055 K	BOLT HEX M8X20X1.25 SET 6 PCS	1
B07	01732559 K	WASHER SPRING M8 SET 6 PCS	1

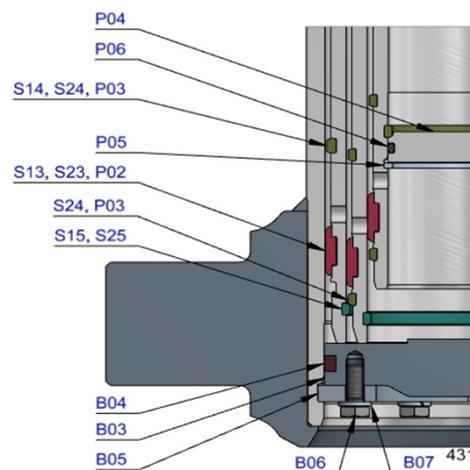

Seal kit complete

	71907431 K	Consists of all packsets with packset grease and O-rings	
--	------------	--	--

Notes

The inner stopring is pre-mounted in the grooves on spare bases and stages. Therefore, when ordering new tubes, it is not required to order inner stoprings separately.

For repair instructions see: CYL-0040. Serial no. is located on type plate and near type plate support.