

Alpha series - Front end cylinder with single eye




FE A191-5-05200-011-K1367-HD*390

Item no.

70537410

Tipping weight

67 - 83 ton

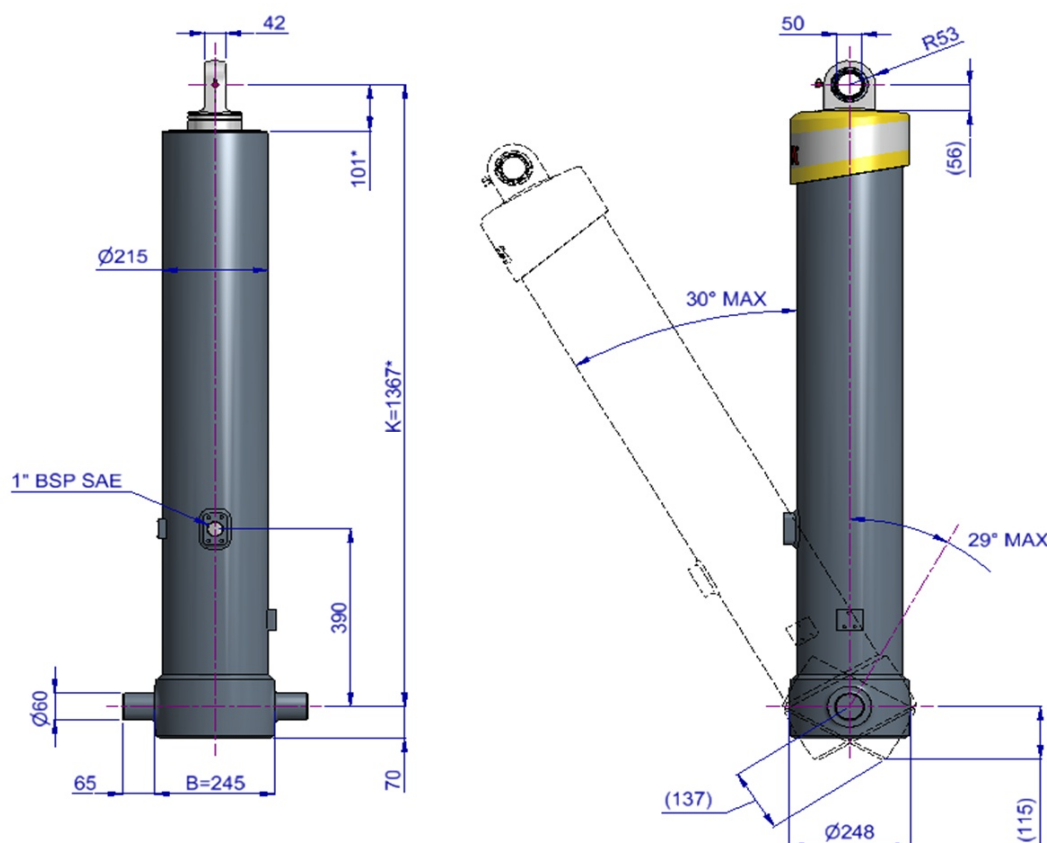

* incl. 20 [-5; +30] mm pull out

3D model is available on request

Specifications

Max. working pressure	250 bar
Weight	253 kg
Working volume	94 L
Total volume	101 L
Max. cyl. load (start tipping)	345 kN

Max. pump flow

With KO ¹	220 L/min
Without KO ¹	190 L/min
With KO ¹ below -20°C	154 L/min
Without KO ¹ below -20°C	133 L/min

Tipping time

With KO ¹	26 sec
Without KO ¹	30 sec
With KO ¹ below -20°C	37 sec
Without KO ¹ below -20°C	43 sec
Allowable lowering time	21 sec

Extension	1	2	3	4	5	6	7	Total
Effective diameter [mm]	191	169	149	129	110			5200
Stroke* [mm]	1015	1040	1045	1050	1050			

Technical notes

• This cylinder is a lifting device only. • It should not be used as a structural member and should not be subjected to side loads. • Tipping valve must have a pressure relief at the cylinder port set not higher than max. working pressure. • Verify max. cyl. load. • Working temperature range is between -40°C and +80°C. • Max. duration of extension is 0.5 hours (excluded hard chromed stages). • Cylinder is painted black (RAL9005) with a min. thickness conforming to the 480 hours neutral salt spray test as per ISO 9227. • ¹ Hyva knock-off.


Related documentation

Bracket options: 015BRA10 & 015BRA13

Mounting instructions: CYL-0031

Oil specifications: OIL-0011
Spec sheet explanation: CYL-0041

Tipping weight

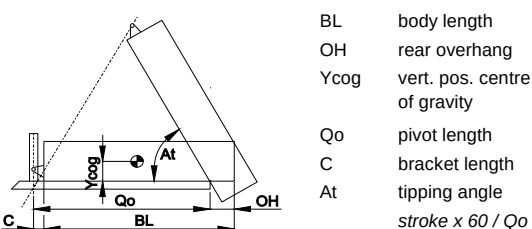

BL [mm]	200	500	800	200	500	800	200	500	800
OH [mm]	45	48	50	47	50	52	49	52	55
At [°]									
Ycog [mm]									
600	67	74	83	69	77		72		
900	73								
1200									

Tipping weight [ton] at maximum pressure of 250 bar for a vertically mounted cylinder and C is 158 mm

For detailed tipping calculations please refer to: <https://tipper.hyva.com>

Alpha series - Front end cylinder with single eye



FE A191-5-05200-011-K1367-HD*390

Item no.

70537410

Pos.	Part no.	Description	Qty.
C01	71839130	DUST COVER FE 169-4/191-5	1
P01	74413301	PISTON FL2 S 110-1280-HD-HC	1
P02	71807112 K	SLIDER FL 110 (2 X 1/2) A35	1
P03	71851110 K	OUTER STOPRING FL 110 A22	2
P04	71822710	BOTTOM PLATE PISTON FL 110 MK2 HD	1
P05	01745021 K	CIRCLIP 97 DIN 472 (102.5x3.0)	1
P06	71870220 K	O-RING PISTON BOTTOM 110	1
P07	71847301	PISTON EYE SPH. FL 110 MK2 L=075 GR	1
P08	01226538 K	O-RING 91.67 X 3.53 MM NBR	1
P09	01770085 K	SPHERICAL BEARING D.50 DO GREASED	1
P10	01770560 K	CIRCLIP 75 DIN 472 (79.5x3.0)	1
P11	71875012	PIN ROUND HEAD GROOVED 8x15 mm	2
P12	56288044 K	GREASE NIPPLE M8x1 DIN 71412	1
P13	01317670 K	GREASER PROTECTION CAP	1

S41	74614300	STAGE FL2 129-1275-HD	1
S42	71808129 K	PACKSET FL 129/HP 129 TANDEM SEAL	1
S43	71807131 K	SLIDER FL 129 (2 X 1/2) A35	1
S44	71851129 K	OUTER STOPRING FL 129 A22	2
S45	71852129 K	LIFTRING FL 129 A22	1

S31	74615300	STAGE FL2 149-1275-HD	1
S32	71808149 K	PACKSET FL 149/HP 150 TANDEM SEAL	1
S33	71807151 K	SLIDER FL 149 A35	1
S34	71851149 K	OUTER STOPRING FL 149 A22	2
S35	71852149 K	LIFTRING FL 149 A22	1


S21	74616300	STAGE FL2 169-1275-HD	1
S22	71808169 K	PACKSET FL 169 TANDEM SEAL	1
S23	71807171 K	SLIDER FL 169 A35	1
S24	71851169 K	OUTER STOPRING FL 169 A22	2
S25	71852169 K	LIFTRING FL 169 A22	1

S11	74617300	STAGE FL2 191-1275-HD	1
S12	71808191 K	PACKSET FL 191 TANDEM SEAL	1
S13	71807193 K	SLIDER FL 191 A35	1
S14	71851191 K	OUTER STOPRING FL 191 A22	1
S15	71852191 K	LIFTRING FL 191 A22	1

B01	74518307	BASE FL2 214-1326-4/4BSAE-390-HD	1
B02	71802214 K	PACKSET FL 214	1
B03	71825435	BOTTOM PLATE FL2 214	1
B04	71870045 K	SEAL BOTTOM PLATE FL 214	1
B05	71820214	LOCKING PLATE FL 214	3
B06	01732020 K	BOLT HEX M12X25X1.25 SET 6 PCS	1
B07	01732523 K	WASHER SPRING M12 SET 6 PCS	1

Seal kit complete

	71908751 K	Consists of all packsets with packset grease and O-rings	
--	------------	--	--

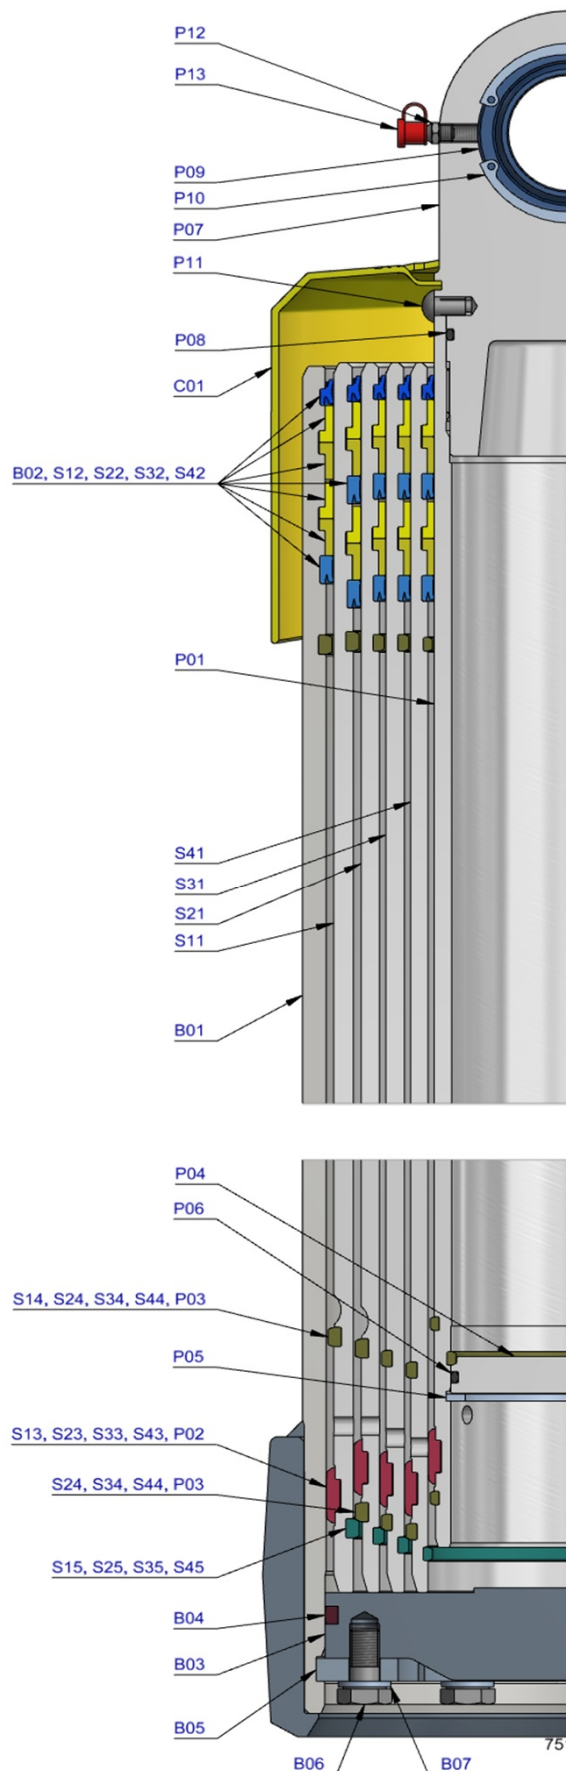

Notes

The inner stopring is pre-mounted in the grooves on spare bases and stages. Therefore, when ordering new tubes, it is not required to order inner stoprings separately.

For repair instructions see: CYL-0040. Serial no. is located on type plate and near type plate support.