

Specifications

Max. working pressure	220 bar
Weight	160 kg
Working volume	48 L
Total volume	52 L
Max. cyl. load (start tipping)	220 kN
Max. cyl. load (end of stroke) ²	80 kN
Max. cyl. load (end of stroke) ³	93 kN

Max. pump flow

With KO ¹	151 L/min
Without KO ¹	106 L/min
With KO ¹ below -20°C	106 L/min
Without KO ¹ below -20°C	74 L/min

Tipping time

With KO ¹	19 sec
Without KO ¹	27 sec
With KO ¹ below -20°C	27 sec
Without KO ¹ below -20°C	39 sec
Allowable lowering time	19 sec

Extension	1	2	3	4	5	6	7	Total
Effective diameter [mm]	137	118	99	80				4980
Stroke* [mm]	1230	1250	1250	1250				

Technical notes

- This cylinder is a lifting device only. • It should not be used as a structural member and should not be subjected to side loads. • Tipping valve must have a pressure relief at the cylinder port set not higher than max. working pressure. • Verify max. cyl. load. • Working temperature range is between -40°C and +80°C. • Max. duration of extension is 0.5 hours (excluded hard chromed stages). • Cylinder is painted black (RAL9005) with a min. thickness conforming to the 480 hours neutral salt spray test as per ISO 9227. • ¹ Hyva knock-off. • ² Unsubstantial unloading (sticky load).
- ³ Substantial unloading.


Related documentation

Bracket options: 015BRA13

Mounting instructions: CYL-0032

Oil specifications: OIL-0011
Spec sheet explanation: CYL-0041

Tipping weight

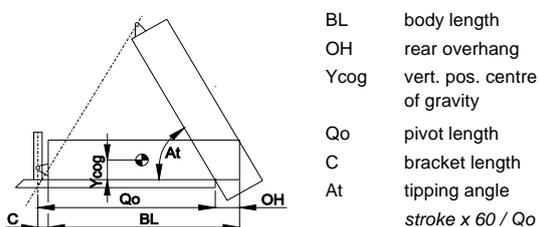


BL [mm]	6600			6400			6200		
OH [mm]	200	500	800	200	500	800	200	500	800
At [°]	46	48	51	47	50	53	49	52	55
Ycog [mm]									
600	30	33	38	31	34	39	32	36	41
900	33	37	42	34	38	45	35	40	48
1200	36	41	48	37	43	52	39	46	

Tipping weight [ton] at maximum pressure of 220 bar for a vertically mounted cylinder and C is 158 mm

For detailed tipping calculations please refer to: <https://tipper.hyva.com>

Pos.	Part no.	Description	Qty.
C01	71839111	DUST COVER FE 129-4/137-4	1
P01	70461441	PISTON MN3 S 080-1445-HC	1
P02	70209300 K	SLIDER MN 080 (2 x 1/2) A22	1
P03	70216080 K	OUTER STOPRING MN 080 A22	1
P04	70224080	BOTTOM PLATE PISTON MN 080	1
P05	01745035 K	CIRCLIP 70 DIN 472 (74.5x2.5)	1
P06	70260210 K	O-RING PISTON BOTTOM 080	1
P07	70235310	PISTON EYE SPH. MN3 080 MK2 L=075	1
P08	70260110 K	O-RING 63.09 X 3.53 MM	1
P09	71875450 K	SPHERICAL BEARING D.50.3 MAINT. FREE	1
P10	01770560 K	CIRCLIP 75 DIN 472 (79.5x3.0)	1
P11	71875012	PIN ROUND HEAD GROOVED 8x15 mm	2

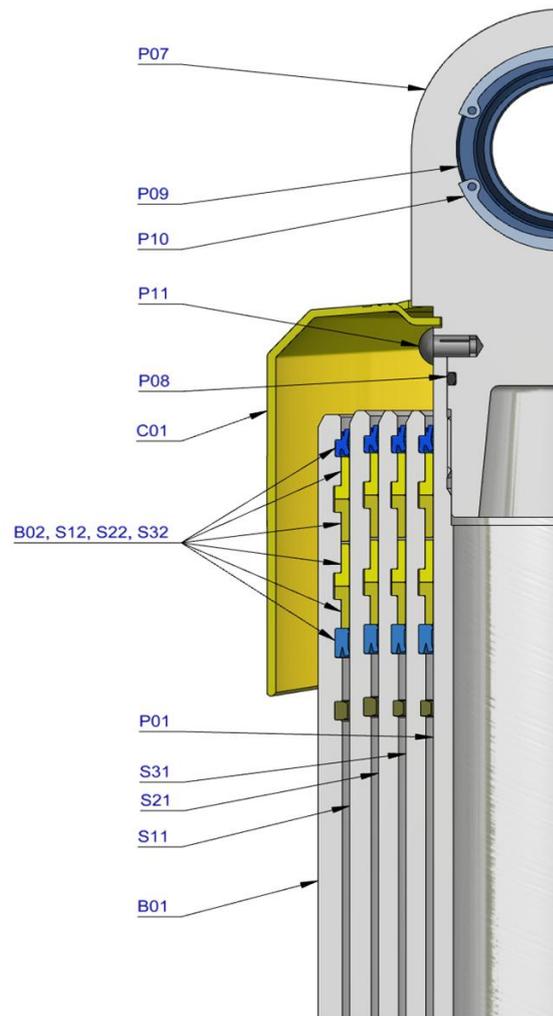


S31	70663440	STAGE MN2 099-1440	1
S32	70203099 K	PACKSET MN 099	1
S33	70209310 K	SLIDER MN 099 (2 x 1/2) A22	1
S34	70216099 K	OUTER STOPRING MN 099 A22	1
S35	70217099 K	LIFTRING MN 099 A22	1

S21	70664440	STAGE MN2 118-1440	1
S22	70203118 K	PACKSET MN 118	1
S23	70209320 K	SLIDER MN 118 (2 x 1/2) A22	1
S24	70216118 K	OUTER STOPRING MN 118 A22	1
S25	70217118 K	LIFTRING MN 118 A22	1

S11	70665440	STAGE MN2 137-1440	1
S12	70203137 K	PACKSET MN 137	1
S13	70207137 K	SLIDER MN 137 A35	1
S14	70216137 K	OUTER STOPRING MN 137 A22	1
S15	70217137 K	LIFTRING MN 137 A22	1

B01	70366450	BASE MN2 E 157-1479-4/4BSAE-330-O219	1
B02	70203157 K	PACKSET MN 157	1
B03	70225355	BOTTOM PLATE MN2 157	1
B04	70270157 K	SEAL BOTTOM PLATE MN 157	1
B05	70220157	LOCKING PLATE MN 157	3
B06	01732055 K	BOLT HEX M8X20X1.25 SET 6 PCS	1
B07	01732559 K	WASHER SPRING M8 SET 6 PCS	1
B08	01793061	EYE TRUNNION TUBE (63-52.5) L=219	1
B09	01746121 K	BOLT LOCKING M8x25 DIN 7991	1
B10	56288044 K	GREASE NIPPLE M8x1 DIN 71412	2
B11	01317670 K	GREASER PROTECTION CAP	2

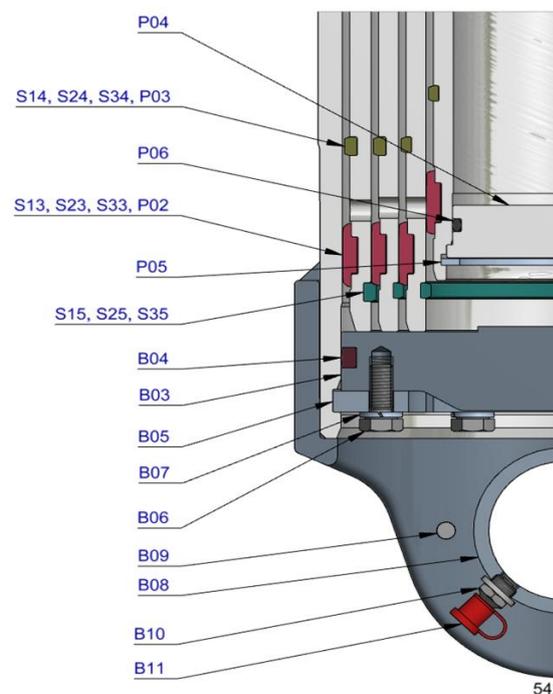

Seal kit complete

	71907540 K	Consists of all packsets with packset grease and O-rings	
--	------------	--	--

Notes

The inner stopring is pre-mounted in the grooves on spare bases and stages. Therefore, when ordering new tubes, it is not required to order inner stoprings separately.