

* incl. 20 [-5; +30] mm pull out

3D model is available on request

Specifications

Max. working pressure	250 bar
Weight	160 kg
Working volume	48 L
Total volume	53 L
Max. cyl. load (start tipping)	245 kN

Max. pump flow

With KO ¹	195 L/min
Without KO ¹	137 L/min
With KO ¹ below -20°C	137 L/min
Without KO ¹ below -20°C	96 L/min

Tipping time

With KO ¹	15 sec
Without KO ¹	21 sec
With KO ¹ below -20°C	21 sec
Without KO ¹ below -20°C	30 sec
Allowable lowering time	12 sec

Extension	1	2	3	4	5	6	7	Total
Effective diameter [mm]	149	129	110	91				4185
Stroke* [mm]	1025	1050	1055	1055				

Technical notes

- This cylinder is a lifting device only.
- It should not be used as a structural member and should not be subjected to side loads.
- Tipping valve must have a pressure relief at the cylinder port set not higher than max. working pressure.
- Verify max. cyl. load.
- Working temperature range is between -40°C and +80°C.
- Max. duration of extension is 0.5 hours (excluded hard chromed stages).
- Cylinder is painted black (RAL9005) with a min. thickness conforming to the 480 hours neutral salt spray test as per ISO 9227.
- ¹ Hyva knock-off.


Related documentation

Bracket options: 015BRA13 & 015BRA17

Mounting instructions: CYL-0032

Oil specifications: OIL-0011
Spec sheet explanation: CYL-0041

Tipping weight

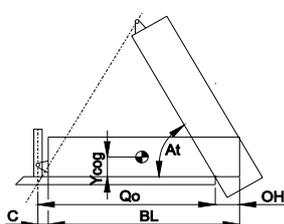


BL	body length
OH	rear overhang
Ycog	vert. pos. centre of gravity
Qo	pivot length
C	bracket length
At	tipping angle
	stroke x 60 / Qo

BL [mm]	5500			5400			5300		
OH [mm]	200	500	800	200	500	800	200	500	800
At [°]	46	49	53	47	50	54	48	51	55
Ycog [mm]									
600	47	53		48	55		48	56	
900	52			53					
1200									

Tipping weight [ton] at maximum pressure of 250 bar for a vertically mounted cylinder and C is 158 mm

For detailed tipping calculations please refer to: <https://tipper.hyva.com>

Pos.	Part no.	Description	Qty.
C01	71839121	DUST COVER FE 149-4/157-4	1
P01	74412301	PISTON FL2 S 091-1280-HD-HC	1
P02	71807093 K	SLIDER FL 091 (2 X 1/2) A35	1
P03	71851091 K	OUTER STOPRING FL 091 A22	2
P04	71822705	BOTTOM PLATE PISTON FL 091 MK2 HD	1
P05	01745020 K	CIRCLIP 78 DIN 472 (82.5x2.5)	1
P06	71870215 K	O-RING PISTON BOTTOM 091	1
P07	71847201	PISTON EYE SPH. FL 091 MK2 L=075 GR	1
P08	01226430 K	O-RING 72.62 X 3.53 MM	1
P09	01770020 K	SPHERICAL BEARING D.50.8 DO OD75 GR.	1
P10	01770560 K	CIRCLIP 75 DIN 472 (79.5x3.0)	1
P11	71875012	PIN ROUND HEAD GROOVED 8x15 mm	2
P12	56288044 K	GREASE NIPPLE M8x1 DIN 71412	1
P13	01317670 K	GREASER PROTECTION CAP	1

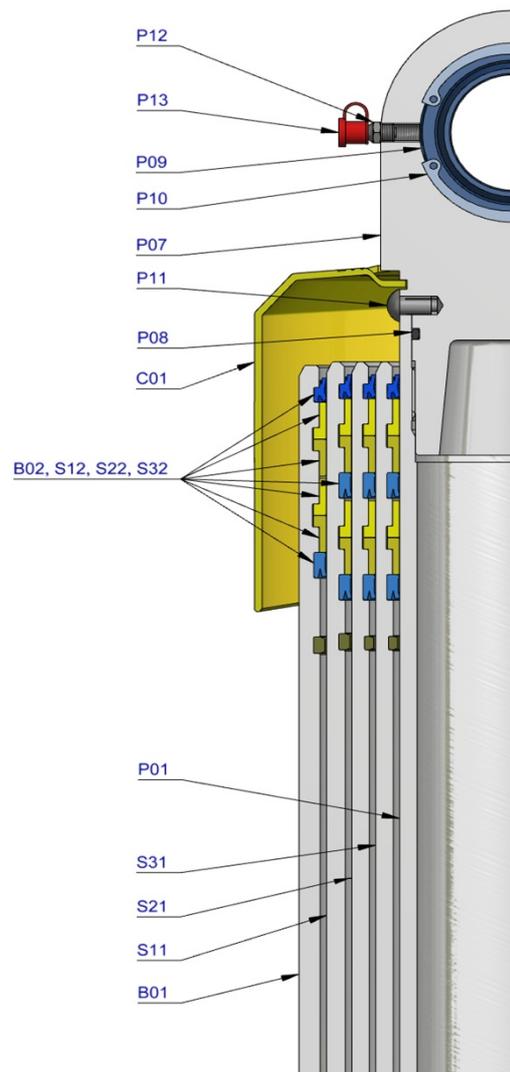


S31	74613300	STAGE FL2 110-1275-HD	1
S32	71808110 K	PACKSET FL 110/HP 110 TANDEM SEAL	1
S33	71807112 K	SLIDER FL 110 (2 X 1/2) A35	1
S34	71851110 K	OUTER STOPRING FL 110 A22	2
S35	71852110 K	LIFTRING FL 110 A22	1

S21	74614300	STAGE FL2 129-1275-HD	1
S22	71808129 K	PACKSET FL 129/HP 129 TANDEM SEAL	1
S23	71807131 K	SLIDER FL 129 (2 X 1/2) A35	1
S24	71851129 K	OUTER STOPRING FL 129 A22	2
S25	71852129 K	LIFTRING FL 129 A22	1

S11	74615300	STAGE FL2 149-1275-HD	1
S12	71808149 K	PACKSET FL 149/HP 150 TANDEM SEAL	1
S13	71807151 K	SLIDER FL 149 A35	1
S14	71851149 K	OUTER STOPRING FL 149 A22	1
S15	71852149 K	LIFTRING FL 149 A22	1

B01	74516312	BASE E 169-1314-4/4NSAE-330/450-O219-HD	1
B02	71802169 K	PACKSET FL 169	1
B03	71825425	BOTTOM PLATE FL2 169	1
B04	71870035 K	SEAL BOTTOM PLATE FL 169	1
B05	71820169	LOCKING PLATE FL 169	3
B06	01732055 K	BOLT HEX M8X20X1.25 SET 6 PCS	1
B07	01732559 K	WASHER SPRING M8 SET 6 PCS	1
B08	01793061	EYE TRUNNION TUBE (63-52.5) L=219	1
B09	01746121 K	BOLT LOCKING M8x25 DIN 7991	1
B10	56288044 K	GREASE NIPPLE M8x1 DIN 71412	2
B11	01317670 K	GREASER PROTECTION CAP	2

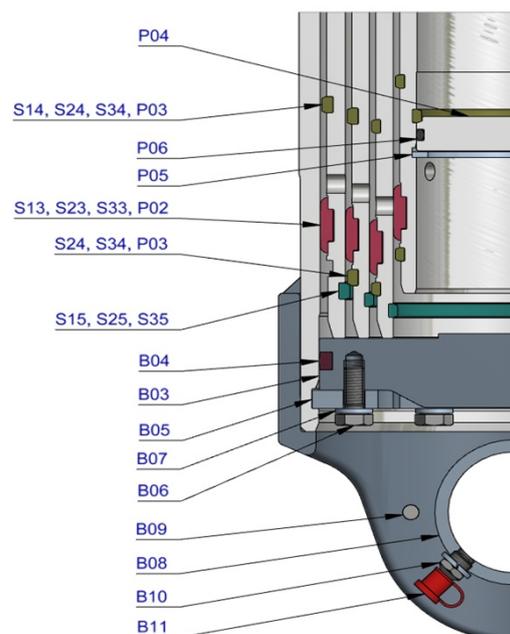

541

Seal kit complete

	71908541 K	Consists of all packsets with packset grease and O-rings	
--	------------	--	--

Notes

The inner stopring is pre-mounted in the grooves on spare bases and stages. Therefore, when ordering new tubes, it is not required to order inner stoprings separately.