

* incl. 20 [-5; +30] mm pull out

3D model is available on request

Specifications

Max. working pressure	250 bar
Weight	175 kg
Working volume	55 L
Total volume	59 L
Max. cyl. load (start tipping)	345 kN

Max. pump flow

With KO ¹	220 L/min
Without KO ¹	162 L/min
With KO ¹ below -20°C	154 L/min
Without KO ¹ below -20°C	113 L/min

Tipping time

With KO ¹	15 sec
Without KO ¹	20 sec
With KO ¹ below -20°C	21 sec
Without KO ¹ below -20°C	29 sec
Allowable lowering time	12 sec

Extension	1	2	3	4	5	6	7	Total
Effective diameter [mm]	157	137	118	99				4165
Stroke* [mm]	1020	1045	1050	1050				

Technical notes

- This cylinder is a lifting device only.
- It should not be used as a structural member and should not be subjected to side loads.
- Tipping valve must have a pressure relief at the cylinder port set not higher than max. working pressure.
- Verify max. cyl. load.
- Working temperature range is between -40°C and +80°C.
- Max. duration of extension is 0.5 hours (excluded hard chromed stages).
- Cylinder is painted black (RAL9005) with a min. thickness conforming to the 480 hours neutral salt spray test as per ISO 9227.
- ¹ Hyva knock-off.


Related documentation

Bracket options: 015BRA13 & 015BRA17

Mounting instructions: CYL-0032

Oil specifications: OIL-0011
Spec sheet explanation: CYL-0041

Tipping weight

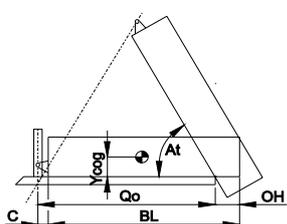

BL	body length
OH	rear overhang
Ycog	vert. pos. centre of gravity
Qo	pivot length
C	bracket length
At	tipping angle
	stroke x 60 / Qo

BL [mm]	5500			5400			5300		
OH [mm]	200	500	800	200	500	800	200	500	800
At [°]	46	49	52	47	50	53	48	51	55
Ycog [mm]									
600	55	63	74	56	64	77	57	66	79
900	61	71		62	74		64	76	
1200	68			70			72		

Tipping weight [ton] at maximum pressure of 250 bar for a vertically mounted cylinder and C is 158 mm

For detailed tipping calculations please refer to: <https://tipper.hyva.com>

Pos.	Part no.	Description	Qty.
C01	71839121	DUST COVER FE 149-4/157-4	1
P01	70473301	PISTON MN2 S 099-1280-HD-HC	1
P02	70207099 K	SLIDER MN 099 (2 x 1/2) A35	1
P03	70216099 K	OUTER STOPRING MN 099 A22	2
P04	70230099	BOTTOM PLATE PISTON MN 099 MK2 HD	1
P05	01745042 K	CIRCLIP 85 DIN 472 (90.5x3.0)	1
P06	70260215 K	O-RING PISTON BOTTOM 099	1
P07	70235401	PISTON EYE SPH. MN 099 MK2 L=075 GR	1
P08	70260115 K	O-RING 82.14 X 3.53 MM	1
P09	01770020 K	SPHERICAL BEARING D.50.8 DO OD75 GR.	1
P10	01770560 K	CIRCLIP 75 DIN 472 (79.5x3.0)	1
P11	71875012	PIN ROUND HEAD GROOVED 8x15 mm	2
P12	56288044 K	GREASE NIPPLE M8x1 DIN 71412	1
P13	01317670 K	GREASER PROTECTION CAP	1

S31	70674300	STAGE MN2 118-1275-HD	1
S32	70202118 K	PACKSET MN 118 TANDEM SEAL	1
S33	70207118 K	SLIDER MN 118 (2 x 1/2) A35	1
S34	70216118 K	OUTER STOPRING MN 118 A22	2
S35	70217118 K	LIFTRING MN 118 A22	1


S21	70675300	STAGE MN2 137-1275-HD	1
S22	70202137 K	PACKSET MN 137 TANDEM SEAL	1
S23	70207137 K	SLIDER MN 137 A35	1
S24	70216137 K	OUTER STOPRING MN 137 A22	2
S25	70217137 K	LIFTRING MN 137 A22	1

S11	70676300	STAGE MN2 157-1275-HD	1
S12	70202157 K	PACKSET MN 157 TANDEM SEAL	1
S13	70207157 K	SLIDER MN 157 A35	1
S14	70216157 K	OUTER STOPRING MN 157 A22	1
S15	70217157 K	LIFTRING MN 157 A22	1

B01	70377312	BASE E 179-1318-4/4NSAE-170/450-O240-HD	1
B02	70203179 K	PACKSET MN 179	1
B03	70225360	BOTTOM PLATE MN2 179	1
B04	70270179 K	SEAL BOTTOM PLATE MN 179	1
B05	70220185	LOCKING PLATE MN2 179	3
B06	01732055 K	BOLT HEX M8X20X1.25 SET 6 PCS	1
B07	01732559 K	WASHER SPRING M8 SET 6 PCS	1
B08	01793071	EYE TRUNNION TUBE (63-52.5) L=240	1
B09	01746121 K	BOLT LOCKING M8x25 DIN 7991	1
B10	56288044 K	GREASE NIPPLE M8x1 DIN 71412	2
B11	01317670 K	GREASER PROTECTION CAP	2

Seal kit complete

	71907641 K	Consists of all packsets with packset grease and O-rings	
--	------------	--	--

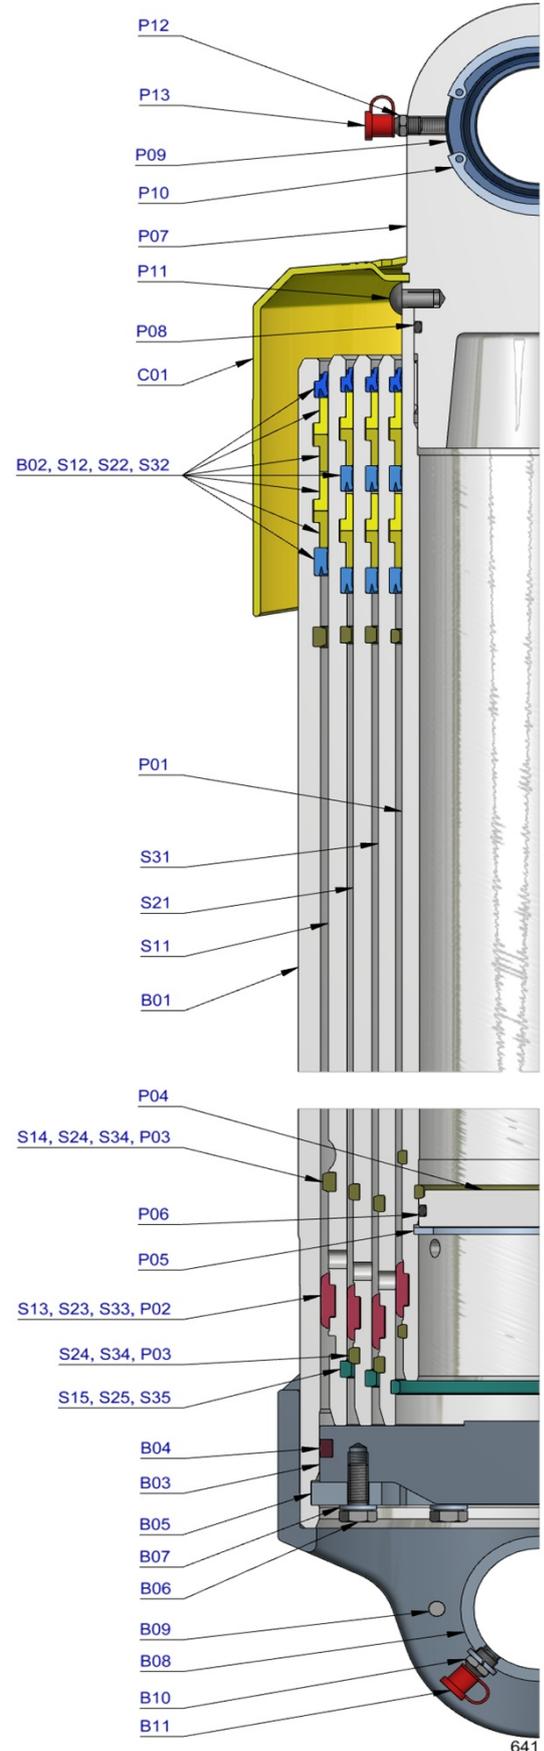

641

Notes

The inner stopring is pre-mounted in the grooves on spare bases and stages. Therefore, when ordering new tubes, it is not required to order inner stoprings separately.