

Installation of Flexible Mouldings

Installatie flexibele lijsten | Installation moulures flexibles
Installation flexibele Leisten | Instalación molduras flexibles



ORAC[®]
DECOR

ORAC nv/sa

Biekorfstraat 32, 8400 Ostend, Belgium

T +32 (0)59 80 32 52 | F +32 (0)59 80 28 10

info@oracdecor.com | www.oracdecor.com

Ready?

Surface & Atmosphere



Dust free
Stofvrij | Sans poussière |
Staubfrei | Libre de polvo



Sand and wash surface
Schuur en reinig de ondergrond | Poncez et
nettoyez la surface | Schleifen und reinigen Sie
den Untergrund | Superficie lavada y arenosa

Storage and installation conditions: Place profiles and adhesives at room temperature 24hrs before installation
Opslag- en plaatsingsvoorwaarden: Plaats profielen en lijmen 24 uur vóór de installatie op kamertemperatuur
Conditions d'installation et de stockage: Stockez les profils et les colles à température ambiante 24 heures avant la pose
Lager- und Installationsbedingungen: Profile und Kleber 24 Stunden vor Verlegung bei Zimmertemperatur lagern
Condiciones de almacenamiento y de instalación: Colocar molduras y adhesivos en el lugar 24 horas antes de la aplicación



Flat wall & ceilings
Vlakke wand en plafond | Mur et
plafond plats | Plane Wand und
Decke | Paredes y techos lisos



Dry
Droog | Sec |
Trocken | Seco



No grease
Vetvrij | Sans
graisse | Fettfrei |
Sin grasa

Set?

DecoFix Adhesives

ONLY FULL GUARANTEE WITH DECOFIX
VOLLEDIGE GARANTIE ENKEL BIJ GEBRUIK VAN DECOFIX
GARANTIE TOTALE UNIQUEMENT AVEC COLLE DECOFIX
VOLLSTÄNDIGE GARANTIE NUR BEI DER VERWENDUNG VON DECOFIX
GARANTÍA COMPLETA SÓLO SI SE UTILIZA DECOFIX

Interior, porous and dry surface

Binnen, poreuze en droge ondergronden
Pose à l'intérieur, surfaces poreuses, pièces non humides
Innen, poröse/saugfähig, und trockene Untergründe
Interior, superficies porosas y secas



Exterior, non-porous and humid surface

Buiten, niet-poreuze en vochtige ondergronden
Pose à l'extérieur, surfaces non poreuses, environnement humide
Außen, nicht-poröser/saugfähige Untergrund und Feuchträume
Exterior, superficies no porosas, ambientes húmedos



Seal wall/ceiling
Verbinding muur/plafond | Collage
mur/plafond | Verbindung Wand/Decke
| Adherencia techos/paredes



DecoFix Pro
Strong, water-based acrylic installation adhesive

FDP500 310ml | 7 > 8m
FDP600 4200ml | 65 > 110m



or
of | ou |
oder | o



DecoFix Hydro
Very strong MS-Polymer-based installation adhesive

FDP700 290 ml | 7 > 8m



Joints between mouldings*
Verbinding tussen profielen | Joints entre les
profilis | Nahtverbindungen zwischen Profilen |
Uniones de los perfiles












DecoFix Extra
Polyurethane-based adhesive

FX200 310ml | min. 80m
FX210 tube 80ml | min. 20m



Go!

Installation of Flexible Mouldings

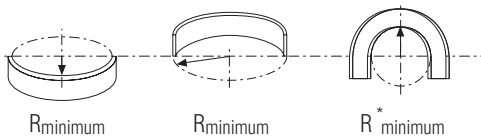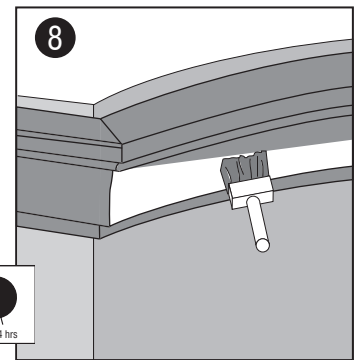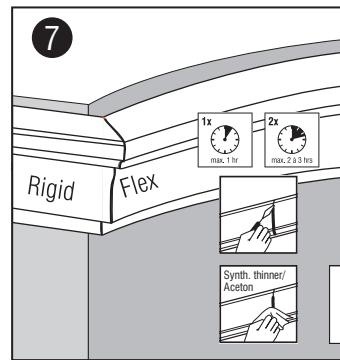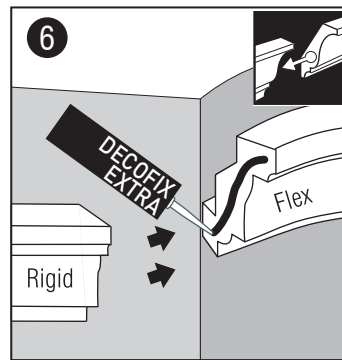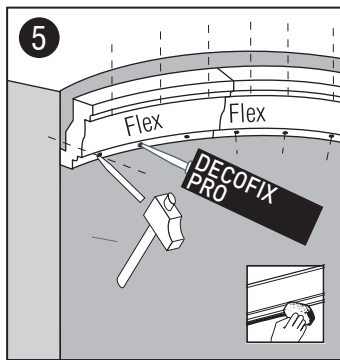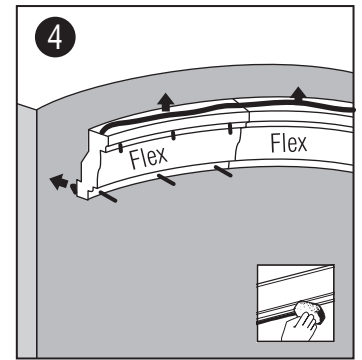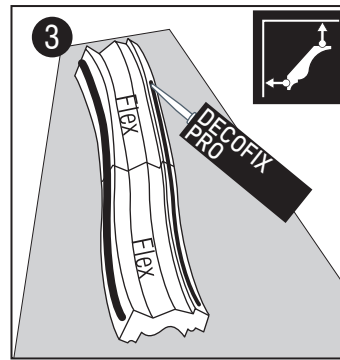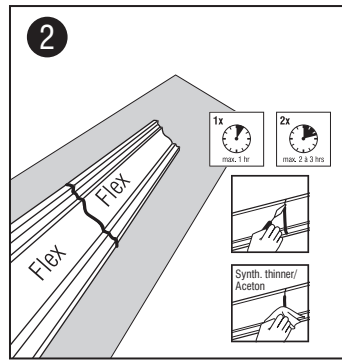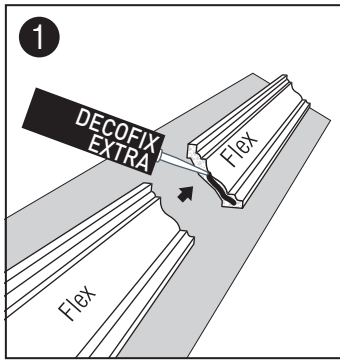

Kroonlijsten / Corniches / Cornice Mouldings / Eckleisten / Cornisas

LUXXUS	Rmin (cm)	Rmin (cm)	
C200F	160	C322F	160
C201F	200	C331F	420
C211F	250	C333F	300
C212F	120	C334F	380
C213F	280	C339F	380
C214F	140	C341F	400
C215F	160	C373F	100
C216F	340	C374F	130
C217F	380	C402F	300
C218F	360	C602F	100
C220F	400	C901F	600
C230F	150	C902F	600
C240F	270		
C250F	70	AXXENT	
C260F	130	CX100F	200
C301F	320	CX109F	160
C302F	250	CX110F	180
C303F	180	CX124F	160
C304F	250	CX127F	240
C308F	120	CX132F	70
C321F	140	CX148F	180

Wandlijsten / Cimaises / Panel Mouldings / Wand - und Friesleisten / Molduras

LUXXUS	Rmin (cm)	R*min (cm)	Rmin (cm)	R*min (cm)	
P1020F	30	80	P9010F	40	310
P2020F	30	80	P9020F	30	/
P3020F	50	180	P9040F	30	80
P4020F	40	200	P9050F	20	60
P5020F	30	/	P9900F	20	250
P5021F	20	70	P9901F	20	180
P6020F	30	250			
P7010F	20	/	AXXENT		
P7020F	30	/	DX157F	35	260
P7030F	30	250	PX103F	20	80
P7040F	40	320	PX120F	30	110
P7070F	30	230	PX144F	20	220
P8020F	40	130			
P8030F	20	70			
P8040F	30	/			
P8050F	80	200			
P8060F	80	200			

Plinten / Plinthes / Skirting / Sockelleisten / Zócalos

LUXXUS	Rmin (cm)	R*min (cm)
SX105F	30	/
SX118F	40	/
SX155F	30	/

AXXENT	Rmin (cm)	R*min (cm)
CX132F	70	/
DX157F	35	260
SX165F	40	/

Installation Video



& other manuals: scan the QR code

