

РЕДУКТОРЫ ЧЕРВЯЧНЫЕ СЕРИЯ RV

Размеры фланца и выходного вала редуктора

Тип					Передаточное число i										
	Тип фланца	N	M	P	7,5	10	15	20	25	30	40	50	60	80	100
					Диаметр D										
25	56B14	50	65	80	9	9	9	9	-	9	9	9	9	-	-
30	63B5	95	115	140	11	11	11	11	11	11	11	11	-	-	-
	63B14	60	75	90	11	11	11	11	11	11	11	11	-	-	-
	56B14	50	65	80	9	9	9	9	9	9	9	9	9	9	-
40	71B5	110	130	160	14	14	14	14	14	14	14	14	-	-	-
	63B5	90	115	140	11	11	11	11	11	11	11	11	11	11	11
50	80B5	130	165	200	19	19	19	19	19	19	19	-	-	-	-
	71B5	110	130	160	14	14	14	14	14	14	14	14	14	14	-
	63B5	95	115	140	-	-	-	-	-	-	11	11	11	11	11
63	90B5	130	165	200	24	24	24	24	24	24	24	-	-	-	-
	80B5	130	165	200	19	19	19	19	19	19	19	19	19	-	-
	71B5	110	130	160	-	-	-	-	-	-	14	14	14	14	14
75	100/112B5	180	215	250	28	28	28	28	-	28	-	-	-	-	-
	90B5	130	165	200	24	24	24	24	24	24	24	24	24	-	-
	80B5	130	165	200	-	-	-	-	-	-	19	19	19	19	19
90	100/112B5	180	215	250	28	28	28	28	28	28	28	28	-	-	-
	90B5	130	165	200	24	24	24	24	24	24	24	24	24	24	-
	80B5	130	165	200	-	-	-	-	-	-	19	19	19	19	19
110	132B5	230	265	300	38	38	38	38	38	-	-	-	-	-	-
	100/112B5	180	215	250	28	28	28	28	28	28	28	28	28	-	-
	90B5	130	165	200	-	-	-	-	24	24	24	24	24	24	24
130	132B5	230	265	300	38	38	38	38	38	38	38	38	-	-	-
	100/112B5	180	215	250	-	-	-	-	28	28	28	28	28	28	28
	90B5	130	165	200	-	-	-	-	-	-	24	24	24	24	24

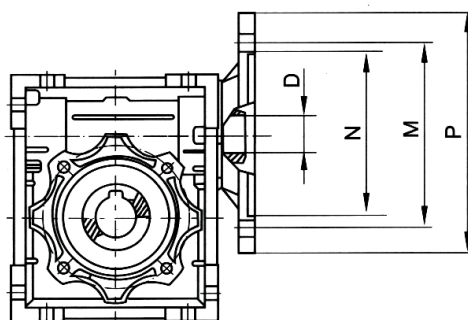


Таблица геометрических параметров червячных редукторов

типа размера 030 - 130

Type	Диаметр мм. (Dimensions)																		
	A	C	D(H7)	E	F	G	H	I	L	M	N(h8)	O	P	Q	R	S	T	V	K
30	54	80	14	97	32	≤54	40	30	56	65	54	6.5	75	44	57	5.5	20	27	44
40	70	101	18	121.5	43	≤62	50	40	71	75	60	6.5	87	55	71.5	6.5	23	35	60
50	80	121.5	25	144	49	≤90	60	50	85	85	70	8.5	100	64	85	7	30	40	70
63	100	147.5	25	174	67	≤106	72	63	103	95	80	8.5	110	80	102	8	40	50	85
75	120	174	28	205	72	≤121	86	75	113	115	95	11	140	93	119	10	50	60	90
90	140	208	35	238	72	≤138	103	90	130	130	110	13	160	102	135	11	50	70	100
110	170	252.5	42	295		≤159	127.5	110	142	165	130	14	200	125	166.5	15	60	85	115
130	200	292.5	45	335		≤179	147.5	130	155	215	180	16	250	140	187.5	15	80	100	120

Type	Диаметр мм. (Dimensions)																
	G1	g	N1	KA		KB	KC	KE	α	KM	KN(H8)	KO	KP	KQ	d(j6)	b	t1
				F	FL												
30	63	20	29	54.5		6	4	M6×11(n4)	0°	68	50	6.5(4/90°)	80	70	9	5	16.3
40	78	23	36.5	67	97	7	4	M6×8(n4)	45°	87	60	9(4/90°)	110	95	11	6	20.8
50	92	30	43.5	90	120	9	5	M8×10(n4)	45°	90	70	11(4/90°)	125	110	14	8	28.3
63	112	40	53	82	112	10	6	M8×14(n8)	45°	150	115	11(4/90°)	180	142	19	8	28.3
75	120	40	57	111		13	6	M8×14(n8)	45°	165	130	14(4/90°)	200	170	24	8	31.3
90	140	45	67	111		13	6	M10×18(n8)	45°	175	152	14(4/90°)	210	200	24	10	38.3
110	155	50	74	139		15	6	M10×18(n8)	45°	220	170	14(8/90°)	270	250	28	12	45.3
130	170	60	81	151.5		15	6	M12×20(n8)	45°	255	180	16(8/45°)	320	290	30	14	48.8

Чертеж червячного редуктора 030 - 130

