




Series
A-240/A-250

Perforated or Spiral Cooling Tower

Protect Instrumentation in High Temperature Applications

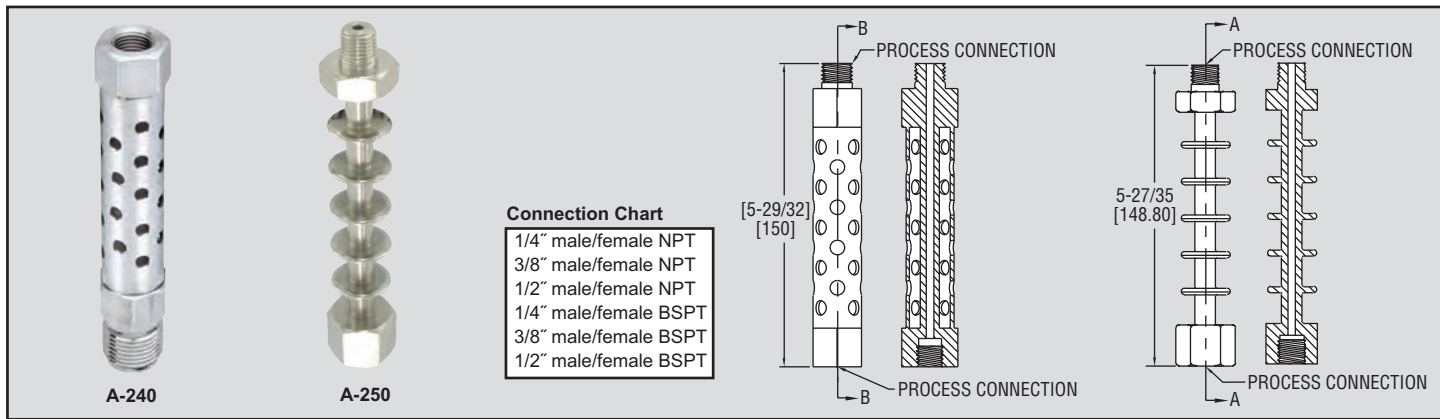

Connection Chart

1/4" male/female NPT
3/8" male/female NPT
1/2" male/female NPT
1/4" male/female BSPT
3/8" male/female BSPT
1/2" male/female BSPT

The Perforated and Spiral Cooling Towers protect pressure instruments during high temperature applications. Both the spiral and perforated styles are made with 316L stainless steel and are available with various process connections in NPT or BSPT style. Both Cooling Towers are ideal for use with pressure gages, switches, and transmitters where the process media temperature exceeds the rating of the instrument.

SPECIFICATIONS

- Service:** Compatible liquids and gases.
- Wetted Parts:** 316L SS.
- Temperature Limits:** 428°F (220°C).
- Pressure Limits:** 5800 psi (400 bar).
- Process Connections:** See chart.
- Height:** 6" (150 mm).
- Weight:** 8 oz (227 g).

Model	Style	Connections	Model	Style	Connections
A-240-A	Perforated	1/4" male/female NPT	A-250-A	Spiral	1/4" male/female NPT
A-240-B	Perforated	3/8" male/female NPT	A-250-B	Spiral	3/8" male/female NPT
A-240-C	Perforated	1/2" male/female NPT	A-250-C	Spiral	1/2" male/female NPT
A-240-D	Perforated	1/4" male/female BSPT	A-250-D	Spiral	1/4" male/female BSPT
A-240-E	Perforated	3/8" male/female BSPT	A-250-E	Spiral	3/8" male/female BSPT
A-240-F	Perforated	1/2" male/female BSPT	A-250-F	Spiral	1/2" male/female BSPT