



A brand of
MATRIX
L I G H T I N G

VIRIBRIGHT Dimmer


VIRIBRIGHT™ Dimmer is designed to be fully compatible with the VIRIBRIGHT™ dimmable LED lighting products and most of the dimmable LED lighting devices in the market. Without flickering, lights dropping out, VIRIBRIGHT™ Dimmer can keep the lights on even with line voltage fluctuations. VIRIBRIGHT Dimmer is setting the benchmark for price and performance.

General Specifications

Switch Type	Push ON/OFF / Rotate to adjust light level
Compatible Lighting Devices	Dimmable LED Bulbs / Incandescent Bulbs
Load	Adjustable Min. Load
Operating Voltage	220 -240V AC, 1A / 110 -120V AC, 2A
Maximum Power	200W
Control Type	Single Pole (One Location)
Configuration	Leading Edge or Trailing Edge
Available Color	White / Ivory



Wiring Connection

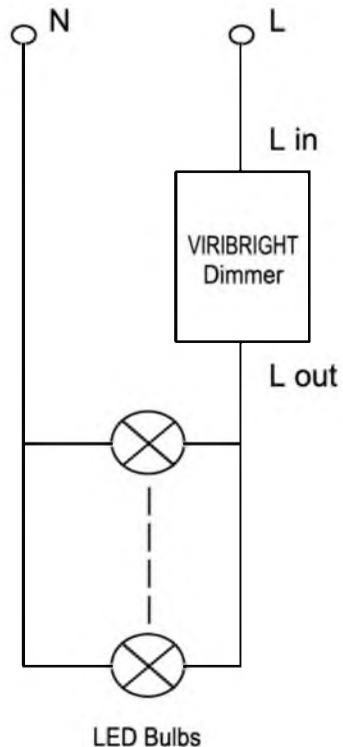

Maximum VIRIBRIGHT Light Bulbs Connection

VIRIBRIGHT Dimmer Bulb Loading Table

	VIRIBRIGHT bulbs	Operating Voltage (AC)	Current	Hz	Max. no. of bulbs	Dimmer type
1	PAR38	110-120V	2A	60Hz	6PCS	Trailing Edge
2	PAR38	220-240V	1A	50Hz	9PCS	Trailing Edge
3	4.5W spotlight	110-120V	2A	60Hz	40PCS	Trailing Edge
4	4.5W spotlight	220-240V	1A	50Hz	40PCS	Trailing Edge
5	8W globe bulb	110-120V	2A	60Hz	20PCS	Trailing Edge
6	8W globe bulb	220-240V	1A	50Hz	20PCS	Trailing Edge
7	10W globe bulb	110-120V	2A	60Hz	10PCS	Trailing Edge
8	10W globe bulb	220-240V	1A	50Hz	15PCS	Trailing Edge

